

Flat Drill

2ZDK-HP Series




New Generation Flat Bottom Drill for High Precision Machining in a Wide Range of Applications

Stable Machining in a Wide Range of Applications Including Counterboring and Drilling in Cylinder Surfaces

Chisel Edge with S-curve Reduces Shock during Machining

2ZDK-HP Short Type Lineup Expansion

New 2ZDK-HP-OH with Internal Coolant for Stainless Steel Machining

**NEW**

With Internal Coolant
2ZDK-HP-OH




Flat Drill

2ZDK-HP Series


Next Generation Flat Bottom Drill. Stable Machining in a Wide Range of Applications Including Counterboring and Drilling in Cylinder Surfaces. OH type with Internal Coolant for Stainless Steel Machining

SOLUTION


Great solution for a variety of machining applications




Drilling in Cylinder and Curved Surfaces




Hole Counterboring




Plunging of Thin Plate




Turning in Automatic Lathes




Hole Expanding




Flat Bottom Finishing after Drilling



Flat bottom holes with a single tool



Counterboring on Slant Surface/Spotting for Secondary Process



Large Lineup

Standard Type

2ZDK-HP

Economical Drilling

Large lineup with 2 drilling depths available



P K

Internal Coolant Type

NEW

2ZDK-HP-OH

With oil holes (OH)


High efficiency and stable machining

For stainless steel machining



P M K

Lineup

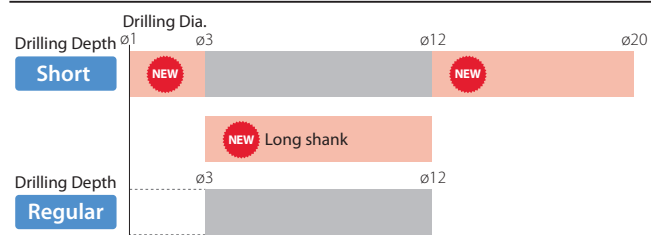

Lineup



MEGACOAT NANO


High hardness and excellent oxidation resistance with a special Multilayer Nano Coating
Stable machining and long tool life

2ZDK-HP

Standard Economy Type

Large Lineup with 2 Drilling Depths Available


Expanded of Drilling Diameter Range with New Long Shank Styles

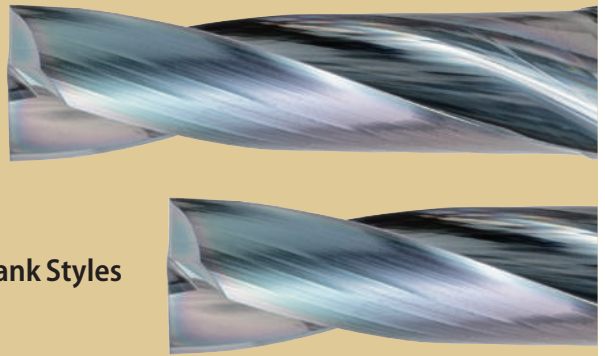


1 Chisel Edge with S-curve Provides High Precision and Stable Machining Results

Special Chisel Edge

Reduced Impact Forces when Entering the Workpiece and Provides Excellent Vibration Control for High Precision Drilling



Cutting Force Comparison (Internal evaluation)

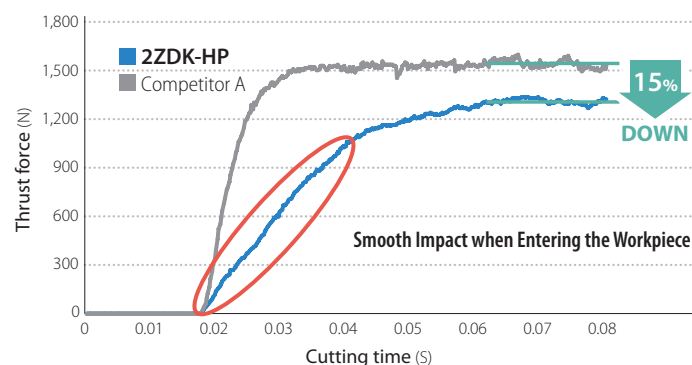


Cutting Conditions: $n = 1,800 \text{ min}^{-1}$, $V_f = 400 \text{ mm/min}$, Drilling Depth 10 mm, Dry Workpiece: S50C Drilling Dia. $\phi 12 \text{ mm}$ (Regular)

Excellent chip evacuation and finely breaks chips into small pieces

Suppress cutting edge damage with lower cutting force on the center of cutting edge

Chip generation simulation comparison (Image) (Internal evaluation)

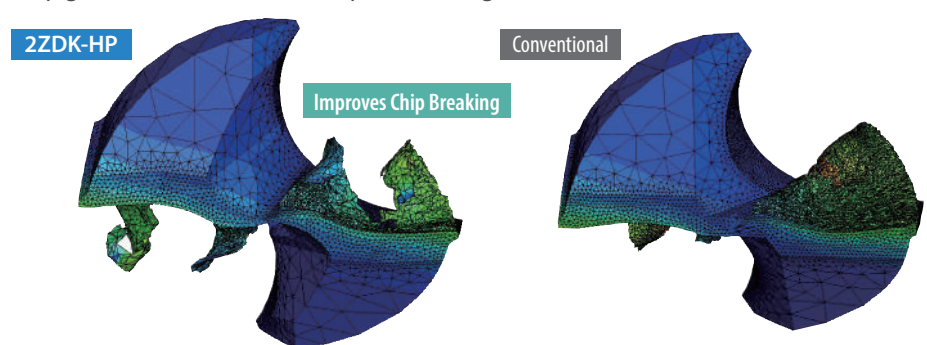


2 Low Cutting Force Minimizes Burrs


Low Cutting Force with Flat Bottom and Sharp Cutting Edge

Minimizes Burrs

Low Cutting Force Corner Edge Design

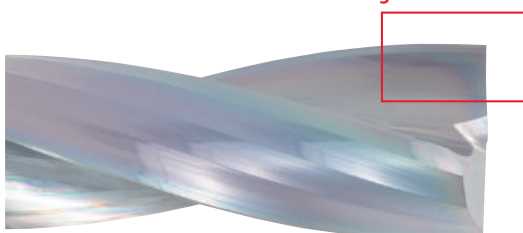

Burr Formation Comparison (Internal evaluation)

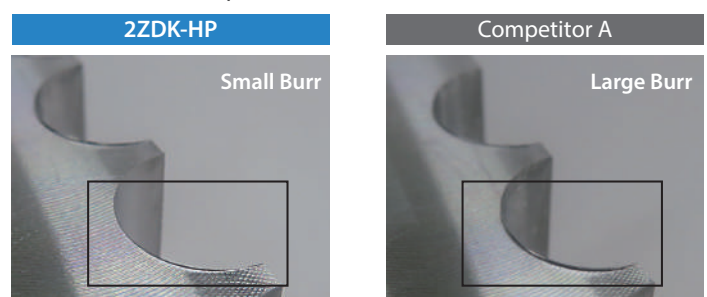


Cutting Conditions: $n = 1,800 \text{ min}^{-1}$, $V_f = 300 \text{ mm/min}$, Drilling Depth 15 mm, Wet Drilling Dia. $\phi 12 \text{ mm}$ (Regular) Workpiece: SCM 435

Excellent Cutting Performance (Internal evaluation)

Drilling in Flat Surface


Drilling Dia.: ϕ 3.5 mm

Stable and High Precision Machining with Less Variation in Hole Diameter
Excellent Cutting Edge Condition

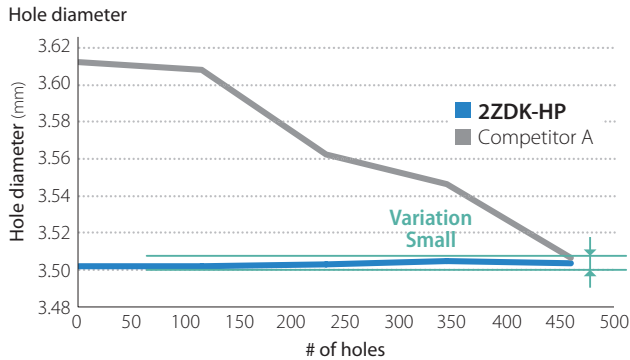


Cutting Conditions: $n = 6,000 \text{ min}^{-1}$, $V_f = 360 \text{ mm/min}$, Drilling Depth 5 mm, Wet
Drilling Dia. ϕ 3.5 mm (Regular) Workpiece: SCM 440

Cutting Edge after Machining 500 holes

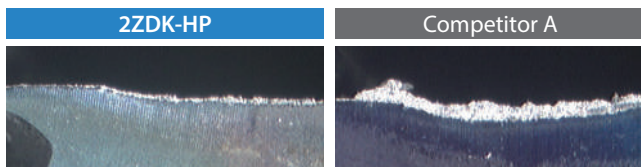

Drilling Dia.: ϕ 12 mm

Long shank type provides improved stability



Set longer overhang amount (122 mm)
Performance comparison without pilot hole

Competitor showed chattering and breakage due to long overhang amount.
2ZDK-HP reduces impact forces when entering the workpiece and provides stable machining without pilot holes




Cutting Conditions: $n = 2,400 \text{ min}^{-1}$, $V_f = 600 \text{ mm/min}$, Drilling Depth 12 mm, Wet
Drilling Dia. ϕ 12 mm (Regular, long shank) Workpiece: SCM 440

Drilling in Cylindrical Face


Drilling Dia.: ϕ 3.5 mm

Stable and High Precision Machining with Less Variation in Hole Diameter

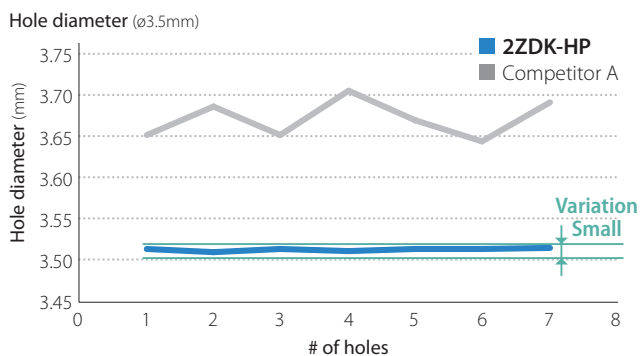

Burr Comparison


Drilling in Cylindrical Surface

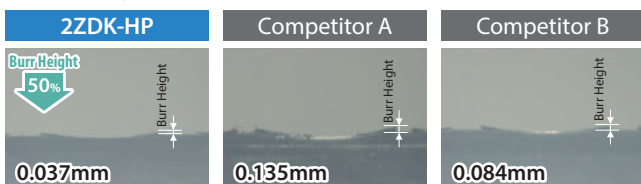


Cutting Conditions: $n = 7,000 \text{ min}^{-1}$, $V_f = 420 \text{ mm/min}$, Wet Drilling Dia. ϕ 3.5 mm (Regular)
Workpiece: Carbon steel pipe ϕ 17.3 mm (Thickness 3.2 mm)

Drilling Dia.: ϕ 12 mm

Minimizes Hole Diameter Variation even at Feed Rates as High as 0.3mm/rev.
Stable Machining without Chip Clogging

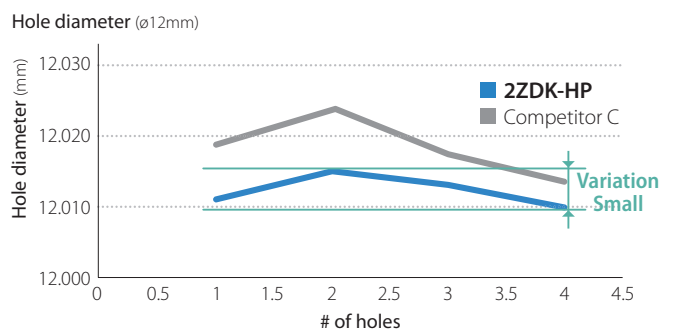

Surface Finish and Chips

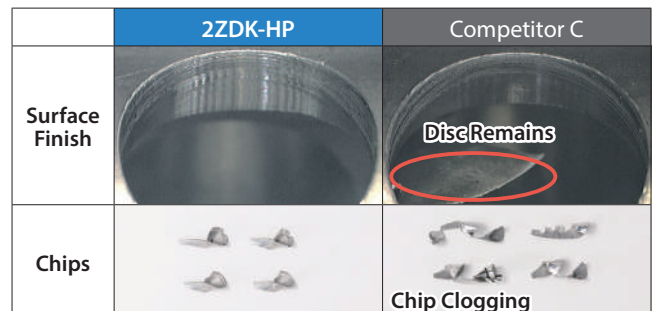

Cutting Conditions: $n = 1,800 \text{ min}^{-1}$, $V_f = 540 \text{ mm/min}$, Wet Drilling Dia. ϕ 12 mm (Regular)
Workpiece: Carbon steel pipe ϕ 25 mm (Thickness 4 mm)

2ZDK-HP-OH

Coolant-Through Holes for Efficient and Stable Machining of Stainless Steel Machining

NEW


1

Flat Bottom Drill with Internal Coolant for Stainless Steel

Internal coolant can double machining efficiency. Reduces chip clogging and fractures


Stainless Steel with Internal Coolant (Internal evaluation)

2ZDK-HP-OH
(Internal Coolant)

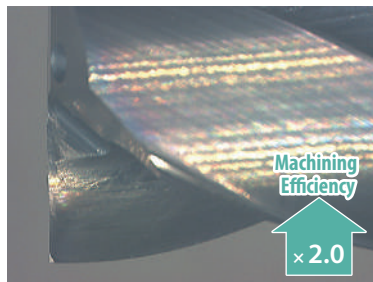

Cutting Conditions: $V_c = 100$ m/min, $f = 0.2$ mm/rev, Wet (Internal coolant)

Conventional
(External Coolant)

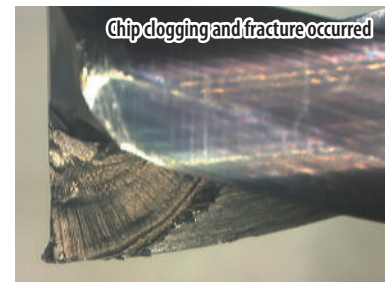


Cutting Conditions: $V_c = 40$ m/min, $f = 0.1$ mm/rev, Wet (External coolant)

SOLUTION 1

2ZDK-HP-OH (Internal coolant) showed 1.5 times machining efficiency. Higher machining accuracy

(User evaluation)

Machine part
SUS 304



Machining Efficiency

2ZDK-HP-OH
(Internal coolant)

$V_f = 260$ mm/min

$f = 0.15$ mm/rev

Competitor A
(External coolant)

$V_f = 173$ mm/min

$f = 0.1$ mm/rev

Machining
Efficiency

$\times 1.5$


$n = 1,730$ min⁻¹ ($V_c = 60$ m/min), $V_f = 260$ mm/min ($f = 0.15$ mm/rev),
Drilling Depth 4-5 mm, Wet (External + Internal coolant) Drilling Dia. $\phi 11$

SOLUTION 2

Tool life was 1.5 times longer than that of Competitor A with internal coolant

(User evaluation)

Automotive Part
Equivalent to
SUS 630



Tool Life

2ZDK-HP-OH
(Internal coolant)

2,400 pcs/drill

Competitor A
Internal Coolant

1,600 pcs/drill

External Coolant

1,000 pcs/drill

Tool Life

$\times 1.5$

$n = 2,500$ min⁻¹ ($V_c = 75$ m/min), $V_f \sim 320$ mm/min ($\sim f = 0.13$ mm/rev),
Drilling Depth 16 mm, Wet Drilling Dia. $\phi 9.6$

2


Fine-Tuned Design for Advanced Cutting Performance

High-precision, stable machining with five advantages

Both sharpness and edge strength, which are difficult to achieve with conventional tools


1 Special Chisel Edge

High rigidity and excellent chip control

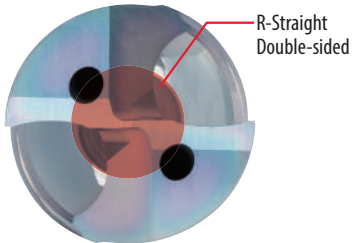


2 Corners: Flat Land

Sharpness and chipping resistance




3 Unique Flute Shape

Optimized chip evacuation and rigidity




4 Micro Honing

Maintains sharpness and improves abrasion resistance




Wear Resistance Comparison
(Internal evaluation)




5 Double Margin

High-precision machining with guiding action




Cutting Conditions: $n = 3,800 \text{ min}^{-1}$, $V_f = 950 \text{ mm/min}$, Drilling Depth 20 mm
Wet (Internal coolant) Drilling Dia. $\phi 10 \text{ mm}$ Workpiece: S 45 C

Cutting Force Comparison (Internal evaluation)

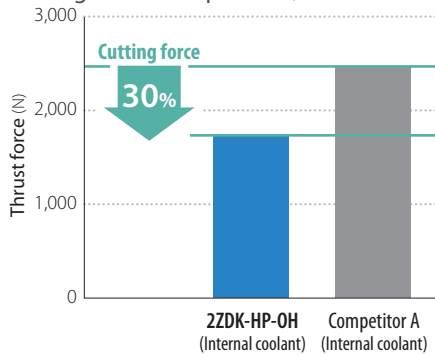

Cutting Conditions: $n = 3,180 \text{ min}^{-1}$, $V_f = 800 \text{ mm/min}$, Drilling Depth 12 mm
Wet Drilling Dia. $\phi 12 \text{ mm}$ Workpiece: SCM 440

Burr Formation Comparison (Internal evaluation)

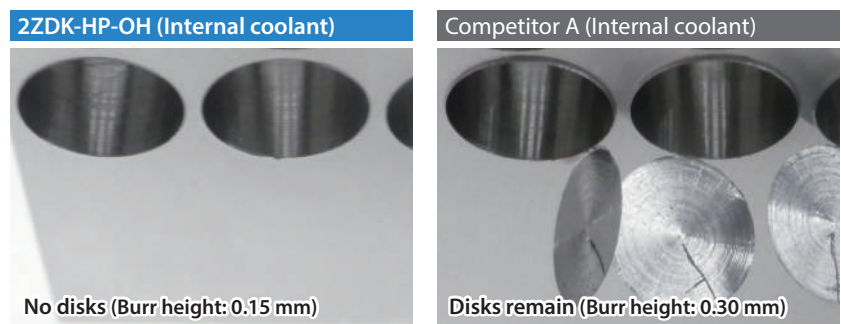


Cutting conditions: $n = 3,800 \text{ min}^{-1}$, $V_f = 950 \text{ mm/min}$, Drilling Depth 20 mm,
Wet Drilling Dia. $\phi 10 \text{ mm}$ Workpiece: S 45 C

2ZDK-HP-OH is lower in cutting force. There is no remaining disk and the sharpness is good.

SUS 304 Cutting Performance Comparison (Internal evaluation)

2ZDK-HP-OH (Internal coolant)


$V_f = 760 \text{ mm/min}$

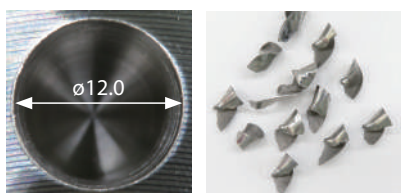

Machining Efficiency
 $\times 1.2$

Competitor A (Internal coolant)

$V_f = 630 \text{ mm/min}$

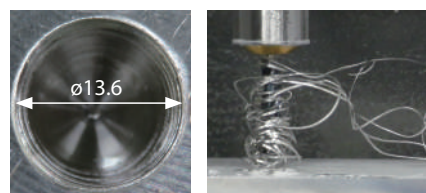


Cutting Conditions: $n = 2,650 \text{ min}^{-1}$, Drilling Depth 24 mm, Wet Drilling Dia. $\phi 12 \text{ mm}$


2ZDK-HP-OH showed 1.2 times machining efficiency in stainless steel machining. Also showed stable cutting diameter and good chip control.

2ZDK-HP Stock Items Drilling Depth Short

Short



No. of flutes (Z) = 2 Helix Angle: 20 °



Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK010HP-1.5D	●	1.0	$0_{-0.010}$	3.5	4.3	4	50	Fig.1
2ZDK011HP-1.5D	●	1.1	$0_{-0.010}$	3.9	4.7	4	50	Fig.1
2ZDK012HP-1.5D	●	1.2	$0_{-0.010}$	4.3	5.1	4	50	Fig.1
2ZDK013HP-1.5D	●	1.3	$0_{-0.010}$	4.7	5.5	4	50	Fig.1
2ZDK014HP-1.5D	●	1.4	$0_{-0.010}$	5.1	5.9	4	50	Fig.1
2ZDK015HP-1.5D	●	1.5	$0_{-0.010}$	5.5	6.3	4	50	Fig.1
2ZDK016HP-1.5D	●	1.6	$0_{-0.010}$	5.7	6.5	4	50	Fig.1
2ZDK017HP-1.5D	●	1.7	$0_{-0.010}$	5.9	6.7	4	50	Fig.1
2ZDK018HP-1.5D	●	1.8	$0_{-0.010}$	6.1	6.9	4	50	Fig.1
2ZDK019HP-1.5D	●	1.9	$0_{-0.010}$	6.3	7.1	4	50	Fig.1
2ZDK020HP-1.5D	●	2.0	$0_{-0.010}$	6.5	7.3	4	50	Fig.1
2ZDK021HP-1.5D	●	2.1	$0_{-0.010}$	6.9	7.7	4	50	Fig.1
2ZDK022HP-1.5D	●	2.2	$0_{-0.010}$	7.3	8.1	4	50	Fig.1
2ZDK023HP-1.5D	●	2.3	$0_{-0.010}$	7.7	8.5	4	50	Fig.1
2ZDK024HP-1.5D	●	2.4	$0_{-0.010}$	8.1	8.9	4	50	Fig.1
2ZDK025HP-1.5D	●	2.5	$0_{-0.010}$	8.5	9.3	4	50	Fig.1
2ZDK026HP-1.5D	●	2.6	$0_{-0.010}$	8.8	9.5	4	50	Fig.1
2ZDK027HP-1.5D	●	2.7	$0_{-0.010}$	9.1	9.8	4	50	Fig.1
2ZDK028HP-1.5D	●	2.8	$0_{-0.010}$	9.3	10.0	4	50	Fig.1
2ZDK029HP-1.5D	●	2.9	$0_{-0.010}$	9.5	10.3	4	50	Fig.1
2ZDK030HP-1.5D	●	3.0	$0_{-0.010}$	9	10	6	60	Fig.1
2ZDK031HP-1.5D	●	3.1	$0_{-0.012}$	10	11	6	60	Fig.1
2ZDK032HP-1.5D	●	3.2						
2ZDK033HP-1.5D	●	3.3						
2ZDK034HP-1.5D	●	3.4	$0_{-0.012}$	11	12	6	60	Fig.1
2ZDK035HP-1.5D	●	3.5						
2ZDK036HP-1.5D	●	3.6						
2ZDK037HP-1.5D	●	3.7	$0_{-0.012}$	12	13	6	60	Fig.1
2ZDK038HP-1.5D	●	3.8						
2ZDK039HP-1.5D	●	3.9						
2ZDK040HP-1.5D	●	4.0	$0_{-0.012}$	13	14	6	60	Fig.1
2ZDK041HP-1.5D	●	4.1						
2ZDK042HP-1.5D	●	4.2						
2ZDK043HP-1.5D	●	4.3	$0_{-0.012}$	14	15	6	60	Fig.1
2ZDK044HP-1.5D	●	4.4						
2ZDK045HP-1.5D	●	4.5						
2ZDK046HP-1.5D	●	4.6	$0_{-0.012}$	15	16	6	60	Fig.1
2ZDK047HP-1.5D	●	4.7						
2ZDK048HP-1.5D	●	4.8						
2ZDK049HP-1.5D	●	4.9						

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK050HP-1.5D	●	5.0	$0_{-0.012}$	16	17	6	60	Fig.1
2ZDK051HP-1.5D	●	5.1						
2ZDK052HP-1.5D	●	5.2						
2ZDK053HP-1.5D	●	5.3	$0_{-0.012}$	17	18	6	60	Fig.1
2ZDK054HP-1.5D	●	5.4						
2ZDK055HP-1.5D	●	5.5						
2ZDK056HP-1.5D	●	5.6	$0_{-0.012}$	18	19	6	60	Fig.1
2ZDK057HP-1.5D	●	5.7						
2ZDK058HP-1.5D	●	5.8						
2ZDK059HP-1.5D	●	5.9	$0_{-0.012}$	19	21	6	60	Fig.1
2ZDK060HP-1.5D	●	6.0						
2ZDK061HP-1.5D	●	6.1						
2ZDK062HP-1.5D	●	6.2	$0_{-0.015}$	20	22	8	70	Fig.1
2ZDK063HP-1.5D	●	6.3						
2ZDK064HP-1.5D	●	6.4						
2ZDK065HP-1.5D	●	6.5	$0_{-0.015}$	21	23	8	70	Fig.1
2ZDK066HP-1.5D	●	6.6						
2ZDK067HP-1.5D	●	6.7						
2ZDK068HP-1.5D	●	6.8	$0_{-0.015}$	22	24	8	70	Fig.1
2ZDK069HP-1.5D	●	6.9						
2ZDK070HP-1.5D	●	7.0						
2ZDK071HP-1.5D	●	7.1	$0_{-0.015}$	23	25	8	70	Fig.1
2ZDK072HP-1.5D	●	7.2						
2ZDK073HP-1.5D	●	7.3						
2ZDK074HP-1.5D	●	7.4	$0_{-0.015}$	24	25	8	70	Fig.1
2ZDK075HP-1.5D	●	7.5						
2ZDK076HP-1.5D	●	7.6						
2ZDK077HP-1.5D	●	7.7	$0_{-0.015}$	25	27	8	70	Fig.1
2ZDK078HP-1.5D	●	7.8						
2ZDK079HP-1.5D	●	7.9						
2ZDK080HP-1.5D	●	8.0	$0_{-0.015}$	26	28	10	80	Fig.1
2ZDK081HP-1.5D	●	8.1						
2ZDK082HP-1.5D	●	8.2						
2ZDK083HP-1.5D	●	8.3	$0_{-0.015}$	27	29	10	80	Fig.1
2ZDK084HP-1.5D	●	8.4						
2ZDK085HP-1.5D	●	8.5						
2ZDK086HP-1.5D	●	8.6	$0_{-0.015}$	28	30	10	80	Fig.1
2ZDK087HP-1.5D	●	8.7						
2ZDK088HP-1.5D	●	8.8						

● : Standard Stock

The standard Drilling Depth is 1.5 D (1.5 x DC).

2ZDK-HP Stock Items Drilling Depth Short

Short

No. of flutes (Z) = 2 Helix Angle: 20°




Fig.1




Fig.2

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK089HP-1.5D	●	8.9	0 -0.015	28	30	10	80	Fig.1
2ZDK090HP-1.5D	●	9.0						
2ZDK091HP-1.5D	●	9.1						
2ZDK092HP-1.5D	●	9.2	0 -0.015	29	31	10	80	Fig.1
2ZDK093HP-1.5D	●	9.3						
2ZDK094HP-1.5D	●	9.4						
2ZDK095HP-1.5D	●	9.5	0 -0.015	30	32	10	80	Fig.1
2ZDK096HP-1.5D	●	9.6						
2ZDK097HP-1.5D	●	9.7						
2ZDK098HP-1.5D	●	9.8	0 -0.015	31	33	10	80	Fig.1
2ZDK099HP-1.5D	●	9.9						
2ZDK100HP-1.5D	●	10.0						
2ZDK101HP-1.5D	●	10.1	0 -0.018	31	33	12	100	Fig.1
2ZDK102HP-1.5D	●	10.2						
2ZDK103HP-1.5D	●	10.3						
2ZDK104HP-1.5D	●	10.4	0 -0.018	32	34	12	100	Fig.1
2ZDK105HP-1.5D	●	10.5						
2ZDK106HP-1.5D	●	10.6						
2ZDK107HP-1.5D	●	10.7	0 -0.018	33	35	12	100	Fig.1
2ZDK108HP-1.5D	●	10.8						
2ZDK109HP-1.5D	●	10.9						
2ZDK110HP-1.5D	●	11.0	0 -0.018	34	36	12	100	Fig.1
2ZDK111HP-1.5D	●	11.1						
2ZDK112HP-1.5D	●	11.2						
2ZDK113HP-1.5D	●	11.3	0 -0.018	35	37	12	100	Fig.1
2ZDK114HP-1.5D	●	11.4						

The standard Drilling Depth is 1.5 D (1.5 x DC).

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK115HP-1.5D	●	11.5	0 -0.018	36	38	12	100	Fig.1
2ZDK116HP-1.5D	●	11.6						
2ZDK117HP-1.5D	●	11.7						
2ZDK118HP-1.5D	●	11.8	0 -0.018	37	39	12	100	Fig.1
2ZDK119HP-1.5D	●	11.9						
2ZDK120HP-1.5D	●	12.0						
2ZDK125HP-1.5D	●	12.5	0 -0.018	41	41	12	100	Fig.2
2ZDK130HP-1.5D	●	13.0		43	43			
2ZDK135HP-1.5D	●	13.5		44	44			
2ZDK140HP-1.5D	●	14.0	0 -0.018	45	45	12	115	Fig.2
2ZDK145HP-1.5D	●	14.5		47	47			
2ZDK150HP-1.5D	●	15.0		48	48			
2ZDK155HP-1.5D	●	15.5	0 -0.018	50	50	16	115	Fig.1
2ZDK160HP-1.5D	●	16.0		52	52			
2ZDK165HP-1.5D	●	16.5		53	53			
2ZDK170HP-1.5D	●	17.0	0 -0.018	54	54	16	115	Fig.2
2ZDK175HP-1.5D	●	17.5		56	56			
2ZDK180HP-1.5D	●	18.0		57	57			
2ZDK185HP-1.5D	●	18.5	0 -0.021	59	59	16	125	Fig.2
2ZDK190HP-1.5D	●	19.0		60	60			
2ZDK195HP-1.5D	●	19.5		62	62			
2ZDK200HP-1.5D	●	20.0	0 -0.021	63	63	20	125	Fig.1

● : Standard Stock

Comparison with Standard Drill

	Bottom Shape	Burr	Drilling in Slant Surface
2ZDK-HP	 Almost even	 Minimizes Burrs	 Stable Machining (Lowered the Feed)
Standard Drill	 Same as Bottom Shape	 Burr Burr Build-up	 Unstable Machining

Short Long shank type

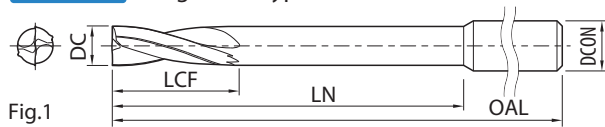


Fig.1

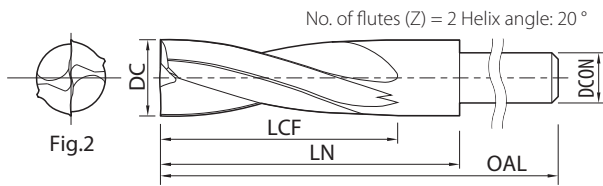


Fig.2

No. of flutes (Z) = 2 Helix angle: 20°

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK030HP-1.5D-LS	●	3.0	0 -0.010	9.0	30.0	6	100	Fig.1
2ZDK031HP-1.5D-LS	MTO	3.1		10.0	31.0			
2ZDK032HP-1.5D-LS	MTO	3.2			32.0			
2ZDK033HP-1.5D-LS	MTO	3.3			33.0			
2ZDK034HP-1.5D-LS	MTO	3.4			34.0			
2ZDK035HP-1.5D-LS	●	3.5		11.0	35.0			
2ZDK036HP-1.5D-LS	MTO	3.6			36.0			
2ZDK037HP-1.5D-LS	MTO	3.7		12.0	37.0			
2ZDK038HP-1.5D-LS	MTO	3.8			38.0			
2ZDK039HP-1.5D-LS	MTO	3.9			39.0			
2ZDK040HP-1.5D-LS	●	4.0			13.0			
2ZDK041HP-1.5D-LS	MTO	4.1		41.0				
2ZDK042HP-1.5D-LS	MTO	4.2		42.0				
2ZDK043HP-1.5D-LS	MTO	4.3		43.0				
2ZDK044HP-1.5D-LS	MTO	4.4		14.0	44.0			
2ZDK045HP-1.5D-LS	●	4.5			45.0			
2ZDK046HP-1.5D-LS	MTO	4.6			46.0			
2ZDK047HP-1.5D-LS	MTO	4.7			47.0			
2ZDK048HP-1.5D-LS	MTO	4.8		15.0	48.0			
2ZDK049HP-1.5D-LS	MTO	4.9	49.0					
2ZDK050HP-1.5D-LS	●	5.0	0 -0.012	16.0	50.0	6	110	Fig.1
2ZDK051HP-1.5D-LS	MTO	5.1			51.0			
2ZDK052HP-1.5D-LS	MTO	5.2			52.0			
2ZDK053HP-1.5D-LS	MTO	5.3			53.0			
2ZDK054HP-1.5D-LS	MTO	5.4		17.0	54.0			
2ZDK055HP-1.5D-LS	●	5.5			55.0			
2ZDK056HP-1.5D-LS	MTO	5.6			56.0			
2ZDK057HP-1.5D-LS	MTO	5.7		18.0	57.0			
2ZDK058HP-1.5D-LS	MTO	5.8			58.0			
2ZDK059HP-1.5D-LS	MTO	5.9			59.0			
2ZDK060HP-1.5D-LS	●	6.0	0 -0.012	19.0	60.0	6	120	Fig.1
2ZDK061HP-1.5D-LS	MTO	6.1	0 -0.015	19.0	29.0	6	120	Fig.2
2ZDK062HP-1.5D-LS	MTO	6.2		20.0	29.5			
2ZDK063HP-1.5D-LS	MTO	6.3						
2ZDK064HP-1.5D-LS	MTO	6.4						
2ZDK065HP-1.5D-LS	●	6.5						
2ZDK066HP-1.5D-LS	MTO	6.6		21.0	30.0			
2ZDK067HP-1.5D-LS	MTO	6.7						
2ZDK068HP-1.5D-LS	MTO	6.8						
2ZDK069HP-1.5D-LS	MTO	6.9						
2ZDK070HP-1.5D-LS	●	7.0		22.0	30.0			
2ZDK071HP-1.5D-LS	MTO	7.1			30.5			
2ZDK072HP-1.5D-LS	MTO	7.2						
2ZDK073HP-1.5D-LS	MTO	7.3						
2ZDK074HP-1.5D-LS	MTO	7.4		23.0	30.5			
2ZDK075HP-1.5D-LS	●	7.5						

Description	Stock	Dimension (mm)						Shape			
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL				
2ZDK076HP-1.5D-LS	MTO	7.6	0 -0.015	24.0	31.0	6	120	Fig.2			
2ZDK077HP-1.5D-LS	MTO	7.7									
2ZDK078HP-1.5D-LS	MTO	7.8									
2ZDK079HP-1.5D-LS	MTO	7.9	0 -0.015	25.0	80.0	8	130	Fig.1			
2ZDK080HP-1.5D-LS	●	8.0									
2ZDK081HP-1.5D-LS	MTO	8.1									
2ZDK082HP-1.5D-LS	MTO	8.2			31.5			Fig.2			
2ZDK083HP-1.5D-LS	MTO	8.3									
2ZDK084HP-1.5D-LS	MTO	8.4									
2ZDK085HP-1.5D-LS	●	8.5	26.0	32.0							
2ZDK086HP-1.5D-LS	MTO	8.6									
2ZDK087HP-1.5D-LS	MTO	8.7									
2ZDK088HP-1.5D-LS	MTO	8.8	0 -0.015	27.0	32.0	8	130	Fig.2			
2ZDK089HP-1.5D-LS	MTO	8.9									
2ZDK090HP-1.5D-LS	●	9.0									
2ZDK091HP-1.5D-LS	MTO	9.1	28.0	32.5							
2ZDK092HP-1.5D-LS	MTO	9.2									
2ZDK093HP-1.5D-LS	MTO	9.3									
2ZDK094HP-1.5D-LS	MTO	9.4	0 -0.015	29.0	32.5	8	130	Fig.2			
2ZDK095HP-1.5D-LS	●	9.5									
2ZDK096HP-1.5D-LS	MTO	9.6									
2ZDK097HP-1.5D-LS	MTO	9.7	0 -0.015	30.0	33.5				8	130	Fig.2
2ZDK098HP-1.5D-LS	MTO	9.8									
2ZDK099HP-1.5D-LS	MTO	9.9									
2ZDK100HP-1.5D-LS	●	10.0	0 -0.015	31.0	100.0	10	150	Fig.1			
2ZDK101HP-1.5D-LS	MTO	10.1									
2ZDK102HP-1.5D-LS	MTO	10.2									
2ZDK103HP-1.5D-LS	MTO	10.3	0 -0.018	32.0	36.0				10	150	Fig.2
2ZDK104HP-1.5D-LS	MTO	10.4									
2ZDK105HP-1.5D-LS	●	10.5									
2ZDK106HP-1.5D-LS	MTO	10.6	33.0	36.5							
2ZDK107HP-1.5D-LS	MTO	10.7									
2ZDK108HP-1.5D-LS	MTO	10.8									
2ZDK109HP-1.5D-LS	MTO	10.9	0 -0.018	34.0	37.5	10	150	Fig.2			
2ZDK110HP-1.5D-LS	●	11.0									
2ZDK111HP-1.5D-LS	MTO	11.1									
2ZDK112HP-1.5D-LS	MTO	11.2		35.0	38.5						
2ZDK113HP-1.5D-LS	MTO	11.3									
2ZDK114HP-1.5D-LS	MTO	11.4	0 -0.018	36.0	39.5				10	150	Fig.2
2ZDK115HP-1.5D-LS	●	11.5									
2ZDK116HP-1.5D-LS	MTO	11.6									
2ZDK117HP-1.5D-LS	MTO	11.7									
2ZDK118HP-1.5D-LS	MTO	11.8									
2ZDK119HP-1.5D-LS	MTO	11.9									
2ZDK120HP-1.5D-LS	●	12.0	0 -0.018	37.0	120.0	12	170	Fig.1			

● : Standard Stock MTO : Made to order

The standard drilling depth is $1.5 D$ ($1.5 \times DC$).

Regular

No. of flutes (Z) = 2 Helix angle: 20°




Fig.1

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK030HP-3D	●	3.0	⁰ -0.010	14	15	6	60	Fig.1
2ZDK031HP-3D	●	3.1	⁰ -0.012	14	15	6	60	Fig.1
2ZDK032HP-3D	●	3.2						
2ZDK033HP-3D	●	3.3	⁰ -0.012	15	16	6	60	Fig.1
2ZDK034HP-3D	●	3.4						
2ZDK035HP-3D	●	3.5	⁰ -0.012	17	18	6	60	Fig.1
2ZDK036HP-3D	●	3.6						
2ZDK037HP-3D	●	3.7						
2ZDK038HP-3D	●	3.8						
2ZDK039HP-3D	●	3.9						
2ZDK040HP-3D	●	4.0	⁰ -0.012	19	20	6	60	Fig.1
2ZDK041HP-3D	●	4.1						
2ZDK042HP-3D	●	4.2	⁰ -0.012	20	21	6	60	Fig.1
2ZDK043HP-3D	●	4.3						
2ZDK044HP-3D	●	4.4						
2ZDK045HP-3D	●	4.5	⁰ -0.012	21	22	6	60	Fig.1
2ZDK046HP-3D	●	4.6						
2ZDK047HP-3D	●	4.7						
2ZDK048HP-3D	●	4.8						
2ZDK049HP-3D	●	4.9						
2ZDK050HP-3D	●	5.0	⁰ -0.012	23	24	6	60	Fig.
2ZDK051HP-3D	●	5.1						
2ZDK052HP-3D	●	5.2						
2ZDK053HP-3D	●	5.3	⁰ -0.012	24	25	6	60	Fig.1
2ZDK054HP-3D	●	5.4						
2ZDK055HP-3D	●	5.5	⁰ -0.012	25	26	6	60	Fig.1
2ZDK056HP-3D	●	5.6	⁰ -0.012	26	27	6	60	Fig.1
2ZDK057HP-3D	●	5.7						
2ZDK058HP-3D	●	5.8						
2ZDK059HP-3D	●	5.9						
2ZDK060HP-3D	●	6.0	⁰ -0.012	28	(28)	6	60	Fig.1
2ZDK061HP-3D	●	6.1	⁰ -0.015	28	29	8	70	Fig.1
2ZDK062HP-3D	●	6.2						
2ZDK063HP-3D	●	6.3						
2ZDK064HP-3D	●	6.4						
2ZDK065HP-3D	●	6.5	⁰ -0.015	30	31	8	70	Fig.1
2ZDK066HP-3D	●	6.6						
2ZDK067HP-3D	●	6.7						
2ZDK068HP-3D	●	6.8	⁰ -0.015	31	32	8	70	Fig.1
2ZDK069HP-3D	●	6.9						
2ZDK070HP-3D	●	7.0	⁰ -0.015	32	33	8	70	Fig.1
2ZDK071HP-3D	●	7.1						
2ZDK072HP-3D	●	7.2						
2ZDK073HP-3D	●	7.3						
2ZDK074HP-3D	●	7.4						
2ZDK075HP-3D	●	7.5	⁰ -0.015	34	35	8	70	Fig.1


Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK076HP-3D	●	7.6	0 -0.015	34	35	8	70	Fig.1
2ZDK077HP-3D	●	7.7						
2ZDK078HP-3D	●	7.8						
2ZDK079HP-3D	●	7.9	0 -0.015	36	(36)	8	70	Fig.1
2ZDK080HP-3D	●	8.0						
2ZDK081HP-3D	●	8.1						
2ZDK082HP-3D	●	8.2						
2ZDK083HP-3D	●	8.3						
2ZDK084HP-3D	●	8.4	0 -0.015	36	37	10	80	Fig.1
2ZDK085HP-3D	●	8.5						
2ZDK086HP-3D	●	8.6						
2ZDK087HP-3D	●	8.7	0 -0.015	38	39	10	80	Fig.1
2ZDK088HP-3D	●	8.8						
2ZDK089HP-3D	●	8.9						
2ZDK090HP-3D	●	9.0	0 -0.015	39	40	10	80	Fig.1
2ZDK091HP-3D	●	9.1						
2ZDK092HP-3D	●	9.2						
2ZDK093HP-3D	●	9.3	0 -0.015	40	41	10	80	Fig.1
2ZDK094HP-3D	●	9.4						
2ZDK095HP-3D	●	9.5						
2ZDK096HP-3D	●	9.6						
2ZDK097HP-3D	●	9.7						
2ZDK098HP-3D	●	9.8	0 -0.015	42	43	10	80	Fig.1
2ZDK099HP-3D	●	9.9						
2ZDK100HP-3D	●	10.0						
2ZDK101HP-3D	●	10.1	0 -0.018	45	46	12	100	Fig.1
2ZDK102HP-3D	●	10.2						
2ZDK103HP-3D	●	10.3						
2ZDK104HP-3D	●	10.4	0 -0.018	46	47	12	100	Fig.1
2ZDK105HP-3D	●	10.5						
2ZDK106HP-3D	●	10.6						
2ZDK107HP-3D	●	10.7	0 -0.018	47	48	12	100	Fig.1
2ZDK108HP-3D	●	10.8						
2ZDK109HP-3D	●	10.9						
2ZDK110HP-3D	●	11.0	0 -0.018	51	52	12	100	Fig.1
2ZDK111HP-3D	●	11.1						
2ZDK112HP-3D	●	11.2						
2ZDK113HP-3D	●	11.3						
2ZDK114HP-3D	●	11.4						
2ZDK115HP-3D	●	11.5	0 -0.018	53	54	12	100	Fig.1
2ZDK116HP-3D	●	11.6						
2ZDK117HP-3D	●	11.7						
2ZDK118HP-3D	●	11.8						
2ZDK119HP-3D	●	11.9						
2ZDK120HP-3D	●	12.0	0 -0.018	54	(54)	12	100	Fig.1

● : Standard Stock

The standard drilling depth is $3.0 D$ ($3.0 \times DC$).

Regular

No. of flutes (Z) = 2 Helix angle: about 30°

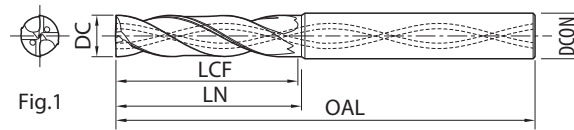

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK030HP-3D-OH	●	3.0	0 -0.010	13.5	15.5	3	68	Fig.1
2ZDK031HP-3D-OH	●	3.1	0 -0.012	14	16	4	72	Fig.1
2ZDK032HP-3D-OH	●	3.2		14.4	16.4			
2ZDK033HP-3D-OH	●	3.3		14.9	16.9			
2ZDK034HP-3D-OH	●	3.4		15.3	17.3			
2ZDK035HP-3D-OH	●	3.5		15.8	17.8			
2ZDK036HP-3D-OH	●	3.6		16.2	18.2			
2ZDK037HP-3D-OH	●	3.7		16.7	18.7			
2ZDK038HP-3D-OH	●	3.8		17.1	19.1			
2ZDK039HP-3D-OH	●	3.9		17.6	19.6			
2ZDK040HP-3D-OH	●	4.0	0 -0.012	18	20	4	72	Fig.1
2ZDK041HP-3D-OH	●	4.1	0 -0.012	18.5	20.5	5	80	Fig.1
2ZDK042HP-3D-OH	●	4.2		18.9	20.9			
2ZDK043HP-3D-OH	●	4.3		19.4	21.4			
2ZDK044HP-3D-OH	●	4.4		19.8	21.8			
2ZDK045HP-3D-OH	●	4.5		20.3	22.3			
2ZDK046HP-3D-OH	●	4.6		20.7	22.7			
2ZDK047HP-3D-OH	●	4.7		21.2	23.2			
2ZDK048HP-3D-OH	●	4.8		21.6	23.6			
2ZDK049HP-3D-OH	●	4.9		22.1	24.1			
2ZDK050HP-3D-OH	●	5.0	0 -0.012	22.5	24.5	5	80	Fig.1
2ZDK051HP-3D-OH	●	5.1	0 -0.012	23	25	6	82	Fig.1
2ZDK052HP-3D-OH	●	5.2		23.4	25.4			
2ZDK053HP-3D-OH	●	5.3		23.9	25.9			
2ZDK054HP-3D-OH	●	5.4		24.3	26.3			
2ZDK055HP-3D-OH	●	5.5		24.8	26.8			
2ZDK056HP-3D-OH	●	5.6		25.2	27.2			
2ZDK057HP-3D-OH	●	5.7		25.7	27.7			
2ZDK058HP-3D-OH	●	5.8		26.1	28.1			
2ZDK059HP-3D-OH	●	5.9		26.6	28.6			
2ZDK060HP-3D-OH	●	6.0	0 -0.012	27	29	6	82	Fig.1
2ZDK061HP-3D-OH	●	6.1	0 -0.015	27.5	29.5	7	88	Fig.1
2ZDK062HP-3D-OH	●	6.2		27.9	29.9			
2ZDK063HP-3D-OH	●	6.3		28.4	30.4			
2ZDK064HP-3D-OH	●	6.4		28.8	30.8			
2ZDK065HP-3D-OH	●	6.5		29.3	31.3			
2ZDK066HP-3D-OH	●	6.6		29.7	31.7			
2ZDK067HP-3D-OH	●	6.7		30.2	32.2			
2ZDK068HP-3D-OH	●	6.8		30.6	32.6			
2ZDK069HP-3D-OH	●	6.9		31.1	33.1			
2ZDK070HP-3D-OH	●	7.0	0 -0.015	31.5	33.5	7	88	Fig.1
2ZDK071HP-3D-OH	●	7.1	0 -0.015	32	34	8	94	Fig.1
2ZDK072HP-3D-OH	●	7.2		32.4	34.4			
2ZDK073HP-3D-OH	●	7.3		32.9	34.9			
2ZDK074HP-3D-OH	●	7.4		33.3	35.3			
2ZDK075HP-3D-OH	●	7.5		33.8	35.8			

Description	Stock	Dimension (mm)						Shape
		DC	Outside Dia. Tolerance	LCF	LN	DCON	OAL	
2ZDK076HP-3D-OH	●	7.6	0 -0.015	34.2	36.2	8	94	Fig.1
2ZDK077HP-3D-OH	●	7.7		34.7	36.7			
2ZDK078HP-3D-OH	●	7.8		35.1	37.1			
2ZDK079HP-3D-OH	●	7.9		35.6	37.6			
2ZDK080HP-3D-OH	●	8.0	0 -0.015	36	38	8	94	Fig.1
2ZDK081HP-3D-OH	●	8.1	0 -0.015	36.5	38.5	9	100	Fig.1
2ZDK082HP-3D-OH	●	8.2		36.9	38.9			
2ZDK083HP-3D-OH	●	8.3		37.4	39.4			
2ZDK084HP-3D-OH	●	8.4		37.8	39.8			
2ZDK085HP-3D-OH	●	8.5		38.3	40.3			
2ZDK086HP-3D-OH	●	8.6		38.7	40.7			
2ZDK087HP-3D-OH	●	8.7		39.2	41.2			
2ZDK088HP-3D-OH	●	8.8		39.6	41.6			
2ZDK089HP-3D-OH	●	8.9		40.1	42.1			
2ZDK090HP-3D-OH	●	9.0	0 -0.015	40.5	42.5	9	100	Fig.1
2ZDK091HP-3D-OH	●	9.1	0 -0.015	41	43	10	106	Fig.1
2ZDK092HP-3D-OH	●	9.2		41.4	43.4			
2ZDK093HP-3D-OH	●	9.3		41.9	43.9			
2ZDK094HP-3D-OH	●	9.4		42.3	44.3			
2ZDK095HP-3D-OH	●	9.5		42.8	44.8			
2ZDK096HP-3D-OH	●	9.6		43.2	45.2			
2ZDK097HP-3D-OH	●	9.7		43.7	45.7			
2ZDK098HP-3D-OH	●	9.8		44.1	46.1			
2ZDK099HP-3D-OH	●	9.9		44.6	46.6			
2ZDK100HP-3D-OH	●	10.0	0 -0.015	45	47	10	106	Fig.1
2ZDK101HP-3D-OH	●	10.1	0 -0.018	45.5	47.5	11	116	Fig.1
2ZDK102HP-3D-OH	●	10.2		45.9	47.9			
2ZDK103HP-3D-OH	●	10.3		46.4	48.4			
2ZDK104HP-3D-OH	●	10.4		46.8	48.8			
2ZDK105HP-3D-OH	●	10.5		47.3	49.3			
2ZDK106HP-3D-OH	●	10.6		47.7	49.7			
2ZDK107HP-3D-OH	●	10.7		48.2	50.2			
2ZDK108HP-3D-OH	●	10.8		48.6	50.6			
2ZDK109HP-3D-OH	●	10.9		49.1	51.1			
2ZDK110HP-3D-OH	●	11.0	0 -0.018	49.5	51.5	11	116	Fig.1
2ZDK111HP-3D-OH	●	11.1	0 -0.018	50	52	12	122	Fig.1
2ZDK112HP-3D-OH	●	11.2		50.4	52.4			
2ZDK113HP-3D-OH	●	11.3		50.9	52.9			
2ZDK114HP-3D-OH	●	11.4		51.3	53.3			
2ZDK115HP-3D-OH	●	11.5		51.8	53.8			
2ZDK116HP-3D-OH	●	11.6		52.2	54.2			
2ZDK117HP-3D-OH	●	11.7		52.7	54.7			
2ZDK118HP-3D-OH	●	11.8		53.1	55.1			
2ZDK119HP-3D-OH	●	11.9		53.6	55.6			
2ZDK120HP-3D-OH	●	12.0	0 -0.018	54	56	12	122	Fig.1

● : Standard Stock

The standard drilling depth is 3.0 D (3.0 x DC).

Recommended Cutting Conditions

2ZDK-HP **Short** **Regular**

Drilling Depth Short: ap ≤ 1.5 DC Regular: ap ≤ 2DC

Workpiece	Outside Diameter DC (mm)	1	1.5	2	2.5	3	3.5	4	4.5	5	6	8	10	12	14	16	18	20
Structural Steel, Carbon Steel S5400, S45C	Spindle Revolution (min ⁻¹)	20,700	13,800	11,150	9,200	9,100	7,800	6,800	6,100	5,500	4,600	3,500	2,800	2,300	1,800	1,600	1,400	1,300
	Feed Rate (mm/min)	350	350	430	430	520	520	520	520	520	520	520	520	520	480	480	480	480
Alloy Steel SCM, SNCM	Spindle Revolution (min ⁻¹)	17,500	11,700	9,600	7,650	7,200	6,200	5,400	4,800	4,400	3,600	2,700	2,200	1,800	1,500	1,350	1,200	1,100
	Feed Rate (mm/min)	290	290	380	380	450	450	450	450	450	450	450	450	450	420	420	420	420
Pre-hardened Steel (30~45HRC)	Spindle Revolution (min ⁻¹)	9,600	6,400	5,570	4,460	3,900	3,400	2,900	2,600	2,300	1,900	1,500	1,200	1,000	850	750	650	600
	Feed Rate (mm/min)	120	120	170	170	210	210	210	210	210	210	210	210	210	200	200	200	200
Nodular Cast Iron FCD400	Spindle Revolution (min ⁻¹)	15,900	10,600	10,360	8,290	7,200	6,200	5,400	4,800	4,400	3,600	2,700	2,200	1,800	1,550	1,350	1,200	1,100
	Feed Rate (mm/min)	220	250	390	390	390	390	390	390	390	390	390	390	390	360	360	360	360
Aluminum Alloy A7075	Spindle Revolution (min ⁻¹)	39,800	26,600	23,000	18,500	17,800	15,200	13,100	11,800	10,500	8,900	6,700	5,400	4,500	3,800	3,400	3,000	2,700
	Feed Rate (mm/min)	900	1,000	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270	1,270
Aluminum Alloy Casting AC, ADC	Spindle Revolution (min ⁻¹)	29,000	19,200	17,500	14,000	13,100	11,500	10,000	8,800	8,000	6,700	5,000	4,000	3,400	2,900	2,500	2,200	2,000
	Feed Rate (mm/min)	550	550	820	820	820	820	820	820	820	820	820	820	820	820	820	820	820

2ZDK-HP **Short** Long Shank Type

Drilling Depth: ap ≤ 1DC

Workpiece	Outside Diameter DC (mm)	3	3.5	4	4.5	5	6	8	10	12
Structural Steel Carbon Steel S5400, S45C	Spindle Revolution (min ⁻¹)	10,600	9,100	8,000	7,100	6,400	5,300	4,000	3,200	2,700
	Feed Rate (mm/min)	830	830	830	830	830	830	830	830	830
Alloy Steel SCM, SNCM	Spindle Revolution (min ⁻¹)	9,500	8,200	7,200	6,400	5,700	4,800	3,600	2,900	2,400
	Feed Rate (mm/min)	630	630	630	630	630	630	630	630	630
Pre-hardened Steel (30~45HRC)	Spindle Revolution (min ⁻¹)	7,400	6,400	5,600	5,000	4,500	3,700	2,800	2,200	1,900
	Feed Rate (mm/min)	365	365	365	365	365	365	365	365	365
Nodular Cast Iron FCD400	Spindle Revolution (min ⁻¹)	9,600	8,200	7,200	6,400	5,700	4,800	3,600	2,900	2,400
	Feed Rate (mm/min)	475	475	475	475	475	475	475	475	475
Aluminum Alloy A7075	Spindle Revolution (min ⁻¹)	12,700	10,900	9,600	8,500	7,600	6,400	4,800	3,800	3,200
	Feed Rate (mm/min)	1,050	1,050	1,050	1,050	1,050	1,050	1,050	1,050	1,050
Aluminum Alloy Casting AC, ADC	Spindle Revolution (min ⁻¹)	9,500	8,200	7,200	6,400	5,700	4,800	3,600	2,900	2,400
	Feed Rate (mm/min)	675	675	675	675	675	675	675	675	675

2ZDK-HP-OH **Regular**

Drilling Depth: ap ≤ 3DC

Workpiece	Outside Diameter DC (mm)	3	4	5	6	8	10	12
Structural Steel Carbon Steel S5400, S45C	Spindle Revolution (min ⁻¹)	10,600	7,950	6,350	5,300	3,980	3,180	2,650
	Feed Rate (mm/min)	750	750	750	750	750	750	750
Alloy Steel SCM, SNCM	Spindle Revolution (min ⁻¹)	9,550	7,160	5,730	4,770	3,580	2,860	2,390
	Feed Rate (mm/min)	700	680	630	600	600	600	600
Pre-hardened Steel (30~45HRC)	Spindle Revolution (min ⁻¹)	5,300	3,980	3,180	2,650	1,990	1,590	1,330
	Feed Rate (mm/min)	300	300	300	300	300	280	280
Stainless Steel SUS304	Spindle Revolution (min ⁻¹)	7,430	5,570	5,100	4,240	3,180	2,550	2,120
	Feed Rate (mm/min)	400	400	400	500	500	500	500
Nodular Cast Iron FCD400	Spindle Revolution (min ⁻¹)	9,550	7,160	5,730	4,770	3,580	2,860	2,390
	Feed Rate (mm/min)	580	580	500	500	500	450	450
Aluminum Alloy A7075	Spindle Revolution (min ⁻¹)	18,000	13,500	10,800	9,000	6,800	5,400	4,500
	Feed Rate (mm/min)	1,270	1,270	1,270	1,270	1,270	1,270	1,270
Aluminum Alloy Casting AC, ADC	Spindle Revolution (min ⁻¹)	13,100	10,000	8,000	6,700	5,000	4,000	3,400
	Feed Rate (mm/min)	900	900	850	850	850	850	850

Precautions

- **This tool is specially designed for plunging and NOT recommended for traversing**
- Coolant is recommended
- Adjust ap to suit machine rigidity and overhang length
- Use chuck and machine with the highest rigidity possible
- Pecking is recommended when Drilling Depth is 2D or over
- Cutting condition modifications may be needed when cutting a slant surface, depending on the slant angle (Right Figure)
When workpiece slant is 30° or less, reduce the feed rate by 50%
When workpiece slant is 30° or more, reduce the revolution by 70% and the feed rate by 30%

2ZDK-HP-OH

- Internal coolant is recommended
- If there is insufficient chip evacuation at the specified drill depth, it is recommended to peck or change cutting conditions
- Pre-drilling is recommended if cutting is unstable
- Pre-drilling and pecking are recommended for stainless steel machining
- Pecking is recommended when drilling depth is 2D or over

