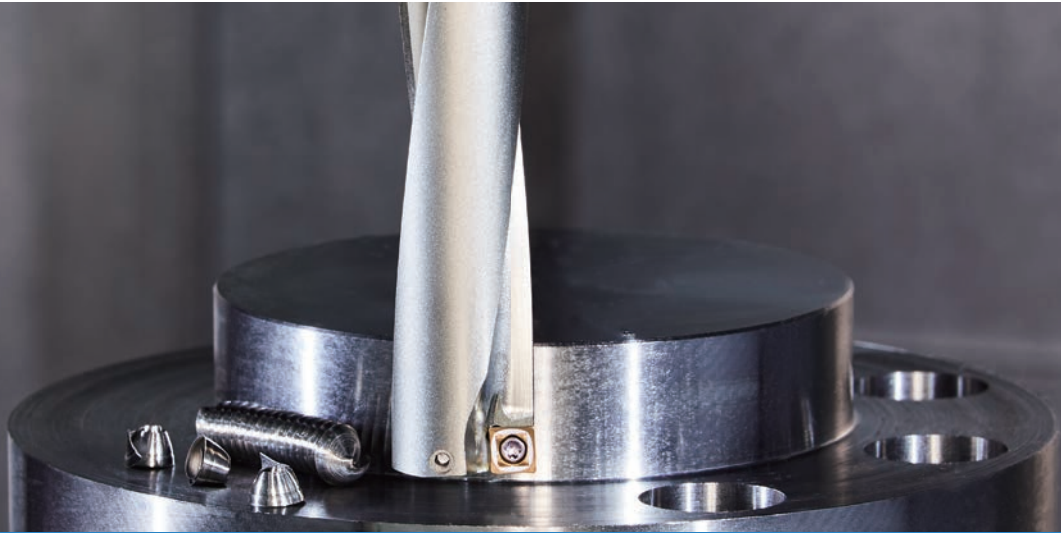


High Efficiency Indexable Insert Drill

**MagicDrill** **DRV**

Economical Inserts with 4 Cutting Edges. Excellent Chip Evacuation with 6D Maximum Deep-Hole Drilling

2D to 6D Drilling Lineup and 4 Types of Chipbreakers for Various Machining Applications

High Speed and Highly Efficient Machining Available with the Combination of a CVD Outer Insert and PVD Inner Insert

Highly Rigid Design with Chattering Resistance. Excellent Hole Accuracy

DRV Chamfering Attachment

**NEW****Inserts and Toolholders Lineup Expansion**

Expanded Large Toolholder Lineup from  $\phi 40\text{mm}$ ~ $\phi 60\text{mm}$  diameter

High Efficiency Indexable Insert Drill

# MagicDrill DRV


Economical Inserts with 4 Cutting Edges. Excellent Chip Evacuation with 6D Maximum Deep-Hole Drilling

High Speed and Highly Efficient Machining Available with the Combination of CVD (Outer Edge) and PVD (Inner Edge) Inserts


## 1 Excellent Drilling Precision with Less Variation in Cutting Diameter Up to 6D Drilling Capabilities with a Low Cutting Force Design

Optimal Web Thickness Reduces Chattering with a Low Cutting Force Design

Web Thickness Comparison  
(In-house Evaluation)

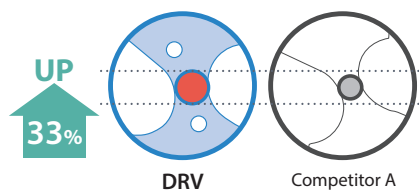


Comparison of Cutting Diameter Variation  
(In-house Evaluation)

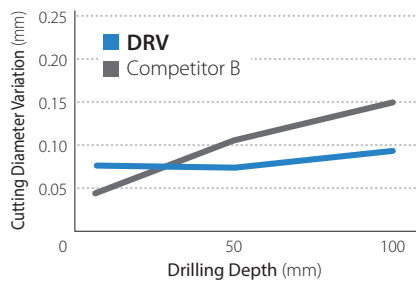

Cutting Conditions :  $V_c = 150$  m/min,  $f = 0.06$  mm/rev  
Cutting Dia.  $\phi 20(5D)$ , Wet Workpiece : S50C

Cutting Force Comparison  
(In-house Evaluation)

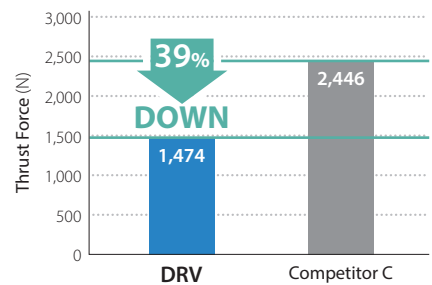


Cutting Conditions :  $V_c = 200$  m/min,  $f = 0.12$  mm/rev  
Cutting Dia.  $\phi 20(3D)$ , Wet Workpiece : S50C


## 2 Unique Insert Design to Control Chip Flow

Outer Edge Smooth Chip Evacuation with Compact Chips

Unique Insert Pattern to Differentiate between Outside and Inside Inserts

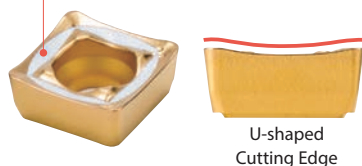

Chip Shape Comparison of Outer Insert Cutting Edge  
(In-house Evaluation)



DOWN 16%  
Diameter of Chips

Cutting Conditions :  $V_c = 150$  m/min,  $f = 0.06$  mm/rev, Cutting Dia.  $\phi 20(3D)$ , Wet Workpiece : S50C

Inner Edge Excellent Chip Evacuation with 6D Maximum Deep-Hole Drilling

Weight per Unit of Length for Chips Generated by the Inner Edge (In-house Evaluation)




DRV  
80mg/mm

Competitor E  
151mg/mm




Pitch Comparison of Chips Generated by the Inner Edge (In-house Evaluation)



DOWN 47%  
Weight of Chips


Cutting Conditions :  $V_c = 250$  m/min,  $f = 0.08$  mm/rev, Cutting Dia.  $\phi 20(5D)$ , Wet Workpiece : SUS304

### 3 CVD Insert on the Outer Edge for Highly Efficient Machining

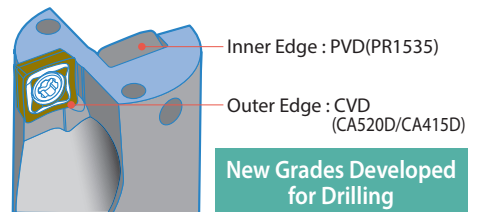


High Speed and Highly Efficient Machining Available with the Combination of CVD (Outer Edge) and PVD (Inner Edge) Inserts

Recommended Cutting Conditions (Maximum Value)

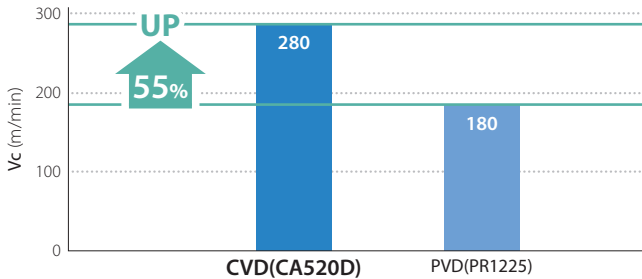

Cutting Dia.  $\phi$ 20(3D) Workpiece: S50C


Wear Resistance Comparison (In-house Evaluation)

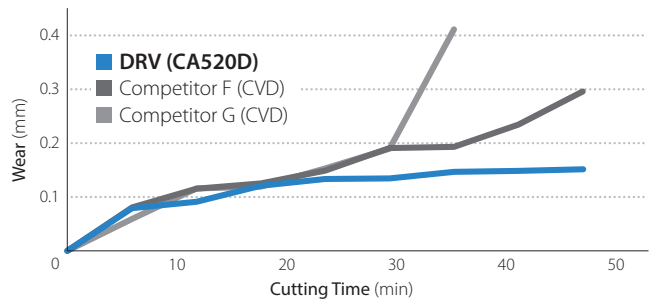


Cutting Conditions:  $V_c = 200$  m/min,  $f = 0.12$  mm/rev, Cutting Dia.  $\phi$ 20(3D), Wet Workpiece: SCM440H

### 4 Economical 4-edge Inserts 4 Types of Chipbreakers for Various Machining Applications


#### General Purpose GM Chipbreaker

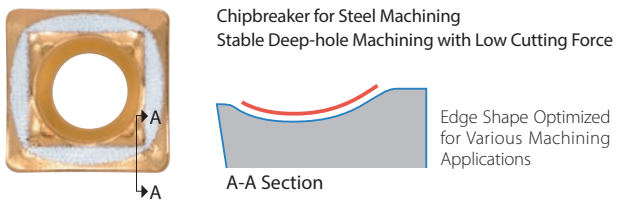


#### Tough Edge GH Chipbreaker

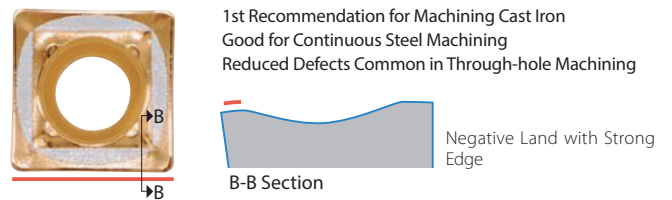

#### For Stainless Steel Machining SM Chipbreaker

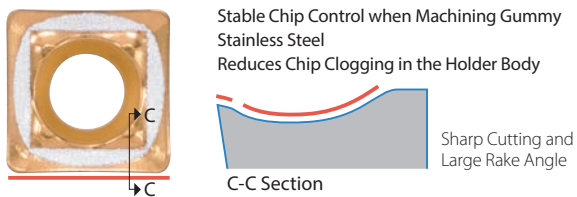


#### Chip Control Comparison (In-house Evaluation)

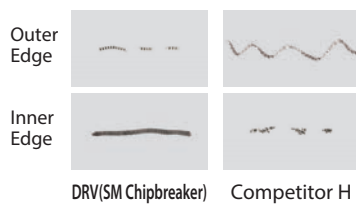


Cutting Conditions:  $V_c = 100$  m/min,  $f = 0.1$  mm/rev  
Cutting Dia.  $\phi$ 20(3D), Drilling Depth 60 mm  
Wet Workpiece: SUS304

#### Comparison of Remaining Chips (In-house Evaluation)




Cutting Conditions:  $V_c = 150$  m/min,  $f = 0.08$  mm/rev  
Cutting Dia.  $\phi$ 25(5D), Drilling Depth 98 mm  
Wet Workpiece: SUS304

#### For Machining Soft Steel and SS Material XM Chipbreaker

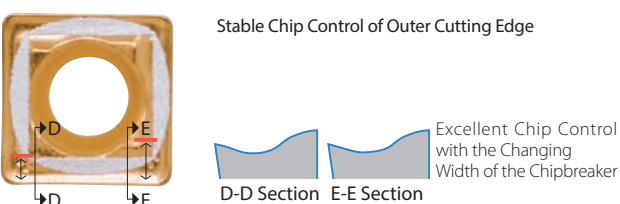

#### Chip Control Comparison (In-house Evaluation)

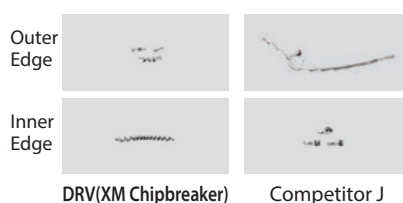

Cutting Conditions:  $V_c = 200$  m/min,  $f = 0.12$  mm/rev  
Cutting Dia.  $\phi$ 16(3D), Drilling Depth 48 mm  
Wet Workpiece: SS400

Chipbreaker Selection Chart  $\rightarrow$  P.3

# 5

## Applicable to a Wide Range of Machining Applications

**NEW**

Greatly enhanced large diameter toolholders

Full toolholder lineup available

Length from 2D to 6D, diameter from  $\phi$ 12mm to  $\phi$ 60mm



Chamfering Attachment




Expanded large holder lineup from  $\phi$ 40mm~ $\phi$ 60mm diameter  
(Picture at right : S40-DRV550M-3-17)



Wide lineup of toolholder from 2D to 6D


## Chipbreaker Selection Chart

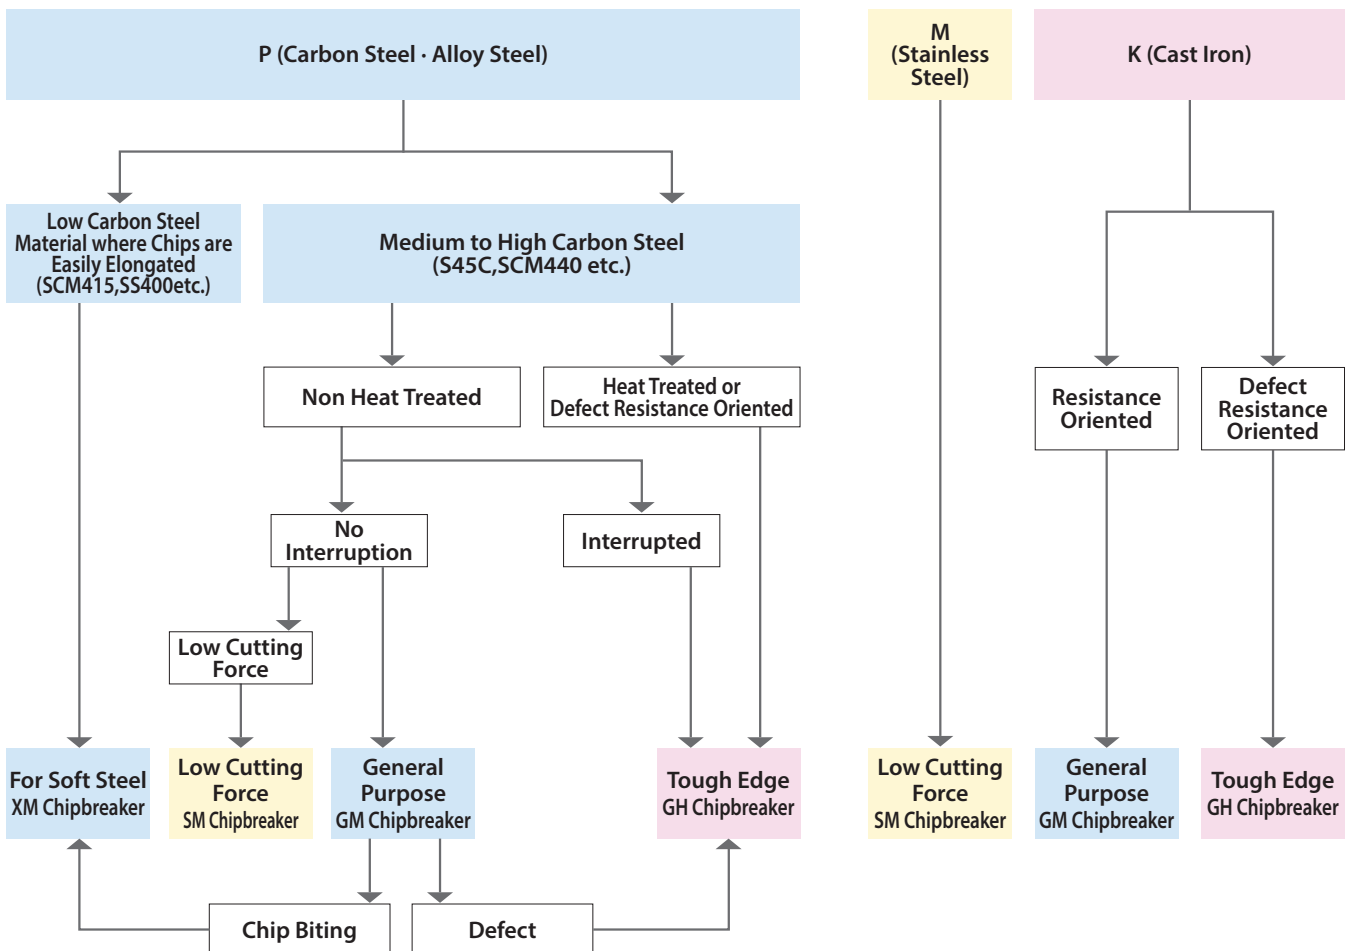

Case Studies

**Housing SCM420**

Vc = 125 m/min (n = 1,660 min<sup>-1</sup>)  
 f = 0.08 mm/rev (Vf = 133 mm/min)  
 Drilling Depth 45 mm  
 Wet (External Coolant)  
 S25-DRV240M-4-07  
 SCMT070305GM-E PR1225  
 SCMT070310GM-I PR1535



Cutting Time

**DRV (ø24-4D) 16 sec**

50%  
or More  
Cutting Time


Competitor K (ø24-4D) **35 sec**

Chattering and chip biting occurred in low rigidity workpiece of Competitor K. Speed was reduced to Vc = 60 m/min. DRV finely divided chips for stable machining at Vc = 125 m/min.

(User evaluation)

**Nipple S20CF**

Vc = 230 m/min (n = 3,330 min<sup>-1</sup>)  
 f = 0.13 mm/rev (Vf = 433 mm/min)  
 Drilling Depth 60 mm(4D)  
 30 mm(2D)  
 Wet (Internal Coolant)  
 S25-DRV220M-4-06 (4D)  
 S25-DRV220M-2-06 (2D)  
 SCMT060205-GM-E PR1225  
 SCMT060210-GM-I PR1535



Process2  
Drilling Depth 30 mm (2D)

Process1  
Drilling Depth 60 mm (4D)

Cutting Time

**DRV (ø24-4D/2D) 12 sec**

40%  
Cutting Time


Competitor L (ø22-4D/2D) **20 sec**

Chattering and deflection occurred with Competitor L. DRV showed stable machining and a shorter cutting time even when the cutting conditions were increased to 1.6 times or more.

(User evaluation)

**Valve Body SS400**

Vc = 220 mm/min (n = 3,200 min<sup>-1</sup>)  
 f = 0.05 mm/rev (Vf = 160 mm/min)  
 Cutting Depths : 50mm (Blind hole/Through-hole)  
 Wet (Internal Coolant)  
 S25-DRV220M-5-06  
 SCMT060205-GM-E PR1225  
 SCMT060210-GM-I PR1535



Cutting Time

**DRV (ø22-5D) 14 sec**

30%  
or More  
Cutting Time

Competitor M (ø22-5D) **22 sec**


Competitor M : Chattering occurred in the continuous part and then vibration was bigger in the crossed-hole.

DRV : There was no chattering even when increasing cutting speed and there was low vibration in the crossed-hole. The DRV achieved 1.5 times machining efficiency.

(User evaluation)

**Piston SCM440**

Vc = 250 mm/min (n = 3,185 min<sup>-1</sup>)  
 f = 0.09 mm/rev (Vf = 290 mm/min)  
 Cutting Depths : 70 mm (Blind hole)  
 Wet (Internal Coolant)  
 S25-DRV250M-4-07  
 SCMT070305-GM-E CA520D  
 SCMT070310-GM-I PR1535



Cutting Time

**DRV (ø25-4D) 14 sec**

25%  
Cutting Time


Competitor N (ø25-4D) **19 sec**

Competitor N : Loud chattering noise occurred.

DRV : Maintained stable machining. No chattering even at 1.5 times faster cutting speed.

(User evaluation)

# DRV Holder

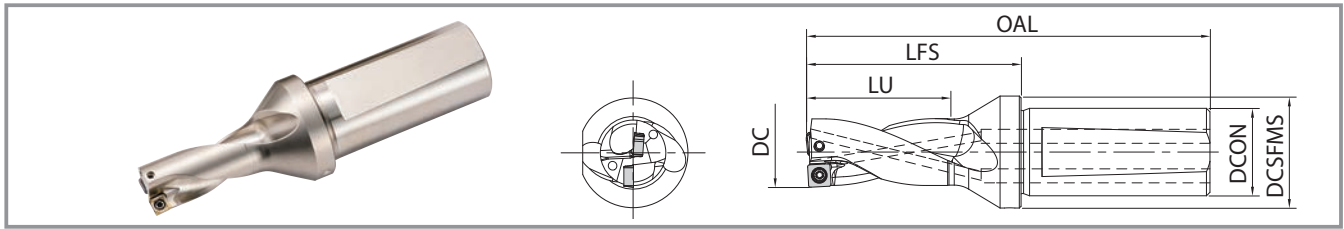

## Toolholder Dimensions

2D

(Drilling Depth : 2 X DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |     |     |    |      |        | Max. Radial Offset (mm) | Spare Parts |         | Applicable Inserts                                       |
|-------------------|-------|----------------|-----------------|-----|-----|----|------|--------|-------------------------|-------------|---------|--|
|                   |       |                | DC              | OAL | LFS | LU | DCON | DCSFMS |                         | Clamp Screw | Wrench  |  |
| S20- DRV120M-2-03 | ●     | 2              | 12              | 82  | 39  | 24 | 20   | 27     | +0.25                   | SB-2037TRP  | FTP-6   | Outer Edge LCMT030203-□□-E<br>Inner Edge LCMT030205-□□-I |
| DRV125M-2-03      | ●     |                | 12.5            | 83  | 40  | 25 |      |        | +0.20                   |             |         |  |
| DRV130M-2-03      | ●     |                | 13              | 84  | 41  | 26 |      |        | +0.15                   |             |         |  |
| DRV135M-2-03      | ●     |                | 13.5            | 85  | 42  | 27 |      |        | +0.10                   |             |         |  |
| S20- DRV140M-2-04 | ●     | 2              | 14              | 92  | 49  | 28 | 20   | 27     | +0.40                   | SB-2037TRP  | FTP-6   | Outer Edge SCMT040205-□□-E<br>Inner Edge SCMT040209-□□-I |
| DRV145M-2-04      | ●     |                | 14.5            | 93  | 50  | 29 |      |        | +0.35                   |             |         |  |
| DRV150M-2-04      | ●     |                | 15              | 94  | 51  | 30 |      |        | +0.30                   |             |         |  |
| DRV155M-2-04      | ●     |                | 15.5            | 95  | 52  | 31 |      |        | +0.25                   |             |         |  |
| S25- DRV160M-2-05 | ●     | 2              | 16              | 110 | 56  | 32 | 25   | 32     | +0.40                   | SB-2041TRP  | FTP-6   | Outer Edge SCMT050205-□□-E<br>Inner Edge SCMT050210-□□-I |
| DRV165M-2-05      | ●     |                | 16.5            | 111 | 57  | 33 |      |        | +0.35                   |             |         |  |
| DRV170M-2-05      | ●     |                | 17              | 112 | 58  | 34 |      |        | +0.30                   |             |         |  |
| DRV175M-2-05      | ●     |                | 17.5            | 113 | 59  | 35 |      |        | +0.25                   |             |         |  |
| DRV180M-2-05      | ●     |                | 18              | 114 | 60  | 36 |      |        | +0.20                   |             |         |  |
| DRV185M-2-05      | ●     |                | 18.5            | 115 | 61  | 37 |      |        | +0.15                   |             |         |  |
| S25- DRV190M-2-06 | ●     | 2              | 19              | 113 | 59  | 38 | 25   | 32     | +0.65                   | SB-2555TRP  | DTPM-8  | Outer Edge SCMT060205-□□-E<br>Inner Edge SCMT060210-□□-I |
| DRV195M-2-06      | ●     |                | 19.5            | 114 | 60  | 39 |      |        | +0.60                   |             |         |  |
| DRV200M-2-06      | ●     |                | 20              | 115 | 61  | 40 |      |        | +0.55                   |             |         |  |
| DRV205M-2-06      | ●     |                | 20.5            | 116 | 62  | 41 |      |        | +0.50                   |             |         |  |
| DRV210M-2-06      | ●     |                | 21              | 117 | 63  | 42 |      |        | +0.45                   |             |         |  |
| DRV215M-2-06      | ●     |                | 21.5            | 118 | 64  | 43 |      |        | +0.35                   |             |         |  |
| DRV220M-2-06      | ●     |                | 22              | 119 | 65  | 44 |      |        | +0.30                   |             |         |  |
| S25- DRV225M-2-07 | ●     | 2              | 22.5            | 120 | 66  | 45 | 25   | 32     | +0.90                   | SB-3060TRP  | DTPM-10 | Outer Edge SCMT070305-□□-E<br>Inner Edge SCMT070310-□□-I |
| DRV230M-2-07      | ●     |                | 23              | 121 | 67  | 46 |      |        | +0.80                   |             |         |  |
| DRV235M-2-07      | ●     |                | 23.5            | 122 | 68  | 47 |      |        | +0.75                   |             |         |  |
| DRV240M-2-07      | ●     |                | 24              | 123 | 69  | 48 |      |        | +0.70                   |             |         |  |
| DRV245M-2-07      | ●     |                | 24.5            | 124 | 70  | 49 |      |        | +0.65                   |             |         |  |
| DRV250M-2-07      | ●     |                | 25              | 125 | 71  | 50 |      |        | +0.60                   |             |         |  |
| DRV255M-2-07      | ●     |                | 25.5            | 126 | 72  | 51 |      |        | +0.50                   |             |         |  |
| DRV260M-2-07      | ●     |                | 26              | 127 | 73  | 52 |      |        | +0.45                   |             |         |  |
| S32- DRV270M-2-09 | ●     | 2              | 27              | 136 | 77  | 54 | 32   | 41     | +1.05                   | SB-3573TRP  | DTPM-10 | Outer Edge SCMT090405-□□-E<br>Inner Edge SCMT090410-□□-I |
| DRV280M-2-09      | ●     |                | 28              | 138 | 79  | 56 |      |        | +0.95                   |             |         |  |
| DRV290M-2-09      | ●     |                | 29              | 140 | 81  | 58 |      |        | +0.85                   |             |         |  |
| DRV300M-2-09      | ●     |                | 30              | 142 | 83  | 60 |      |        | +0.75                   |             |         |  |
| DRV310M-2-09      | ●     |                | 31              | 144 | 85  | 62 |      |        | +0.60                   |             |         |  |
| DRV320M-2-09      | ●     |                | 32              | 146 | 87  | 64 |      |        | +0.50                   |             |         |  |

· When offset drilling, reduce feed rate to 0.08mm/rev or less  
· See page 21 for adjustable sleeve (SHE)

● : Standard Stock

# DRV Holder

## Toolholder Dimensions 2D

(Drilling Depth : 2 × DC)

| Description             | Stock | No. of Inserts | Dimensions (mm) |     |     |     |      |        | Max. Radial Offset (mm) | Spare Parts  |         | Applicable Inserts                                       |
|-------------------------|-------|----------------|-----------------|-----|-----|-----|------|--------|-------------------------|--------------|---------|--|
|                         |       |                | DC              | OAL | LFS | LU  | DCON | DCSFMS |                         | Clamp Screw  | Wrench  |  |
| S40- DRV330M-2-11       | ●     | 2              | 33              | 161 | 92  | 66  | 40   | 49     | +1.25                   | SB-4086TRP   | DTPM-15 | Outer Edge SCMT110406-□□-E<br>Inner Edge SCMT110410-□□-I |
| DRV340M-2-11            | ●     |                | 34              | 163 | 94  | 68  |      |        | +1.15                   |              |         |  |
| DRV350M-2-11            | ●     |                | 35              | 165 | 96  | 70  |      |        | +1.00                   |              |         |  |
| DRV360M-2-11            | ●     |                | 36              | 167 | 98  | 72  |      |        | +0.90                   |              |         |  |
| DRV370M-2-11            | ●     |                | 37              | 169 | 100 | 74  |      |        | +0.80                   |              |         |  |
| DRV380M-2-11            | ●     |                | 38              | 171 | 102 | 76  |      |        | +0.65                   |              |         |  |
| DRV390M-2-11            | ●     |                | 39              | 173 | 104 | 78  |      |        | +0.55                   |              |         |  |
| S40- DRV400M-2-14       | ●     | 2              | 40              | 181 | 112 | 80  | 40   | 49     | +1.75                   | SB-50120TRPH | TTP-20  | Outer Edge SCMT140508-□□-E<br>Inner Edge SCMT140510-□□-I |
| <b>NEW</b> DRV410M-2-14 | ●     |                | 41              | 183 | 114 | 82  |      |        | +1.60                   |              |         |  |
| DRV420M-2-14            | ●     |                | 42              | 185 | 116 | 84  |      |        | +1.50                   |              |         |  |
| DRV430M-2-14            | ●     |                | 43              | 187 | 118 | 86  |      |        | +1.40                   |              |         |  |
| DRV440M-2-14            | ●     |                | 44              | 189 | 120 | 88  |      |        | +1.30                   |              |         |  |
| DRV450M-2-14            | ●     |                | 45              | 191 | 122 | 90  |      |        | +1.15                   |              |         |  |
| DRV460M-2-14            | ●     |                | 46              | 193 | 124 | 92  |      | 54     | +1.05                   |              |         |  |
| DRV470M-2-14            | ●     |                | 47              | 195 | 126 | 94  |      |        | +0.95                   |              |         |  |
| DRV480M-2-14            | ●     |                | 48              | 197 | 128 | 96  |      |        | +0.80                   |              |         |  |
| DRV490M-2-14            | ●     |                | 49              | 199 | 130 | 98  |      |        | +0.70                   |              |         |  |
| S40- DRV500M-2-17       | ●     | 2              | 50              | 198 | 129 | 100 | 40   | 59     | +2.10                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| <b>NEW</b> DRV510M-2-17 | ●     |                | 51              | 200 | 131 | 102 |      |        | +1.95                   |              |         |  |
| DRV520M-2-17            | ●     |                | 52              | 202 | 133 | 104 |      |        | +1.85                   |              |         |  |
| DRV530M-2-17            | ●     |                | 53              | 204 | 135 | 106 |      |        | +1.75                   |              |         |  |
| DRV540M-2-17            | ●     |                | 54              | 206 | 137 | 108 |      |        | +1.65                   |              |         |  |
| DRV550M-2-17            | ●     |                | 55              | 208 | 139 | 110 |      |        | +1.50                   |              |         |  |
| DRV560M-2-17            | ●     |                | 56              | 210 | 141 | 112 |      | +1.40  | 64                      |              |         |  |
| DRV570M-2-17            | ●     |                | 57              | 212 | 143 | 114 |      | +1.30  |                         |              |         |  |
| DRV580M-2-17            | ●     |                | 58              | 214 | 145 | 116 |      | +1.15  |                         |              |         |  |
| DRV590M-2-17            | ●     |                | 59              | 216 | 147 | 118 |      | +1.05  |                         |              |         |  |
| DRV600M-2-17            | ●     |                | 60              | 218 | 149 | 120 |      | +0.95  |                         |              |         |  |

· When offset drilling, reduce feed rate to 0.08mm/rev or less  
· See page 21 for adjustable sleeve (SHE)


● : Standard Stock

### ■ Estimated Cutting Tolerance (2D)

| DC        | Estimated Cutting Tolerance (mm) |
|-----------|----------------------------------|
| ø12 - ø60 | +0.30<br>0                       |

The above values are estimates.  
These values may change due to machine, workpiece, clamping power, and cutting conditions.

# DRV Holder

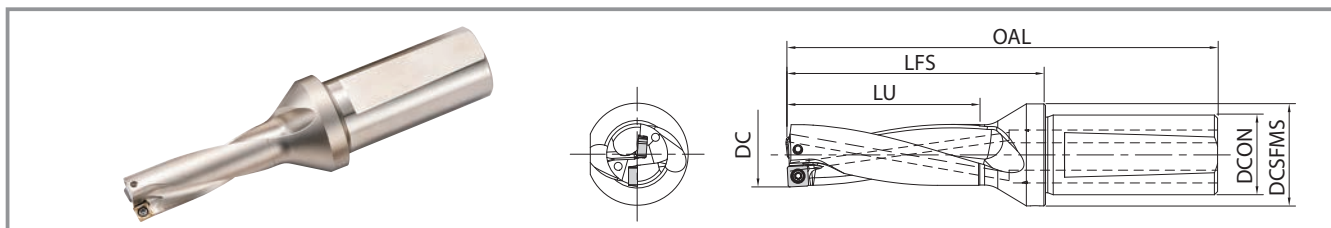

## Toolholder Dimensions

3D

(Drilling Depth : 3 × DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |      |     |      |       |        | Max. Radial Offset (mm) | Spare Parts |        | Applicable Inserts                                       |         |
|-------------------|-------|----------------|-----------------|------|-----|------|-------|--------|-------------------------|-------------|--------|--|---------|
|                   |       |                | DC              | OAL  | LFS | LU   | DCON  | DCSFMS |                         | Clamp Screw | Wrench |  |         |
| S20- DRV120M-3-03 | ●     | 2              | 12              | 94   | 51  | 36   | 20    | 27     | +0.25                   | SB-2037TRP  | FTP-6  | Outer Edge LCMT030203-□□-E<br>Inner Edge LCMT030205-□□-I |         |
| DRV125M-3-03      | ●     |                | 12.5            | 96   | 53  | 37.5 |       |        |                         |             |        |  | +0.20   |
| DRV130M-3-03      | ●     |                | 13              | 97   | 54  | 39   |       |        |                         |             |        |  |         |
| DRV135M-3-03      | ●     |                | 13.5            | 99   | 56  | 40.5 |       |        |                         |             |        |  |         |
| S20- DRV140M-3-04 | ●     | 2              | 14              | 106  | 63  | 42   | 20    | 27     | +0.40                   | SB-2037TRP  | FTP-6  | Outer Edge SCMT040205-□□-E<br>Inner Edge SCMT040209-□□-I |         |
| DRV145M-3-04      | ●     |                | 14.5            | 108  | 65  | 43.5 |       |        |                         |             |        |  | +0.35   |
| DRV150M-3-04      | ●     |                | 15              | 109  | 66  | 45   |       |        |                         |             |        |  |         |
| DRV155M-3-04      | ●     |                | 15.5            | 111  | 68  | 46.5 |       |        |                         |             |        |  |         |
| S25- DRV160M-3-05 | ●     | 2              | 16              | 126  | 72  | 48   | 25    | 32     | +0.40                   | SB-2041TRP  | FTP-6  | Outer Edge SCMT050205-□□-E<br>Inner Edge SCMT050210-□□-I |         |
| DRV165M-3-05      | ●     |                | 16.5            | 127  | 73  | 49.5 |       |        |                         |             |        |  | +0.35   |
| DRV170M-3-05      | ●     |                | 17              | 129  | 75  | 51   |       |        |                         |             |        |  |         |
| DRV175M-3-05      | ●     |                | 17.5            | 130  | 76  | 52.5 |       |        |                         |             |        |  |         |
| DRV180M-3-05      | ●     |                | 18              | 132  | 78  | 54   |       |        |                         |             |        |  |         |
| DRV185M-3-05      | ●     |                | 18.5            | 133  | 79  | 55.5 |       |        |                         |             |        |  |         |
| S25- DRV190M-3-06 | ●     | 2              | 19              | 132  | 78  | 57   | 25    | 32     | +0.65                   | SB-2555TRP  | DTPM-8 | Outer Edge SCMT060205-□□-E<br>Inner Edge SCMT060210-□□-I |         |
| DRV195M-3-06      | ●     |                | 19.5            | 134  | 80  | 58.5 |       |        |                         |             |        |  | +0.60   |
| DRV200M-3-06      | ●     |                | 20              | 135  | 81  | 60   |       |        |                         |             |        |  |         |
| DRV205M-3-06      | ●     |                | 20.5            | 137  | 83  | 61.5 |       |        |                         |             |        |  |         |
| DRV210M-3-06      | ●     |                | 21              | 138  | 84  | 63   |       |        |                         |             |        |  |         |
| DRV215M-3-06      | ●     |                | 21.5            | 140  | 86  | 64.5 |       |        |                         |             |        |  |         |
| DRV220M-3-06      | ●     |                | 22              | 141  | 87  | 66   |       |        |                         |             |        |  |         |
| S25- DRV225M-3-07 | ●     |                | 2               | 22.5 | 142 | 88   |       |        |                         |             |        |  |         |
| DRV230M-3-07      | ●     | 23             |                 | 144  | 90  | 69   | +0.80 |        |                         |             |        |  |         |
| DRV235M-3-07      | ●     | 23.5           |                 | 145  | 91  | 70.5 |       |        |                         |             |        |  |         |
| DRV240M-3-07      | ●     | 24             |                 | 147  | 93  | 72   |       |        |                         |             |        |  |         |
| DRV245M-3-07      | ●     | 24.5           |                 | 148  | 94  | 73.5 |       |        |                         |             |        |  |         |
| DRV250M-3-07      | ●     | 25             |                 | 150  | 96  | 75   |       |        |                         |             |        |  |         |
| DRV255M-3-07      | ●     | 25.5           |                 | 151  | 97  | 76.5 |       |        |                         |             |        |  |         |
| DRV260M-3-07      | ●     | 26             |                 | 153  | 99  | 78   |       |        |                         |             |        |  |         |
| S32- DRV265M-3-09 | ●     | 2              |                 | 26.5 | 161 | 102  |       | 79.5   | 32                      | 41          | +1.15  | SB-3573TRP   | DTPM-10 |
| DRV270M-3-09      | ●     |                | 27              | 163  | 104 | 81   | +1.05 |        |                         |             |        |  |         |
| DRV275M-3-09      | ●     |                | 27.5            | 164  | 105 | 82.5 |       |        |                         |             |        |  |         |
| DRV280M-3-09      | ●     |                | 28              | 166  | 107 | 84   |       |        |                         |             |        |  |         |
| DRV285M-3-09      | ●     |                | 28.5            | 167  | 108 | 85.5 |       |        |                         |             |        |  |         |
| DRV290M-3-09      | ●     |                | 29              | 169  | 110 | 87   |       |        |                         |             |        |  |         |
| DRV295M-3-09      | ●     |                | 29.5            | 170  | 111 | 88.5 |       |        |                         |             |        |  |         |
| DRV300M-3-09      | ●     |                | 30              | 172  | 113 | 90   |       |        |                         |             |        |  |         |
| DRV305M-3-09      | ●     |                | 30.5            | 173  | 114 | 91.5 |       |        |                         |             |        |  |         |
| DRV310M-3-09      | ●     |                | 31              | 175  | 116 | 93   |       |        |                         |             |        |  |         |
| DRV315M-3-09      | ●     |                | 31.5            | 176  | 117 | 94.5 |       |        |                         |             |        |  |         |
| DRV320M-3-09      | ●     |                | 32              | 178  | 119 | 96   |       |        |                         |             |        |  |         |

· When offset drilling, reduce feed rate to 0.08mm/rev or less  
· See page 21 for adjustable sleeve (SHE)

● : Standard Stock



# DRV Holder

## Toolholder Dimensions **3D**

(Drilling Depth : 3 × DC)

| Description             | Stock | No. of Inserts | Dimensions (mm) |     |     |     |      |        | Max. Radial Offset (mm) | Spare Parts  |         | Applicable Inserts                                       |
|-------------------------|-------|----------------|-----------------|-----|-----|-----|------|--------|-------------------------|--------------|---------|--|
|                         |       |                | DC              | OAL | LFS | LU  | DCON | DCSFMS |                         | Clamp Screw  | Wrench  |  |
| S40- DRV330M-3-11       | ●     | 2              | 33              | 194 | 125 | 99  | 40   | 49     | +1.25                   | SB-4086TRP   | DTPM-15 | Outer Edge SCMT110406-□□-E<br>Inner Edge SCMT110410-□□-I |
| DRV340M-3-11            | ●     |                | 34              | 197 | 128 | 102 |      |        | +1.15                   |              |         |  |
| DRV350M-3-11            | ●     |                | 35              | 200 | 131 | 105 |      |        | +1.00                   |              |         |  |
| DRV360M-3-11            | ●     |                | 36              | 203 | 134 | 108 |      |        | +0.90                   |              |         |  |
| DRV370M-3-11            | ●     |                | 37              | 206 | 137 | 111 |      |        | +0.80                   |              |         |  |
| DRV380M-3-11            | ●     |                | 38              | 209 | 140 | 114 |      |        | +0.65                   |              |         |  |
| DRV390M-3-11            | ●     |                | 39              | 212 | 143 | 117 |      |        | +0.55                   |              |         |  |
| S40- DRV400M-3-14       | ●     | 2              | 40              | 221 | 152 | 120 | 40   | 49     | +1.75                   | SB-50120TRPH | TTP-20  | Outer Edge SCMT140508-□□-E<br>Inner Edge SCMT140510-□□-I |
| <b>NEW</b> DRV410M-3-14 | ●     |                | 41              | 224 | 155 | 123 |      |        | +1.60                   |              |         |  |
| DRV420M-3-14            | ●     |                | 42              | 227 | 158 | 126 |      |        | +1.50                   |              |         |  |
| DRV430M-3-14            | ●     |                | 43              | 230 | 161 | 129 |      |        | +1.40                   |              |         |  |
| DRV440M-3-14            | ●     |                | 44              | 233 | 164 | 132 |      |        | +1.30                   |              |         |  |
| DRV450M-3-14            | ●     |                | 45              | 236 | 167 | 135 |      |        | +1.15                   |              |         |  |
| DRV460M-3-14            | ●     |                | 46              | 239 | 170 | 138 |      | +1.05  |                         |              |         |  |
| DRV470M-3-14            | ●     |                | 47              | 242 | 173 | 141 |      | +0.95  |                         |              |         |  |
| DRV480M-3-14            | ●     |                | 48              | 245 | 176 | 144 |      | +0.80  |                         |              |         |  |
| DRV490M-3-14            | ●     |                | 49              | 248 | 179 | 147 |      | +0.70  |                         |              |         |  |
| S40- DRV500M-3-17       | ●     | 2              | 50              | 248 | 179 | 150 | 40   | 59     | +2.10                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| <b>NEW</b> DRV510M-3-17 | ●     |                | 51              | 251 | 182 | 153 |      |        | +1.95                   |              |         |  |
| DRV520M-3-17            | ●     |                | 52              | 254 | 185 | 156 |      |        | +1.85                   |              |         |  |
| DRV530M-3-17            | ●     |                | 53              | 257 | 188 | 159 |      |        | +1.75                   |              |         |  |
| DRV540M-3-17            | ●     |                | 54              | 260 | 191 | 162 |      |        | +1.65                   |              |         |  |
| DRV550M-3-17            | ●     |                | 55              | 263 | 194 | 165 |      |        | +1.50                   |              |         |  |
| DRV560M-3-17            | ●     |                | 56              | 266 | 197 | 168 |      | +1.40  |                         |              |         |  |
| DRV570M-3-17            | ●     |                | 57              | 269 | 200 | 171 |      | +1.30  |                         |              |         |  |
| DRV580M-3-17            | ●     |                | 58              | 272 | 203 | 174 |      | +1.15  |                         |              |         |  |
| DRV590M-3-17            | ●     |                | 59              | 275 | 206 | 177 |      | +1.05  |                         |              |         |  |
| DRV600M-3-17            | ●     |                | 60              | 278 | 209 | 180 |      | +0.95  |                         |              |         |  |

· When offset drilling, reduce feed rate to 0.08mm/rev or less  
· See page 21 for adjustable sleeve (SHE)


● : Standard Stock

### ■ Estimated Cutting Tolerance (3D)

| DC        | Estimated Cutting Tolerance (mm) |
|-----------|----------------------------------|
| ø12 - ø60 | +0.30<br>0                       |

The above values are estimates.  
These values may change due to machine, workpiece, clamping power, and cutting conditions.

# DRV Holder

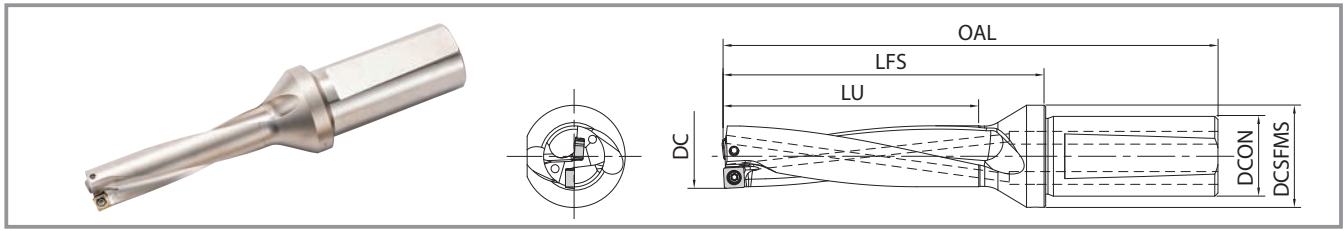

## Toolholder Dimensions

4D

(Drilling Depth : 4 × DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |     |     |     |      |        | Max. Radial Offset (mm) | Spare Parts |         | Applicable Inserts                                       |
|-------------------|-------|----------------|-----------------|-----|-----|-----|------|--------|-------------------------|-------------|---------|--|
|                   |       |                | DC              | OAL | LFS | LU  | DCON | DCSFMS |                         | Clamp Screw | Wrench  |  |
| S20- DRV120M-4-03 | ●     | 2              | 12              | 106 | 63  | 48  | 20   | 27     | +0.25                   | SB-2037TRP  | FTP-6   | Outer Edge LCMT030203-□□-E<br>Inner Edge LCMT030205-□□-I |
| DRV125M-4-03      | ●     |                | 12.5            | 108 | 65  | 50  |      |        | +0.20                   |             |         |  |
| DRV130M-4-03      | ●     |                | 13              | 110 | 67  | 52  |      |        | +0.15                   |             |         |  |
| DRV135M-4-03      | ●     |                | 13.5            | 112 | 69  | 54  |      |        | +0.10                   |             |         |  |
| S20- DRV140M-4-04 | ●     | 2              | 14              | 120 | 77  | 56  | 20   | 27     | +0.40                   | SB-2037TRP  | FTP-6   | Outer Edge SCMT040205-□□-E<br>Inner Edge SCMT040209-□□-I |
| DRV145M-4-04      | ●     |                | 14.5            | 122 | 79  | 58  |      |        | +0.35                   |             |         |  |
| DRV150M-4-04      | ●     |                | 15              | 124 | 81  | 60  |      |        | +0.30                   |             |         |  |
| DRV155M-4-04      | ●     |                | 15.5            | 126 | 83  | 62  |      |        | +0.25                   |             |         |  |
| S25- DRV160M-4-05 | ●     | 2              | 16              | 142 | 88  | 64  | 25   | 32     | +0.40                   | SB-2041TRP  | FTP-6   | Outer Edge SCMT050205-□□-E<br>Inner Edge SCMT050210-□□-I |
| DRV165M-4-05      | ●     |                | 16.5            | 144 | 90  | 66  |      |        | +0.35                   |             |         |  |
| DRV170M-4-05      | ●     |                | 17              | 146 | 92  | 68  |      |        | +0.30                   |             |         |  |
| DRV175M-4-05      | ●     |                | 17.5            | 148 | 94  | 70  |      |        | +0.25                   |             |         |  |
| DRV180M-4-05      | ●     |                | 18              | 150 | 96  | 72  |      |        | +0.20                   |             |         |  |
| DRV185M-4-05      | ●     |                | 18.5            | 152 | 98  | 74  |      |        | +0.15                   |             |         |  |
| S25- DRV190M-4-06 | ●     | 2              | 19              | 151 | 97  | 76  | 25   | 32     | +0.65                   | SB-2555TRP  | DTPM-8  | Outer Edge SCMT060205-□□-E<br>Inner Edge SCMT060210-□□-I |
| DRV195M-4-06      | ●     |                | 19.5            | 153 | 99  | 78  |      |        | +0.60                   |             |         |  |
| DRV200M-4-06      | ●     |                | 20              | 155 | 101 | 80  |      |        | +0.55                   |             |         |  |
| DRV205M-4-06      | ●     |                | 20.5            | 157 | 103 | 82  |      |        | +0.50                   |             |         |  |
| DRV210M-4-06      | ●     |                | 21              | 159 | 105 | 84  |      |        | +0.45                   |             |         |  |
| DRV215M-4-06      | ●     |                | 21.5            | 161 | 107 | 86  |      |        | +0.35                   |             |         |  |
| DRV220M-4-06      | ●     |                | 22              | 163 | 109 | 88  |      |        | +0.30                   |             |         |  |
| S25- DRV225M-4-07 | ●     | 2              | 22.5            | 165 | 111 | 90  | 25   | 32     | +0.90                   | SB-3060TRP  | DTPM-10 | Outer Edge SCMT070305-□□-E<br>Inner Edge SCMT070310-□□-I |
| DRV230M-4-07      | ●     |                | 23              | 167 | 113 | 92  |      |        | +0.80                   |             |         |  |
| DRV235M-4-07      | ●     |                | 23.5            | 169 | 115 | 94  |      |        | +0.75                   |             |         |  |
| DRV240M-4-07      | ●     |                | 24              | 171 | 117 | 96  |      |        | +0.70                   |             |         |  |
| DRV245M-4-07      | ●     |                | 24.5            | 173 | 119 | 98  |      |        | +0.65                   |             |         |  |
| DRV250M-4-07      | ●     |                | 25              | 175 | 121 | 100 |      |        | +0.60                   |             |         |  |
| DRV255M-4-07      | ●     |                | 25.5            | 177 | 123 | 102 |      |        | +0.50                   |             |         |  |
| DRV260M-4-07      | ●     |                | 26              | 179 | 125 | 104 |      |        | +0.45                   |             |         |  |
| S32- DRV270M-4-09 | ●     | 2              | 27              | 190 | 131 | 108 | 32   | 41     | +1.05                   | SB-3573TRP  | DTPM-10 | Outer Edge SCMT090405-□□-E<br>Inner Edge SCMT090410-□□-I |
| DRV280M-4-09      | ●     |                | 28              | 194 | 135 | 112 |      |        | +0.95                   |             |         |  |
| DRV290M-4-09      | ●     |                | 29              | 198 | 139 | 116 |      |        | +0.85                   |             |         |  |
| DRV300M-4-09      | ●     |                | 30              | 202 | 143 | 120 |      |        | +0.75                   |             |         |  |
| DRV310M-4-09      | ●     |                | 31              | 206 | 147 | 124 |      |        | +0.60                   |             |         |  |
| DRV320M-4-09      | ●     |                | 32              | 210 | 151 | 128 |      |        | +0.50                   |             |         |  |

· When offset drilling, reduce feed rate to 0.06mm/rev or less  
· See page 21 for adjustable sleeve (SHE)

● : Standard Stock

# DRV Holder

## Toolholder Dimensions

4D

(Drilling Depth : 4 × DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |     |     |     |      |        | Max. Radial Offset (mm) | Spare Parts  |         | Applicable Inserts                                       |
|-------------------|-------|----------------|-----------------|-----|-----|-----|------|--------|-------------------------|--------------|---------|--|
|                   |       |                | DC              | OAL | LFS | LU  | DCON | DCSFMS |                         | Clamp Screw  | Wrench  |  |
| S40- DRV330M-4-11 | ●     | 2              | 33              | 227 | 158 | 132 | 40   | 49     | +1.25                   | SB-4086TRP   | DTPM-15 | Outer Edge SCMT110406-□□-E<br>Inner Edge SCMT110410-□□-I |
| DRV340M-4-11      | ●     |                | 34              | 231 | 162 | 136 |      |        | +1.15                   |              |         |  |
| DRV350M-4-11      | ●     |                | 35              | 235 | 166 | 140 |      |        | +1.00                   |              |         |  |
| DRV360M-4-11      | ●     |                | 36              | 239 | 170 | 144 |      |        | +0.90                   |              |         |  |
| DRV370M-4-11      | ●     |                | 37              | 243 | 174 | 148 |      |        | +0.80                   |              |         |  |
| DRV380M-4-11      | ●     |                | 38              | 247 | 178 | 152 |      |        | +0.65                   |              |         |  |
| DRV390M-4-11      | ●     |                | 39              | 251 | 182 | 156 |      |        | +0.55                   |              |         |  |
| S40- DRV400M-4-14 | ●     | 2              | 40              | 261 | 192 | 160 | 40   | 49     | +1.75                   | SB-50120TRPH | TTP-20  | Outer Edge SCMT140508-□□-E<br>Inner Edge SCMT140510-□□-I |
| NEW DRV410M-4-14  | ●     |                | 41              | 265 | 196 | 164 |      |        | +1.60                   |              |         |  |
| DRV420M-4-14      | ●     |                | 42              | 269 | 200 | 168 |      |        | +1.50                   |              |         |  |
| DRV430M-4-14      | ●     |                | 43              | 273 | 204 | 172 |      |        | +1.40                   |              |         |  |
| DRV440M-4-14      | ●     |                | 44              | 277 | 208 | 176 |      | +1.30  |                         |              |         |  |
| DRV450M-4-14      | ●     |                | 45              | 281 | 212 | 180 |      | +1.15  |                         |              |         |  |
| DRV460M-4-14      | ●     |                | 46              | 285 | 216 | 184 |      | +1.05  |                         |              |         |  |
| DRV470M-4-14      | ●     |                | 47              | 289 | 220 | 188 |      | +0.95  |                         |              |         |  |
| S50- DRV480M-4-14 | ●     | 2              | 48              | 293 | 224 | 192 | 50   | 59     | +0.80                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| NEW DRV490M-4-14  | ●     |                | 49              | 297 | 228 | 196 |      |        | +0.70                   |              |         |  |
| S50- DRV500M-4-17 | ●     | 2              | 50              | 298 | 229 | 200 | 50   | 59     | +2.10                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| NEW DRV510M-4-17  | ●     |                | 51              | 302 | 233 | 204 |      |        | +1.95                   |              |         |  |
| DRV520M-4-17      | ●     |                | 52              | 306 | 237 | 208 |      |        | +1.85                   |              |         |  |
| DRV530M-4-17      | ●     |                | 53              | 310 | 241 | 212 |      |        | +1.75                   |              |         |  |
| DRV540M-4-17      | ●     |                | 54              | 314 | 245 | 216 |      |        | +1.65                   |              |         |  |
| DRV550M-4-17      | ●     |                | 55              | 318 | 249 | 220 |      | +1.50  |                         |              |         |  |
| DRV560M-4-17      | ●     |                | 56              | 322 | 253 | 224 |      | +1.40  |                         |              |         |  |
| DRV570M-4-17      | ●     |                | 57              | 326 | 257 | 228 |      | +1.30  |                         |              |         |  |
| DRV580M-4-17      | ●     |                | 58              | 330 | 261 | 232 |      | +1.15  |                         |              |         |  |
| DRV590M-4-17      | ●     |                | 59              | 334 | 265 | 236 |      | +1.05  |                         |              |         |  |
| DRV600M-4-17      | ●     |                | 60              | 338 | 269 | 240 |      | +0.95  |                         |              |         |  |

· When offset drilling, reduce feed rate to 0.06mm/rev or less  
 · See page 21 for adjustable sleeve (SHE)


● : Standard Stock

### ■ Estimated Cutting Tolerance (4D)

| DC        | Estimated Cutting Tolerance (mm) |
|-----------|----------------------------------|
| ø12 - ø39 | +0.35<br>0                       |
| ø40 - ø60 | +0.40<br>0                       |

The above values are estimates.  
 These values may change due to machine, workpiece, clamping power, and cutting conditions.

# DRV Holder

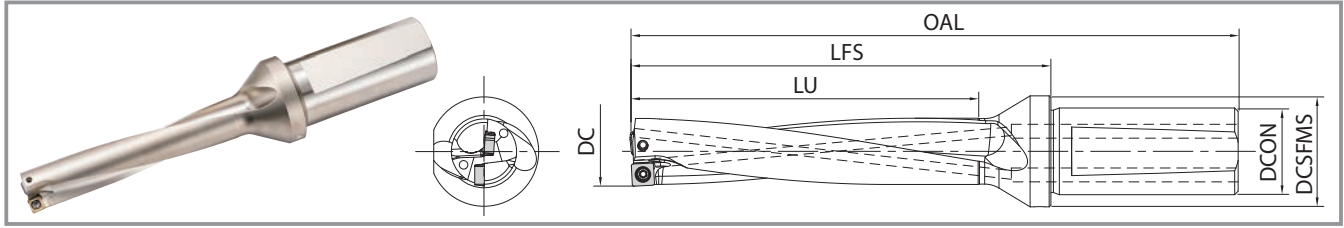

## Toolholder Dimensions

5D

(Drilling Depth : 5 × DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |     |     |       |      |        | Max. Radial Offset (mm) | Spare Parts  |         | Applicable Inserts                                       |
|-------------------|-------|----------------|-----------------|-----|-----|-------|------|--------|-------------------------|--------------|---------|--|
|                   |       |                | DC              | OAL | LFS | LU    | DCON | DCSFMS |                         | Clamp Screw  | Wrench  |  |
| S20- DRV120M-5-03 | ●     | 2              | 12              | 118 | 75  | 60    | 20   | 27     | +0.25                   | SB-2037TRP   | FTP-6   | Outer Edge LCMT030203-□□-E<br>Inner Edge LCMT030205-□□-I |
| DRV130M-5-03      | ●     |                | 13              | 123 | 80  | 65    |      |        | +0.15                   |              |         |  |
| S20- DRV140M-5-04 | ●     | 2              | 14              | 134 | 91  | 70    | 20   | 27     | +0.40                   | SB-2037TRP   | FTP-6   | Outer Edge SCMT040205-□□-E<br>Inner Edge SCMT040209-□□-I |
| DRV150M-5-04      | ●     |                | 15              | 139 | 96  | 75    |      |        | +0.30                   |              |         |  |
| S25- DRV160M-5-05 | ●     | 2              | 16              | 158 | 104 | 80    | 25   | 32     | +0.40                   | SB-2041TRP   | FTP-6   | Outer Edge SCMT050205-□□-E<br>Inner Edge SCMT050210-□□-I |
| DRV170M-5-05      | ●     |                | 17              | 163 | 109 | 85    |      |        | +0.30                   |              |         |  |
| DRV180M-5-05      | ●     |                | 18              | 168 | 114 | 90    |      |        | +0.20                   |              |         |  |
| DRV190M-5-06      | ●     |                | 19              | 170 | 116 | 95    |      |        | +0.65                   |              |         |  |
| S25- DRV200M-5-06 | ●     | 2              | 20              | 175 | 121 | 100   | 25   | 32     | +0.55                   | SB-2555TRP   | DTPM-8  | Outer Edge SCMT060205-□□-E<br>Inner Edge SCMT060210-□□-I |
| DRV210M-5-06      | ●     |                | 21              | 180 | 126 | 105   |      |        | +0.45                   |              |         |  |
| DRV220M-5-06      | ●     |                | 22              | 185 | 131 | 110   |      |        | +0.30                   |              |         |  |
| DRV230M-5-07      | ●     |                | 23              | 190 | 136 | 115   |      |        | +0.80                   |              |         |  |
| S25- DRV240M-5-07 | ●     | 2              | 24              | 195 | 141 | 120   | 25   | 32     | +0.70                   | SB-3060TRP   | DTPM-10 | Outer Edge SCMT070305-□□-E<br>Inner Edge SCMT070310-□□-I |
| DRV250M-5-07      | ●     |                | 25              | 200 | 146 | 125   |      |        | +0.60                   |              |         |  |
| DRV260M-5-07      | ●     |                | 26              | 205 | 151 | 130   |      |        | +0.45                   |              |         |  |
| DRV270M-5-09      | ●     |                | 27              | 217 | 158 | 135   |      |        | +1.05                   |              |         |  |
| S32- DRV280M-5-09 | ●     | 2              | 28              | 222 | 163 | 140   | 32   | 41     | +0.95                   | SB-3573TRP   | DTPM-10 | Outer Edge SCMT090405-□□-E<br>Inner Edge SCMT090410-□□-I |
| DRV290M-5-09      | ●     |                | 29              | 227 | 168 | 145   |      |        | +0.85                   |              |         |  |
| DRV300M-5-09      | ●     |                | 30              | 232 | 173 | 150   |      |        | +0.75                   |              |         |  |
| DRV310M-5-09      | ●     |                | 31              | 237 | 178 | 155   |      |        | +0.60                   |              |         |  |
| DRV320M-5-09      | ●     |                | 32              | 242 | 183 | 160   |      |        | +0.50                   |              |         |  |
| DRV330M-5-11      | ●     |                | 33              | 260 | 191 | 165   |      |        | +1.25                   |              |         |  |
| S40- DRV340M-5-11 | ●     | 2              | 34              | 265 | 196 | 170   | 40   | 49     | +1.15                   | SB-4086TRP   | DTPM-15 | Outer Edge SCMT110406-□□-E<br>Inner Edge SCMT110410-□□-I |
| DRV350M-5-11      | ●     |                | 35              | 270 | 201 | 175   |      |        | +1.00                   |              |         |  |
| DRV360M-5-11      | ●     |                | 36              | 275 | 206 | 180   |      |        | +0.90                   |              |         |  |
| DRV370M-5-11      | ●     |                | 37              | 280 | 211 | 185   |      |        | +0.80                   |              |         |  |
| DRV380M-5-11      | ●     |                | 38              | 285 | 216 | 190   |      |        | +0.65                   |              |         |  |
| DRV390M-5-11      | ●     |                | 39              | 290 | 221 | 195   |      |        | +0.55                   |              |         |  |
| S40- DRV400M-5-14 | ●     | 2              | 40              | 301 | 232 | 200   | 40   | 49     | +1.75                   | SB-50120TRPH | TTP-20  | Outer Edge SCMT140508-□□-E<br>Inner Edge SCMT140510-□□-I |
| NEW DRV410M-5-14  | ●     |                | 41              | 306 | 237 | 205   |      |        | +1.60                   |              |         |  |
| DRV420M-5-14      | ●     |                | 42              | 311 | 242 | 210   |      |        | +1.50                   |              |         |  |
| DRV430M-5-14      | ●     |                | 43              | 316 | 247 | 215   |      |        | +1.40                   |              |         |  |
| DRV440M-5-14      | ●     |                | 44              | 321 | 252 | 220   |      | +1.30  |                         |              |         |  |
| DRV450M-5-14      | ●     |                | 45              | 326 | 257 | 225   |      | +1.15  |                         |              |         |  |
| DRV460M-5-14      | ●     |                | 46              | 331 | 262 | 230   |      | +1.05  |                         |              |         |  |
| DRV470M-5-14      | ●     |                | 47              | 336 | 267 | 235   |      | +0.95  |                         |              |         |  |
| S50- DRV480M-5-14 | ●     | 2              | 48              | 341 | 272 | 240   | 50   | 59     | +0.80                   |              |         |  |
| NEW DRV490M-5-14  | ●     |                | 49              | 346 | 277 | 245   |      |        | +0.70                   |              |         |  |
| S50- DRV500M-5-17 | ●     | 2              | 50              | 348 | 279 | 250   | 50   | 59     | +2.10                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| NEW DRV510M-5-17  | ●     |                | 51              | 353 | 284 | 255   |      |        | +1.95                   |              |         |  |
| DRV520M-5-17      | ●     |                | 52              | 358 | 289 | 260   |      |        | +1.85                   |              |         |  |
| DRV530M-5-17      | ●     |                | 53              | 363 | 294 | 265   |      |        | +1.75                   |              |         |  |
| DRV540M-5-17      | ●     |                | 54              | 368 | 299 | 270   |      |        | +1.65                   |              |         |  |
| DRV550M-5-17      | ●     |                | 55              | 373 | 304 | 275   |      | +1.50  |                         |              |         |  |
| DRV560M-5-17      | ●     |                | 56              | 378 | 309 | 280   |      | +1.40  |                         |              |         |  |
| DRV570M-5-17      | ●     |                | 57              | 383 | 314 | 285   |      | +1.30  |                         |              |         |  |
| DRV580M-5-17      | ●     |                | 58              | 388 | 319 | 290   |      | +1.15  |                         |              |         |  |
| DRV590M-5-17      | ●     |                | 59              | 393 | 324 | 295   |      | +1.05  |                         |              |         |  |
| DRV600M-5-17      | ●     | 60             | 398             | 329 | 300 | +0.95 |      |        |                         |              |         |  |

\* When offset drilling, reduce feed rate to 0.05mm/rev or less - See page 21 for adjustable sleeve (SHE)


● : Standard Stock

### ■ Estimated Cutting Tolerance (5D)

| DC        | Estimated Cutting Tolerance (mm) |
|-----------|----------------------------------|
| φ12 - φ39 | +0.35<br>0                       |
| φ40 - φ60 | +0.40<br>0                       |

The left values are estimates.  
These values may change due to machine, workpiece, clamping power, and cutting conditions.

# DRV Holder

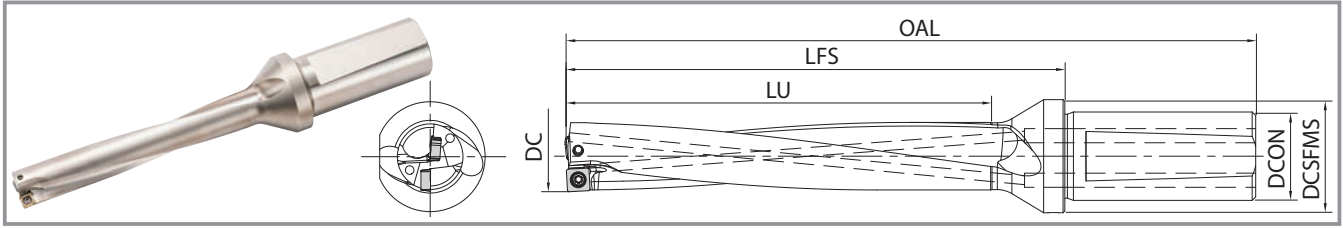

## Toolholder Dimensions

6D

(Drilling Depth : 6 × DC)

| Description       | Stock | No. of Inserts | Dimensions (mm) |     |     |     |      |        | Max. Radial Offset (mm) | Spare Parts  |         | Applicable Inserts                                       |
|-------------------|-------|----------------|-----------------|-----|-----|-----|------|--------|-------------------------|--------------|---------|--|
|                   |       |                | DC              | OAL | LFS | LU  | DCON | DCSFMS |                         | Clamp Screw  | Wrench  |  |
| S20- DRV120M-6-03 | ●     | 2              | 12              | 130 | 87  | 72  | 20   | 27     | +0.25                   | SB-2037TRP   | FTP-6   | Outer Edge LCMT030203-□□-E<br>Inner Edge LCMT030205-□□-I |
| DRV130M-6-03      | ●     |                | 13              | 136 | 93  | 78  |      |        | +0.15                   |              |         |  |
| S20- DRV140M-6-04 | ●     | 2              | 14              | 148 | 105 | 84  | 20   | 27     | +0.40                   | SB-2037TRP   | FTP-6   | Outer Edge SCMT040205-□□-E<br>Inner Edge SCMT040209-□□-I |
| DRV150M-6-04      | ●     |                | 15              | 154 | 111 | 90  |      |        | +0.30                   |              |         |  |
| S25- DRV160M-6-05 | ●     | 2              | 16              | 174 | 120 | 96  | 25   | 32     | +0.40                   | SB-2041TRP   | FTP-6   | Outer Edge SCMT050205-□□-E<br>Inner Edge SCMT050210-□□-I |
| DRV170M-6-05      | ●     |                | 17              | 180 | 126 | 102 |      |        | +0.30                   |              |         |  |
| DRV180M-6-05      | ●     |                | 18              | 186 | 132 | 108 |      |        | +0.20                   |              |         |  |
| S25- DRV190M-6-06 | ●     | 2              | 19              | 189 | 135 | 114 | 25   | 32     | +0.65                   | SB-2555TRP   | DTPM-8  | Outer Edge SCMT060205-□□-E<br>Inner Edge SCMT060210-□□-I |
| DRV200M-6-06      | ●     |                | 20              | 195 | 141 | 120 |      |        | +0.55                   |              |         |  |
| DRV210M-6-06      | ●     |                | 21              | 201 | 147 | 126 |      |        | +0.45                   |              |         |  |
| DRV220M-6-06      | ●     |                | 22              | 207 | 153 | 132 |      |        | +0.30                   |              |         |  |
| S25- DRV230M-6-07 | ●     | 2              | 23              | 213 | 159 | 138 | 25   | 32     | +0.80                   | SB-3060TRP   | DTPM-10 | Outer Edge SCMT070305-□□-E<br>Inner Edge SCMT070310-□□-I |
| DRV240M-6-07      | ●     |                | 24              | 219 | 165 | 144 |      |        | +0.70                   |              |         |  |
| DRV250M-6-07      | ●     |                | 25              | 225 | 171 | 150 |      |        | +0.60                   |              |         |  |
| DRV260M-6-07      | ●     |                | 26              | 231 | 177 | 156 |      |        | +0.45                   |              |         |  |
| S32- DRV270M-6-09 | ●     | 2              | 27              | 244 | 185 | 162 | 32   | 41     | +1.05                   | SB-3573TRP   | DTPM-10 | Outer Edge SCMT090405-□□-E<br>Inner Edge SCMT090410-□□-I |
| DRV280M-6-09      | ●     |                | 28              | 250 | 191 | 168 |      |        | +0.95                   |              |         |  |
| DRV290M-6-09      | ●     |                | 29              | 256 | 197 | 174 |      |        | +0.85                   |              |         |  |
| DRV300M-6-09      | ●     |                | 30              | 262 | 203 | 180 |      |        | +0.75                   |              |         |  |
| DRV310M-6-09      | ●     |                | 31              | 268 | 209 | 186 |      |        | +0.60                   |              |         |  |
| DRV320M-6-09      | ●     |                | 32              | 274 | 215 | 192 |      |        | +0.50                   |              |         |  |
| S40- DRV330M-6-11 | ●     | 2              | 33              | 293 | 224 | 198 | 40   | 49     | +1.25                   | SB-4086TRP   | DTPM-15 | Outer Edge SCMT110406-□□-E<br>Inner Edge SCMT110410-□□-I |
| DRV340M-6-11      | ●     |                | 34              | 299 | 230 | 204 |      |        | +1.15                   |              |         |  |
| DRV350M-6-11      | ●     |                | 35              | 305 | 236 | 210 |      |        | +1.00                   |              |         |  |
| DRV360M-6-11      | ●     |                | 36              | 311 | 242 | 216 |      |        | +0.90                   |              |         |  |
| DRV370M-6-11      | ●     |                | 37              | 317 | 248 | 222 |      |        | +0.80                   |              |         |  |
| DRV380M-6-11      | ●     |                | 38              | 323 | 254 | 228 |      |        | +0.65                   |              |         |  |
| DRV390M-6-11      | ●     |                | 39              | 329 | 260 | 234 |      |        | +0.55                   |              |         |  |
| S40- DRV400M-6-14 | ●     | 2              | 40              | 341 | 272 | 240 | 40   | 49     | +1.75                   | SB-50120TRPH | TTP-20  | Outer Edge SCMT140508-□□-E<br>Inner Edge SCMT140510-□□-I |
| NEW DRV410M-6-14  | ●     |                | 41              | 347 | 278 | 246 |      |        | +1.60                   |              |         |  |
| DRV420M-6-14      | ●     |                | 42              | 353 | 284 | 252 |      |        | +1.50                   |              |         |  |
| DRV430M-6-14      | ●     |                | 43              | 359 | 290 | 258 |      |        | +1.40                   |              |         |  |
| DRV440M-6-14      | ●     |                | 44              | 365 | 296 | 264 |      |        | +1.30                   |              |         |  |
| DRV450M-6-14      | ●     |                | 45              | 371 | 302 | 270 |      |        | +1.15                   |              |         |  |
| S50- DRV500M-6-17 | ●     | 2              | 50              | 398 | 329 | 300 | 50   | 59     | +2.10                   | SB-60130TRP  | TTP-20  | Outer Edge SCMT170608-□□-E<br>Inner Edge SCMT170610-□□-I |
| NEW DRV550M-6-17  | ●     |                | 55              | 428 | 359 | 330 |      |        | +1.50                   |              |         |  |
| DRV600M-6-17      | ●     |                | 60              | 458 | 389 | 360 |      |        | 64                      |              |         |  |

· When offset drilling, reduce feed rate to 0.04mm/rev or less · See page 21 for adjustable sleeve (SHE)









● : Standard Stock

### ■ Estimated Cutting Tolerance (6D)

| DC        | Estimated Cutting Tolerance (mm) |
|-----------|----------------------------------|
| φ12 - φ39 | +0.45<br>0                       |
| φ40 - φ60 | +0.50<br>0                       |

The left values are estimates.  
These values may change due to machine, workpiece, clamping power, and cutting conditions.


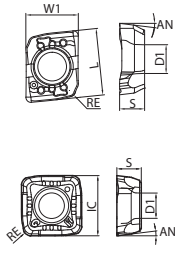

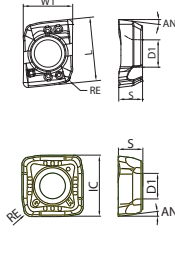



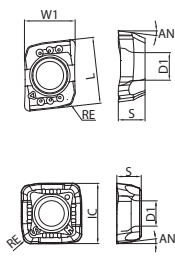
# DRV Insert

| Usage Classification  |             |                  |                 | P    | Carbon Steel • Alloy Steel |                 | ☆  | ★      |          | ★                  |        |               |
|---|-------------|------------------|-----------------|------|----------------------------|-----------------|----|--------|----------|--------------------|--------|---------------|
| ★ : 1st Recommendation (High Speed and Highly Efficient Machining)<br>☆ : 2nd Recommendation (Stable Machining Oriented)  |             |                  |                 |      | M                          | Mold Steel      |    | ☆      | ★        |                    | ★      |               |
|   |             |                  |                 | K    |                            | Stainless Steel |    | ☆      | ★        |                    | ★      |               |
| Shape   | Application | Description      | Dimensions (mm) |      |                            |                 |    | Angle  | MEGACOAT | CVD Coated Carbide |        | MEGACOAT NANO |
|   |             |                  | IC W1/L         | S    | D1                         | RE              | AN | PR1225 | CA520D   | CA415D             | PR1535 |               |
| <br>LCMT<br><br><br>SCMT<br><br>General Purpose                   |             | LCMT 030203-GM-E | 4.40/5.54       | 2.0  | 2.3                        | 0.3             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 040205-GM-E | 4.80            | 2.2  | 2.4                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 050205-GM-E | 5.25            | 2.6  | 2.4                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 060205-GM-E | 6.40            | 2.8  | 2.9                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 070305-GM-E | 7.65            | 3.2  | 3.5                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 090405-GM-E | 9.10            | 4.1  | 4.0                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 110406-GM-E | 11.00           | 4.5  | 4.6                        | 0.6             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 140508-GM-E | 13.80           | 5.0  | 5.7                        | 0.8             | 7° | ●      | ●        | ●                  |        |               |
| <br>LCMT<br><br><br>SCMT<br><br>Tough Edge                     | NEW         | LCMT 030203-GH-E | 4.40/5.54       | 2.0  | 2.3                        | 0.3             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 040205-GH-E | 4.80            | 2.2  | 2.4                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 050205-GH-E | 5.25            | 2.6  | 2.4                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 060205-GH-E | 6.40            | 2.8  | 2.9                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 070305-GH-E | 7.65            | 3.2  | 3.5                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 090405-GH-E | 9.10            | 4.1  | 4.0                        | 0.5             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 110406-GH-E | 11.00           | 4.5  | 4.6                        | 0.6             | 7° | ●      | ●        | ●                  |        |               |
|   |             | SCMT 140508-GH-E | 13.80           | 5.0  | 5.7                        | 0.8             | 7° | ●      | ●        | ●                  |        |               |
| <br>LCMT<br><br><br>SCMT<br><br>For Soft Steel Machining      |             | SCMT 040205-XM-E | 4.80            | 2.2  | 2.4                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 050205-XM-E | 5.25            | 2.6  | 2.4                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 060205-XM-E | 6.40            | 2.8  | 2.9                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 070305-XM-E | 7.65            | 3.2  | 3.5                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 090405-XM-E | 9.10            | 4.1  | 4.0                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 110406-XM-E | 11.00           | 4.5  | 4.6                        | 0.6             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 140508-XM-E | 13.80           | 5.0  | 5.7                        | 0.8             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 170608-XM-E | 16.80           | 6.58 | 6.9                        | 0.8             | 7° | ●      | ●        |                    |        |               |
| <br>LCMT<br><br><br>SCMT<br><br>For Stainless Steel Machining |             | LCMT 030203-SM-E | 4.40/5.54       | 2.0  | 2.3                        | 0.3             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 040205-SM-E | 4.80            | 2.2  | 2.4                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 050205-SM-E | 5.25            | 2.6  | 2.4                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 060205-SM-E | 6.40            | 2.8  | 2.9                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 070305-SM-E | 7.65            | 3.2  | 3.5                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 090405-SM-E | 9.10            | 4.1  | 4.0                        | 0.5             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 110406-SM-E | 11.00           | 4.5  | 4.6                        | 0.6             | 7° | ●      | ●        |                    |        |               |
|   |             | SCMT 140508-SM-E | 13.80           | 5.0  | 5.7                        | 0.8             | 7° | ●      | ●        |                    |        |               |
| SCMT 170608-SM-E  | 16.80       | 6.58             | 6.9             | 0.8  | 7°                         | ●               | ●  |        |          |                    |        |               |

\* LCMT03\*\*\* is a 2-edge insert

● : Standard Stock

# DRV Insert

| Usage Classification   |   |                             |                 | P    | Carbon Steel • Alloy Steel | ☆   | ★  |        | ★        |                    |        |               |
|--|---|-----------------------------|-----------------|------|----------------------------|-----|----|--------|----------|--------------------|--------|---------------|
| ★ : 1st Recommendation (High Speed and Highly Efficient Machining)<br>☆ : 2nd Recommendation (Stable Machining Oriented)                         |   |                             |                 | M    | Mold Steel                 | ☆   | ★  |        | ★        |                    |        |               |
|  |   |                             |                 | M    | Stainless Steel            | ☆   | ★  |        | ★        |                    |        |               |
|  |   |                             |                 | K    | Cast Iron                  | ☆   |    | ★      | ★        |                    |        |               |
| Shape  | Application   | Description                 | Dimensions (mm) |      |                            |     |    | Angle  | MEGACOAT | CVD Coated Carbide |        | MEGACOAT NANO |
|  |   |                             | IC W1/L         | S    | D1                         | RE  | AN | PR1225 | CA520D   | CA415D             | PR1535 |               |
|  <p>LCMT</p> <p>SCMT</p> <p>General Purpose</p>                 |    | LCMT 030205-GM-I            | 4.16/5.37       | 2.0  | 2.3                        | 0.5 | 7° |        |          |                    | ●      |               |
|  |   | SCMT 040209-GM-I            | 5.00            | 2.2  | 2.4                        | 0.9 | 7° |        |          |                    | ●      |               |
|  |   | 050210-GM-I                 | 5.70            | 2.6  | 2.4                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 060210-GM-I                 | 6.90            | 2.8  | 2.9                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 070310-GM-I                 | 8.20            | 3.2  | 3.5                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 090410-GM-I                 | 9.80            | 4.1  | 4.0                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 110410-GM-I                 | 11.90           | 4.5  | 4.6                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 140510-GM-I                 | 14.90           | 5.0  | 5.7                        | 1.0 | 7° |        |          |                    | ●      |               |
|  <p>LCMT</p> <p>SCMT</p> <p>Tough Edge</p>                     |   | <b>NEW</b> LCMT 030205-GH-I | 4.16/5.37       | 2.0  | 2.3                        | 0.5 | 7° |        |          |                    | ●      |               |
|  |   | SCMT 040209-GH-I            | 5.00            | 2.2  | 2.4                        | 0.9 | 7° |        |          |                    | ●      |               |
|  |   | 050210-GH-I                 | 5.70            | 2.6  | 2.4                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 060210-GH-I                 | 6.90            | 2.8  | 2.9                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 070310-GH-I                 | 8.20            | 3.2  | 3.5                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 090410-GH-I                 | 9.80            | 4.1  | 4.0                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 110410-GH-I                 | 11.90           | 4.5  | 4.6                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 140510-GH-I                 | 14.90           | 5.0  | 5.7                        | 1.0 | 7° |        |          |                    | ●      |               |
|  <p>For Soft Steel Machining</p>                              |  | SCMT 040209-XM-I            | 5.00            | 2.2  | 2.4                        | 0.9 | 7° |        |          |                    | ●      |               |
|  |   | 050210-XM-I                 | 5.70            | 2.6  | 2.4                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 060210-XM-I                 | 6.90            | 2.8  | 2.9                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 070310-XM-I                 | 8.20            | 3.2  | 3.5                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 090410-XM-I                 | 9.80            | 4.1  | 4.0                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 110410-XM-I                 | 11.90           | 4.5  | 4.6                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 140510-XM-I                 | 14.90           | 5.0  | 5.7                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 170610-XM-I                 | 17.90           | 6.58 | 6.9                        | 1.0 | 7° |        |          |                    | ●      |               |
|  <p>LCMT</p> <p>SCMT</p> <p>For Stainless Steel Machining</p> |  | LCMT 030205-SM-I            | 4.16/5.37       | 2.0  | 2.3                        | 0.5 | 7° |        |          |                    | ●      |               |
|  |   | SCMT 040209-SM-I            | 5.00            | 2.2  | 2.4                        | 0.9 | 7° |        |          |                    | ●      |               |
|  |   | 050210-SM-I                 | 5.70            | 2.6  | 2.4                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 060210-SM-I                 | 6.90            | 2.8  | 2.9                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 070310-SM-I                 | 8.20            | 3.2  | 3.5                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 090410-SM-I                 | 9.80            | 4.1  | 4.0                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 110410-SM-I                 | 11.90           | 4.5  | 4.6                        | 1.0 | 7° |        |          |                    | ●      |               |
|  |   | 140510-SM-I                 | 14.90           | 5.0  | 5.7                        | 1.0 | 7° |        |          |                    | ●      |               |
| 170610-SM-I  | 17.90   | 6.58                        | 6.9             | 1.0  | 7°                         |     |    |        | ●        |                    |        |               |

\* LCMT03\*\*\* is a 2-edge insert

● : Standard Stock



For MagicDrill DRV

# Chamfering Attachment

Free-positioning according to the drilling depth  
Versatile chamfering attachment

## 1 Double inserts provide high efficiency machining


2 inserts allow for increased feed rates  
Low cutting force reduces chattering during increased feed rates

## 2 Excellent chip evacuation


Chip flow grooves are designed to follow the flutes of the drill body delivering excellent chip evacuation

## 3 High Chattering Resistance

Molded chipbreaker on chamfering insert reduces cutting force  
Special insert design prevents fracturing on the edge  
Economical 2 edge inserts

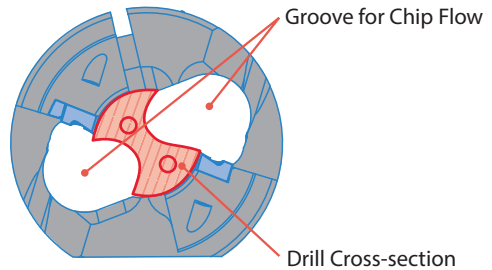


Unique Insert Design



Unique insert with 2 cutting edges for chamfering attachment

Two Inserts

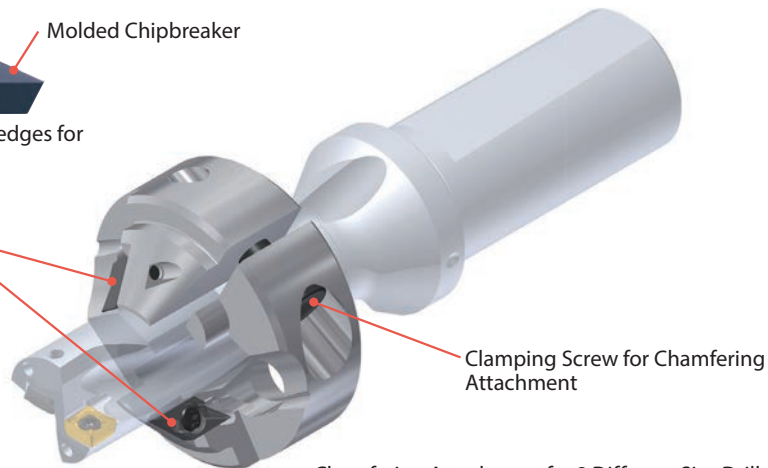

Clamping Screw for Chamfering Attachment

Chamfering Attachment for 2 Different Size Drills

### Chattering Resistance Comparison (In-house Evaluation)

Provided good surface finish on the chamfer without chattering

DRV-CH-20  
(Cutting Dia.  $\phi 20$ )



DRV-CH-20  
Smooth Surface Without Chattering

Competitor O  
(Cutting Dia.  $\phi 20$ )



Competitor O  
Chattering Occurred on the Chamfer

Cutting Conditions

Vc = 100 m/min  
f = 0.15 mm/rev


Vc = 120 m/min  
f = 0.10 mm/rev

Vc = 120 m/min  
f = 0.12 mm/rev

Workpiece : S45C  
Machine : Machining Center BT-50  
 $\phi 20$ -3D, H = 30 mm, C2.0




## Chamfering Attachment

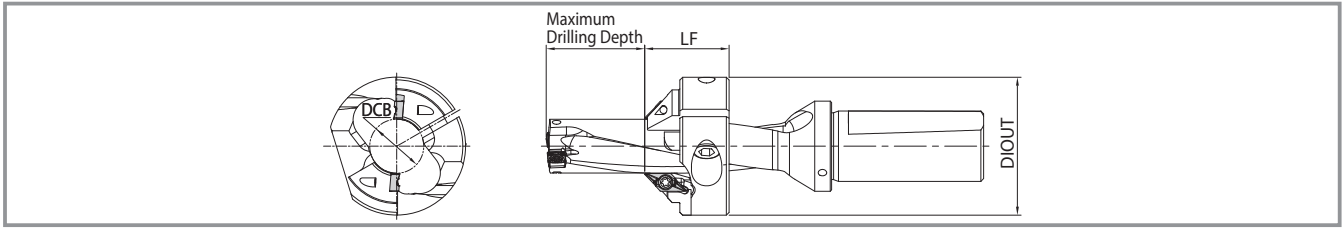


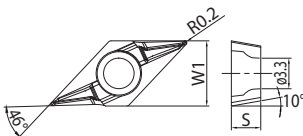
| Description | Stock | Applicable Drill Bodies              | Dimensions(mm) |      |    | Applicable Inserts | Parts       |        |                |        |  |  |  |        |      |
|-------------|-------|--------------------------------------|----------------|------|----|--------------------|-------------|--------|----------------|--------|--|--|--|--------|------|
|             |       |                                      | DIOUT          | DCB  | LF |                    | Clamp Screw | Wrench | Clamping Screw | Wrench |  |  |  |        |      |
| DRV-CH17    | ●     | S25-DRV165M-○-05<br>S25-DRV170M-○-05 | 47             | 16.2 | 30 | CH0503-45          | SB-3080TR   | FT-10  | HH6X18         | LW-5   |  |  |  |        |      |
| DRV-CH18    | ●     | S25-DRV175M-○-05<br>S25-DRV180M-○-05 | 47             | 17.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH19    | ●     | S25-DRV185M-○-05<br>S25-DRV190M-○-06 | 49             | 18.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH20    | ●     | S25-DRV195M-○-06<br>S25-DRV200M-○-06 | 49             | 19.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH21    | ●     | S25-DRV205M-○-06<br>S25-DRV210M-○-06 | 49             | 20.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH22    | ●     | S25-DRV215M-○-06<br>S25-DRV220M-○-06 | 49             | 21.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH23    | ●     | S25-DRV225M-○-07<br>S25-DRV230M-○-07 | 51             | 22.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH24    | ●     | S25-DRV235M-○-07<br>S25-DRV240M-○-07 | 51             | 23.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH25    | ●     | S25-DRV245M-○-07<br>S25-DRV250M-○-07 | 53             | 24.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH26    | ●     | S25-DRV255M-○-07<br>S25-DRV260M-○-07 | 53             | 25.2 | 30 |                    |             |        |                |        |  |  |  |        |      |
| DRV-CH27    | ●     | S32-DRV265M-○-09<br>S32-DRV270M-○-09 | 64             | 26   | 35 |                    |             |        |                |        |  |  |  | HH8X20 | LW-6 |

## Maximum Drilling Depth • Chamfering Depths

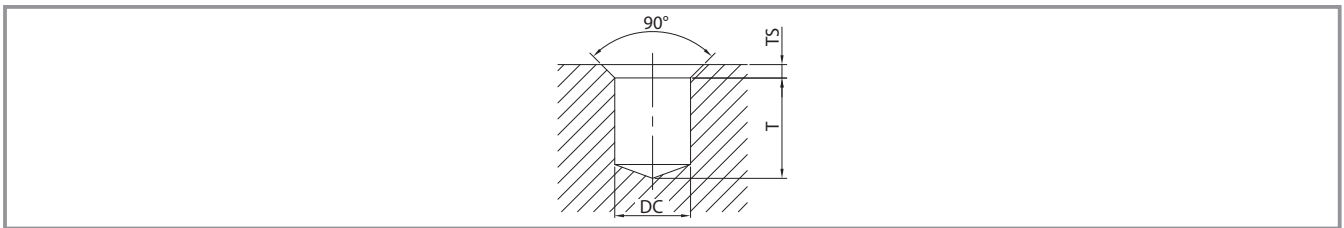


| Drilling Diameter(mm) | Maximum Drilling Depth T(mm) |          |          |          |          | Maximum Chamfering Depth(mm) | Applicable Chamfering Attachment |
|-----------------------|------------------------------|----------|----------|----------|----------|------------------------------|----------------------------------|
|                       | 2D Drill                     | 3D Drill | 4D Drill | 5D Drill | 6D Drill |                              |                                  |
| DC                    |                              |          |          |          |          | 2.5                          |                                  |
| ø16.5                 | 0.5                          | 17       | 33.5     | -        | -        |                              | DRV-CH17                         |
| ø17                   | 1.5                          | 18.5     | 35.5     | 52.5     | 69.5     |                              | DRV-CH18                         |
| ø17.5                 | 2.5                          | 20       | 37.5     | -        | -        |                              | DRV-CH19                         |
| ø18                   | 3.5                          | 21.5     | 39.5     | 57.5     | 75.5     |                              | DRV-CH20                         |
| ø18.5                 | 4.5                          | 23       | 41.5     | -        | -        |                              | DRV-CH21                         |
| ø19                   | 5.5                          | 24.5     | 43.5     | 62.5     | 81.5     |                              | DRV-CH22                         |
| ø19.5                 | 6.5                          | 26       | 45.5     | -        | -        |                              | DRV-CH23                         |
| ø20                   | 7.5                          | 27.5     | 47.5     | 67.5     | 87.5     |                              | DRV-CH24                         |
| ø20.5                 | 8.5                          | 29       | 49.5     | -        | -        |                              | DRV-CH25                         |
| ø21                   | 9.5                          | 30.5     | 51.5     | 72.5     | 93.5     |                              | DRV-CH26                         |
| ø21.5                 | 10.5                         | 32       | 53.5     | -        | -        |                              | DRV-CH27                         |
| ø22                   | 11.5                         | 33.5     | 55.5     | 77.5     | 99.5     |                              |                                  |
| ø22.5                 | 12.5                         | 35       | 57.5     | -        | -        |                              |                                  |
| ø23                   | 13.5                         | 36.5     | 59.5     | 82.5     | 105.5    |                              |                                  |
| ø23.5                 | 14.5                         | 38       | 61.5     | -        | -        |                              |                                  |
| ø24                   | 15.5                         | 39.5     | 63.5     | 87.5     | 111.5    |                              |                                  |
| ø24.5                 | 16.5                         | 41       | 65.5     | -        | -        |                              |                                  |
| ø25                   | 17.5                         | 42.5     | 67.5     | 92.5     | 117.5    |                              |                                  |
| ø25.5                 | 18.5                         | 44       | 69.5     | -        | -        |                              |                                  |
| ø26                   | 19.5                         | 45.5     | 71.5     | 97.5     | 123.5    |                              |                                  |
| ø26.5                 | -                            | 47       | -        | -        | -        |                              |                                  |
| ø27                   | 16.5                         | 43.5     | 75.5     | 97.5     | 124.5    |                              |                                  |

## Applicable Inserts


| Shape   |   | Description | Dimensions (mm) |      | MEGACOAT NANO | Applicable Chamfering Attachment |
|---|---|-------------|-----------------|------|---------------|----------------------------------|
|   |   |             | W1              | S    | PR1535        |                                  |
|  |  | CH0503-45   | 7.05            | 3.18 | ●             | DRV-CH ○○                        |

● : Standard Stock

## How to Install Chamfering Attachment

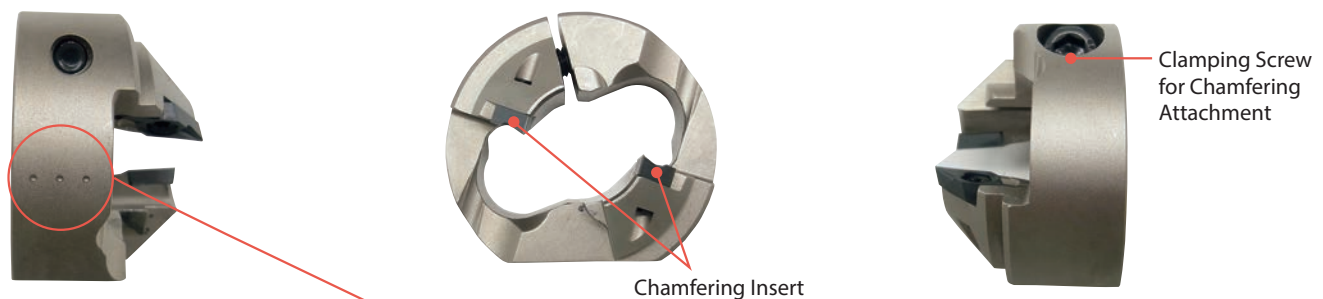

Identification on Inner Edge

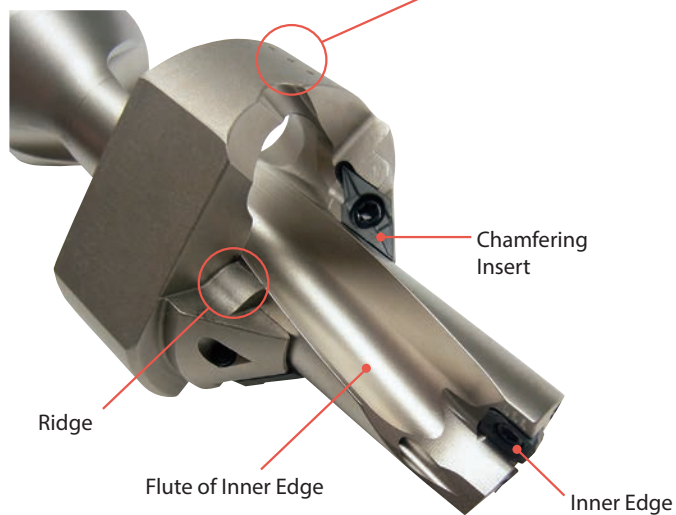

### Instructions

- 1) Install the attachment over the DRV body so that "• • •" mark on the side of the attachment aligns with the inside flute edge (see image).
- 2) Adjust the position to avoid interference between the chamfering inserts, chamfering attachment ridges, and drill body flutes. Then fasten the clamp screw with the recommended torque below.

### Recommended Torque

| Chamfering Attachment Description | Torque (N • m) | Clamping Screw | Wrench |
|-----------------------------------|----------------|----------------|--------|
| DRV-CH17 ~ CH26                   | 10             | HH6X18         | LW-5   |
| DRV-CH27                          | 14             | HH8X20         | LW-6   |

# Recommended Cutting Conditions (2D,3D,4D) ★ 1st Recommendation ☆ 2nd Recommendation

## ■ DRV Recommended Cutting Conditions (Wet)

| Workpiece                             | Recommended Insert Grade (Cutting Conditions Vc : m/min) |    |    |    |                    |    |    |    |        |    | Cutting Dia.<br>DC<br>(mm) | Holder Type (Drilling Depth) |             |             |             | Holder Type (Drilling Depth) |             |             |             |
|---------------------------------------|--|----|----|----|--------------------|----|----|----|--------|----|----------------------------|------------------------------|-------------|-------------|-------------|------------------------------|-------------|-------------|-------------|
|                                       | PVD Coated Carbide                                       |    |    |    | CVD Coated Carbide |    |    |    |        |    |                            | 2D,3D                        |             |             |             | 4D                           |             |             |             |
|                                       | PR1225   |    |    |    | CA520D             |    |    |    | CA415D |    |                            | f (mm/rev)                   |             |             |             | f (mm/rev)                   |             |             |             |
|                                       | GM   | GH | XM | SM | GM                 | GH | XM | SM | GM     | GH |                            | GM                           | GH          | XM          | SM          | GM                           | GH          | XM          | SM          |
| Low Carbon Steel<br>(SS400,S15C etc.) | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 012 - 013.5                | -                            | -           | -           | 0.04 - 0.06 | -                            | -           | -           | 0.04 - 0.06 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 014 - 015.5                | -                            | -           | 0.04 - 0.09 | 0.04 - 0.07 | -                            | -           | 0.04 - 0.08 | 0.04 - 0.07 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 016 - 018.5                | -                            | -           | 0.04 - 0.10 | 0.04 - 0.08 | -                            | -           | 0.04 - 0.08 | 0.04 - 0.08 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 019 - 022                  | -                            | -           | 0.04 - 0.12 | 0.04 - 0.08 | -                            | -           | 0.04 - 0.10 | 0.04 - 0.08 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 022.5 - 026                | -                            | -           | 0.04 - 0.14 | 0.06 - 0.10 | -                            | -           | 0.04 - 0.12 | 0.05 - 0.10 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 026.5 - 032                | -                            | -           | 0.06 - 0.14 | 0.06 - 0.10 | -                            | -           | 0.04 - 0.12 | 0.05 - 0.10 |
|                                       | -  | -  | ★  | ☆  | -                  | -  | ★  | ☆  | -      | -  | 033 - 039                  | -                            | -           | 0.06 - 0.14 | 0.06 - 0.10 | -                            | -           | 0.06 - 0.12 | 0.05 - 0.10 |
| Carbon Steel<br>(S45C etc.)           | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 012 - 013.5                | 0.04 - 0.14                  | 0.04 - 0.14 | -           | 0.04 - 0.10 | 0.04 - 0.10                  | 0.04 - 0.10 | -           | 0.04 - 0.08 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 014 - 015.5                | 0.04 - 0.14                  | 0.04 - 0.14 | 0.04 - 0.10 | 0.04 - 0.10 | 0.04 - 0.10                  | 0.04 - 0.10 | 0.04 - 0.08 | 0.04 - 0.08 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 016 - 018.5                | 0.06 - 0.16                  | 0.06 - 0.16 | 0.06 - 0.12 | 0.06 - 0.12 | 0.05 - 0.12                  | 0.05 - 0.12 | 0.04 - 0.10 | 0.05 - 0.10 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 019 - 026                  | 0.08 - 0.20                  | 0.08 - 0.20 | 0.06 - 0.14 | 0.06 - 0.14 | 0.07 - 0.16                  | 0.07 - 0.16 | 0.04 - 0.12 | 0.05 - 0.12 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 026.5 - 032                | 0.08 - 0.20                  | 0.08 - 0.20 | 0.06 - 0.14 | 0.06 - 0.14 | 0.07 - 0.16                  | 0.07 - 0.16 | 0.04 - 0.12 | 0.05 - 0.12 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 033 - 039                  | 0.08 - 0.20                  | 0.08 - 0.20 | 0.06 - 0.16 | 0.06 - 0.14 | 0.07 - 0.16                  | 0.07 - 0.16 | 0.06 - 0.14 | 0.05 - 0.12 |
|                                       | ★  | ☆  | ☆  | ☆  | ★                  | ☆  | ☆  | ☆  | -      | -  | 040 - 060                  | 0.08 - 0.20                  | 0.08 - 0.20 | 0.06 - 0.18 | 0.06 - 0.14 | 0.07 - 0.16                  | 0.07 - 0.16 | 0.06 - 0.16 | 0.05 - 0.12 |
| Alloy Steel<br>(SCM,SCr etc.)         | ★  | ☆  | ☆  | -  | ★                  | ☆  | ☆  | -  | -      | -  | 012 - 013.5                | 0.04 - 0.12                  | 0.04 - 0.12 | -           | -           | 0.04 - 0.10                  | 0.04 - 0.10 | -           | -           |
|                                       | ★  | ☆  | ☆  | -  | ★                  | ☆  | ☆  | -  | -      | -  | 014 - 015.5                | 0.04 - 0.14                  | 0.04 - 0.14 | -           | -           | 0.04 - 0.10                  | 0.04 - 0.10 | -           | -           |
|                                       | ★  | ☆  | ☆  | -  | ★                  | ☆  | ☆  | -  | -      | -  | 016 - 018.5                | 0.06 - 0.16                  | 0.06 - 0.16 | -           | -           | 0.05 - 0.12                  | 0.05 - 0.12 | -           | -           |
|                                       | ★  | ☆  | ☆  | -  | ★                  | ☆  | ☆  | -  | -      | -  | 019 - 039                  | 0.08 - 0.20                  | 0.08 - 0.20 | -           | -           | 0.07 - 0.16                  | 0.07 - 0.16 | -           | -           |
|                                       | ★  | ☆  | ☆  | -  | ★                  | ☆  | ☆  | -  | -      | -  | 040 - 060                  | 0.08 - 0.20                  | 0.08 - 0.20 | -           | -           | 0.07 - 0.16                  | 0.07 - 0.16 | -           | -           |
| Mold Steel<br>(SKD etc.)              | ☆  | ★  | -  | -  | ☆                  | ★  | -  | -  | -      | -  | 012 - 015.5                | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.04 - 0.07                  | 0.04 - 0.07 | -           | -           |
|                                       | ☆  | ★  | -  | -  | ☆                  | ★  | -  | -  | -      | -  | 016 - 018.5                | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.05 - 0.10                  | 0.05 - 0.10 | -           | -           |
|                                       | ☆  | ★  | -  | -  | ☆                  | ★  | -  | -  | -      | -  | 019 - 032                  | 0.08 - 0.15                  | 0.08 - 0.15 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |
|                                       | ☆  | ★  | -  | -  | ☆                  | ★  | -  | -  | -      | -  | 033 - 039                  | 0.08 - 0.15                  | 0.08 - 0.15 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |
|                                       | ☆  | ★  | -  | -  | ☆                  | ★  | -  | -  | -      | -  | 040 - 060                  | 0.08 - 0.15                  | 0.08 - 0.15 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |
| Stainless Steel<br>(Austenitic)       | -  | -  | -  | ★  | -                  | -  | -  | ★  | -      | -  | 012 - 015.5                | -                            | -           | -           | 0.04 - 0.10 | -                            | -           | -           | 0.04 - 0.08 |
|                                       | -  | -  | -  | ★  | -                  | -  | -  | ★  | -      | -  | 016 - 018.5                | -                            | -           | -           | 0.06 - 0.12 | -                            | -           | -           | 0.05 - 0.11 |
|                                       | -  | -  | -  | ★  | -                  | -  | -  | ★  | -      | -  | 019 - 060                  | -                            | -           | -           | 0.06 - 0.14 | -                            | -           | -           | 0.06 - 0.12 |
| Gray Cast Iron<br>(FC)                | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 012 - 013.5                | 0.08 - 0.14                  | 0.08 - 0.14 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 014 - 015.5                | 0.08 - 0.14                  | 0.08 - 0.14 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 016 - 018.5                | 0.08 - 0.18                  | 0.08 - 0.18 | -           | -           | 0.08 - 0.16                  | 0.08 - 0.16 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 019 - 039                  | 0.08 - 0.20                  | 0.08 - 0.20 | -           | -           | 0.08 - 0.18                  | 0.08 - 0.18 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 040 - 060                  | 0.08 - 0.20                  | 0.08 - 0.20 | -           | -           | 0.08 - 0.18                  | 0.08 - 0.18 | -           | -           |
| Nodular Cast Iron<br>(FCD)            | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 012 - 015.5                | 0.08 - 0.12                  | 0.08 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 016 - 018.5                | 0.08 - 0.16                  | 0.08 - 0.16 | -           | -           | 0.08 - 0.14                  | 0.08 - 0.14 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 019 - 039                  | 0.08 - 0.18                  | 0.08 - 0.18 | -           | -           | 0.08 - 0.16                  | 0.08 - 0.16 | -           | -           |
|                                       | ☆  | ★  | -  | -  | -                  | -  | -  | -  | ☆      | ★  | 040 - 060                  | 0.08 - 0.18                  | 0.08 - 0.18 | -           | -           | 0.08 - 0.16                  | 0.08 - 0.16 | -           | -           |

Internal Coolant is Recommended

# Recommended Cutting Conditions (5D,6D) ★1st Recommendation ☆2nd Recommendation

## ■ DRV Recommended Cutting Conditions (Wet)

| Workpiece                          | Recommended Insert Grade (Cutting Conditions Vc : m/min) |    |    |    |   |                    |    |    |    |   | Cutting Dia. DC (mm) | Holder Type (Drilling Depth) |             |             |             | Holder Type (Drilling Depth) |             |             |             |            |  |  |  |
|------------------------------------|--|----|----|----|---|--------------------|----|----|----|---|----------------------|------------------------------|-------------|-------------|-------------|------------------------------|-------------|-------------|-------------|------------|--|--|--|
|                                    | PVD Coated Carbide                                       |    |    |    |   | CVD Coated Carbide |    |    |    |   |                      | 5D                           |             |             |             | 6D                           |             |             |             |            |  |  |  |
|                                    | PR1225   |    |    |    |   | CA520D             |    |    |    |   |                      | CA415D                       |             |             |             | f (mm/rev)                   |             |             |             | f (mm/rev) |  |  |  |
|                                    | GM   | GH | XM | SM |   | GM                 | GH | XM | SM |   |                      | GM                           | GH          | XM          | SM          | GM                           | GH          | XM          | SM          |            |  |  |  |
| Low Carbon Steel (S5400,S15C etc.) | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø12 - ø13.5          | -                            | -           | -           | 0.03 - 0.05 | -                            | -           | -           | 0.03 - 0.05 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø14 - ø15.5          | -                            | -           | 0.04 - 0.07 | 0.04 - 0.06 | -                            | -           | 0.04 - 0.06 | 0.04 - 0.06 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø16 - ø18.5          | -                            | -           | 0.04 - 0.08 | 0.04 - 0.06 | -                            | -           | 0.04 - 0.06 | 0.04 - 0.06 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø19 - ø22            | -                            | -           | 0.04 - 0.10 | 0.04 - 0.07 | -                            | -           | 0.04 - 0.07 | 0.04 - 0.07 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø22.5 - ø26          | -                            | -           | 0.04 - 0.12 | 0.04 - 0.08 | -                            | -           | 0.04 - 0.08 | 0.04 - 0.07 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø26.5 - ø32          | -                            | -           | 0.04 - 0.12 | 0.04 - 0.08 | -                            | -           | 0.04 - 0.08 | 0.04 - 0.07 |            |  |  |  |
|                                    | -  | -  | ★  | ☆  | - | -                  | ★  | ☆  | -  | - | ø33 - ø39            | -                            | -           | 0.05 - 0.12 | 0.04 - 0.10 | -                            | -           | 0.04 - 0.09 | 0.04 - 0.08 |            |  |  |  |
| Carbon Steel (S45C etc.)           | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø12 - ø13.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | 0.04 - 0.07 | 0.03 - 0.05                  | 0.03 - 0.05 | -           | 0.03 - 0.05 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø14 - ø15.5          | 0.04 - 0.08                  | 0.04 - 0.08 | 0.04 - 0.07 | 0.04 - 0.07 | 0.04 - 0.06                  | 0.04 - 0.06 | 0.04 - 0.06 | 0.04 - 0.06 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø16 - ø18.5          | 0.05 - 0.10                  | 0.05 - 0.10 | 0.05 - 0.08 | 0.05 - 0.08 | 0.05 - 0.08                  | 0.05 - 0.08 | 0.05 - 0.07 | 0.05 - 0.07 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø19 - ø26            | 0.06 - 0.12                  | 0.06 - 0.12 | 0.05 - 0.10 | 0.05 - 0.10 | 0.06 - 0.10                  | 0.06 - 0.10 | 0.05 - 0.08 | 0.05 - 0.08 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø26.5 - ø32          | 0.06 - 0.12                  | 0.06 - 0.12 | 0.05 - 0.12 | 0.05 - 0.10 | 0.06 - 0.10                  | 0.06 - 0.10 | 0.05 - 0.08 | 0.05 - 0.08 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø33 - ø39            | 0.06 - 0.12                  | 0.06 - 0.12 | 0.05 - 0.12 | 0.05 - 0.10 | 0.06 - 0.10                  | 0.06 - 0.10 | 0.05 - 0.08 | 0.05 - 0.08 |            |  |  |  |
|                                    | ★  | ☆  | ☆  | ☆  | ★ | ☆                  | ☆  | ☆  | -  | - | ø40 - ø60            | 0.06 - 0.12                  | 0.06 - 0.12 | 0.06 - 0.12 | 0.05 - 0.10 | 0.06 - 0.10                  | 0.06 - 0.10 | 0.06 - 0.10 | 0.05 - 0.08 |            |  |  |  |
| Alloy Steel (SCM,Scr etc.)         | ★  | ☆  | ☆  | -  | ★ | ☆                  | ☆  | -  | -  | - | ø12 - ø13.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.03 - 0.05                  | 0.03 - 0.05 | -           | -           |            |  |  |  |
|                                    | ★  | ☆  | ☆  | -  | ★ | ☆                  | ☆  | -  | -  | - | ø14 - ø15.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.04 - 0.06                  | 0.04 - 0.06 | -           | -           |            |  |  |  |
|                                    | ★  | ☆  | ☆  | -  | ★ | ☆                  | ☆  | -  | -  | - | ø16 - ø18.5          | 0.05 - 0.10                  | 0.05 - 0.10 | -           | -           | 0.05 - 0.08                  | 0.05 - 0.08 | -           | -           |            |  |  |  |
|                                    | ★  | ☆  | ☆  | -  | ★ | ☆                  | ☆  | -  | -  | - | ø19 - ø39            | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |            |  |  |  |
|                                    | ★  | ☆  | ☆  | -  | ★ | ☆                  | ☆  | -  | -  | - | ø40 - ø60            | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |            |  |  |  |
| Mold Steel (SKD etc.)              | ☆  | ★  | -  | -  | ☆ | ★                  | -  | -  | -  | - | ø12 - ø13.5          | 0.04 - 0.06                  | 0.04 - 0.06 | -           | -           | 0.03 - 0.05                  | 0.03 - 0.05 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | ☆ | ★                  | -  | -  | -  | - | ø14 - ø15.5          | 0.04 - 0.06                  | 0.04 - 0.06 | -           | -           | 0.04 - 0.05                  | 0.04 - 0.05 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | ☆ | ★                  | -  | -  | -  | - | ø16 - ø18.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.04 - 0.06                  | 0.04 - 0.06 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | ☆ | ★                  | -  | -  | -  | - | ø19 - ø39            | 0.05 - 0.10                  | 0.05 - 0.10 | -           | -           | 0.05 - 0.08                  | 0.05 - 0.08 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | ☆ | ★                  | -  | -  | -  | - | ø40 - ø60            | 0.05 - 0.10                  | 0.05 - 0.10 | -           | -           | 0.05 - 0.08                  | 0.05 - 0.08 | -           | -           |            |  |  |  |
| Stainless Steel (Austenitic)       | -  | -  | -  | ★  | - | -                  | -  | ★  | -  | - | ø12 - ø13.5          | -                            | -           | -           | 0.04 - 0.08 | -                            | -           | -           | 0.03 - 0.05 |            |  |  |  |
|                                    | -  | -  | -  | ★  | - | -                  | -  | ★  | -  | - | ø14 - ø15.5          | -                            | -           | -           | 0.04 - 0.08 | -                            | -           | -           | 0.04 - 0.06 |            |  |  |  |
|                                    | -  | -  | -  | ★  | - | -                  | -  | ★  | -  | - | ø16 - ø18.5          | -                            | -           | -           | 0.04 - 0.10 | -                            | -           | -           | 0.04 - 0.09 |            |  |  |  |
|                                    | -  | -  | -  | ★  | - | -                  | -  | ★  | -  | - | ø19 - ø60            | -                            | -           | -           | 0.06 - 0.12 | -                            | -           | -           | 0.06 - 0.10 |            |  |  |  |
| Gray Cast Iron (FC)                | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø12 - ø15.5          | 0.04 - 0.10                  | 0.04 - 0.10 | -           | -           | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø16 - ø18.5          | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø19 - ø39            | 0.06 - 0.14                  | 0.06 - 0.14 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø40 - ø60            | 0.06 - 0.14                  | 0.06 - 0.14 | -           | -           | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           |            |  |  |  |
| Nodular Cast Iron (FCD)            | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø12 - ø13.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.03 - 0.05                  | 0.03 - 0.05 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø14 - ø15.5          | 0.04 - 0.08                  | 0.04 - 0.08 | -           | -           | 0.04 - 0.06                  | 0.04 - 0.06 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø16 - ø18.5          | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           | 0.06 - 0.08                  | 0.06 - 0.08 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø19 - ø39            | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |            |  |  |  |
|                                    | ☆  | ★  | -  | -  | - | -                  | -  | -  | ☆  | ★ | ø40 - ø60            | 0.06 - 0.12                  | 0.06 - 0.12 | -           | -           | 0.06 - 0.10                  | 0.06 - 0.10 | -           | -           |            |  |  |  |

Internal Coolant is Recommended

# Insert Grade Selection Guide

Select CVD for the outer edge when performing high speed and high efficiency machining. Machining for high efficiency, abrasion resistance and long tool life. Select PVD for the outer edge when for stable machining and a better surface finish.

PVD is recommended for the outer edge if chattering occurs or machining with lathe is not available even if cutting conditions are increased.

## 1st Recommendation (High Speed and High Efficiency Machining)

Outer Edge : CVD (CA520D/CA415D)



Inner Edge : PVD (PR1535)



## Stable Machining Oriented (1st Recommendation for Lathe Machining)

Outer Edge : PVD (PR1225)



Inner Edge : PVD (PR1535)



# Cutting Conditions by Application


| Application                | Plain Surface                            | Slant Surface   | Half Cylindrical | Hole Expansion | Pre-Drilled Surface                                   | Concave Surface   | Stacked Plates  |  |
|----------------------------|--|---|------------------|----------------|---|---|-----------------|--|
| Workpiece                  |  |   |                  |                |   |   |                 |  |
| Vc (m/min)                 | See recommended cutting conditions above | 120 (PVD insert is recommended for outer edge)          |                  |                |   |   |                 |  |
| f (mm/rev)                 | See recommended cutting conditions above | Half of the above recommended conditions is recommended |                  |                |   | Concave Surface : Half of the above recommended conditions is recommended | Not Recommended |  |
|                            |  |   |                  |                | Continuous : See recommended cutting conditions above |   |                 |  |
| Coolant (Internal Coolant) | Yes                                      |   |                  |                |   |   |                 |  |

# Shape of the Hole Bottom

| Chip Size | DC   | A    | Chip Size | DC   | A   | Chip Size | DC   | A   | Chip Size | DC   | A    | Chip Size | DC   | A    |      |      |
|-----------|------|------|-----------|------|-----|-----------|------|-----|-----------|------|------|-----------|------|------|------|------|
| 03        | 12.0 | 0.70 | 06        | 19.0 | 1.2 | 07        | 22.5 | 1.2 | 09        | 26.5 | 1.2  | 14        | 40.0 | 1.9  |      |      |
|           | 12.5 |      |           | 19.5 |     |           | 23.0 |     |           | 27.0 |      |           | 41.0 |      |      |      |
|           | 13.0 |      |           | 20.0 |     |           | 23.5 |     |           | 27.5 |      |           | 42.0 |      |      |      |
|           | 13.5 |      |           | 20.5 |     |           | 24.0 |     |           | 28.0 |      |           | 43.0 |      |      |      |
| 04        | 14.0 | 1.0  | 06        | 21.0 | 1.3 | 07        | 24.5 | 1.3 | 09        | 28.5 | 1.3  | 14        | 44.0 | 2.0  |      |      |
|           | 14.5 |      |           | 21.5 |     |           | 25.0 |     |           | 29.0 |      |           | 45.0 |      |      |      |
|           | 15.0 |      |           | 22.0 |     |           | 25.5 |     |           | 29.5 |      |           | 46.0 |      |      |      |
|           | 15.5 |      |           | 26.0 |     |           | 30.0 |     |           | 30.0 |      |           | 47.0 |      |      |      |
| 05        | 16.0 | 1.1  | 06        | 1.3  | 07  | 1.3       | 09   | 1.3 | 11        | 30.5 | 1.4  | 17        | 48.0 | 2.2  |      |      |
|           | 16.5 |      |           |      |     |           |      |     |           | 31.0 |      |           | 31.0 |      | 49.0 |      |
|           | 17.0 |      |           |      |     |           |      |     |           | 31.5 |      |           | 31.5 |      | 50.0 |      |
|           | 17.5 | 32.0 |           |      |     |           |      |     |           | 32.0 | 51.0 |           | 2.1  |      |      |      |
|           | 18.0 | 33.0 |           |      |     |           |      |     |           | 33.0 | 52.0 |           |      |      |      |      |
|           | 18.5 | 34.0 |           |      |     |           |      |     |           | 34.0 | 53.0 |           |      |      |      |      |
| 05        | 1.2  | 06   | 1.3       | 07   | 1.3 | 09        | 1.3  | 11  | 11        | 35.0 | 1.5  | 17        | 54.0 | 2.1  |      |      |
|           |      |      |           |      |     |           |      |     |           | 36.0 |      |           | 35.0 |      | 35.0 | 55.0 |
|           |      |      |           |      |     |           |      |     |           | 37.0 |      |           | 36.0 |      | 36.0 | 56.0 |
|           |      |      |           |      |     |           |      |     |           | 38.0 | 37.0 |           | 37.0 | 57.0 | 2.2  |      |
|           |      |      |           |      |     |           |      |     |           | 39.0 | 38.0 |           | 38.0 | 58.0 |      |      |
|           |      |      |           |      |     |           |      |     |           | 39.0 | 39.0 |           | 39.0 | 59.0 |      |      |
|           |      |      |           |      |     |           |      |     |           |      |      | 60.0      | 2.4  |      |      |      |


Common for 2D, 3D, 4D, 5D and 6D drills.  
 \* The above values are estimate values.  
 (Varies by approximately ±0.1 mm depending on workpiece and cutting conditions, etc.)

# Cautions for Machining



In case of through-hole machining, disc may be generated and ejected outward when drilling a hole. Be sure to install covers to protect against dangers if using a machine without the covers including general-purpose lathes, etc.

# Adjustable Sleeve (Cutting Dia./Center Height Adjustment)

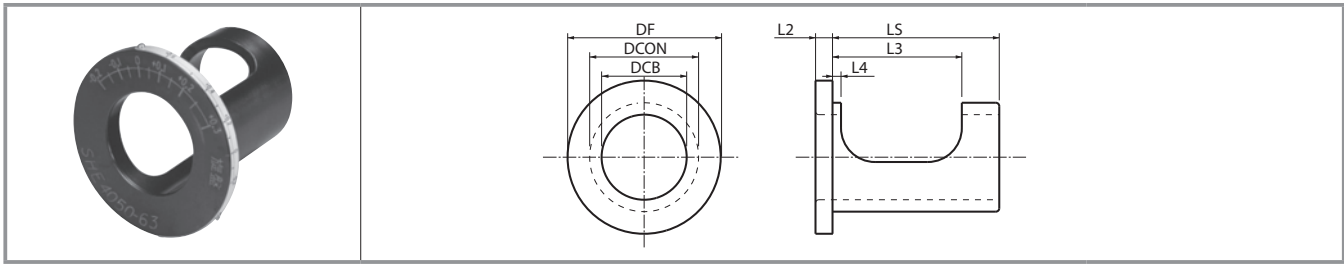


## Sleeve Dimensions

| Description | Stock | Dimensions (mm) |      |    |    |    |    |     |             | Dia. Adjustment Range* | Center Height Adjustment Range |
|-------------|-------|-----------------|------|----|----|----|----|-----|-------------|------------------------|--------------------------------|
|             |       | DCB             | DCON | DF | LS | L2 | L3 | L4  |             |                        |                                |
| SHE 2025-43 | ●     | 20              | 25   | 41 | 43 | 4  | 36 | 3.0 | +0.4 ~ -0.2 | +0.2 ~ -0.15           |                                |
| 2532-48     | ●     | 25              | 32   | 49 | 48 | 6  | 38 | 2.5 | +0.4 ~ -0.2 | +0.2 ~ -0.15           |                                |
| 3240-53     | ●     | 32              | 40   | 58 | 53 | 6  | 43 | 2.5 | +0.4 ~ -0.2 | +0.2 ~ -0.15           |                                |
| 4050-63     | ●     | 40              | 50   | 74 | 63 | 6  | 49 | 3.0 | +0.6 ~ -0.2 | +0.2 ~ -0.2            |                                |

\* Dia. Adjustment Range refers to the cutting diameter.

● : Standard Stock


### 1 Diameter Adjustment ~ For Machining Center ~



#### ■ Diameter Adjustment Range(mm)

| Shank Dia. | Adjustment Range |
|------------|------------------|
| ø20        | +0.4 ~ -0.2      |
| ø25        |                  |
| ø32        | +0.6 ~ -0.2      |
| ø40        |                  |

### 2 Center Height Adjustment ~ Fewer height adjustment problems for lathes ~



#### ■ Center Height Adjustment Range(mm)

| Shank Dia. | Adjustment Range |
|------------|------------------|
| ø20        | +0.2 ~ -0.15     |
| ø25        |                  |
| ø32        | +0.3 ~ -0.2      |
| ø40        |                  |

## How to Use


### 1 Hole Diameter Adjustment when Drilling

- Align the scale at the flange periphery of the sleeve to the center of the coolant plug of the drill.(Fig.1)
- When making the hole diameter bigger, rotate the sleeve in the (+) direction and to make it smaller, rotate the sleeve in the (-) direction.
- When rotating the sleeve, insert the wrench supplied with the drill into the hole on the flange periphery to rotate the sleeve.
- Using the bottom screw of the side-lock arbor, firmly tighten the drill directly through the sleeve's window.

The upper screw should be tightened slightly so that the sleeve will not be damaged.

Caution)

- Not for use with collet chuck type arbor.
- Check the actual cutting diameter after adjusting

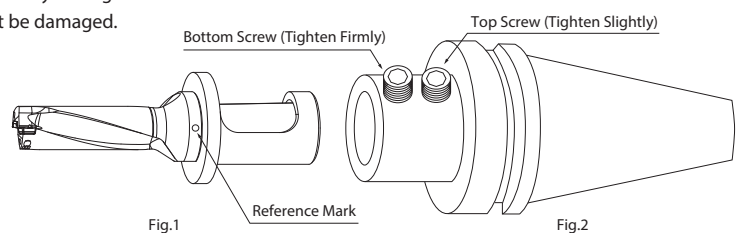


### 2 Center-Height Adjustment for Lathes

Most of the problems encountered with a turning lathe are center-height deviations. The center height is appropriate if a core of about 0.5mm diameter remains at the center of the hole. Center-height adjustment is necessary when no core remains or if the core diameter is more than 1mm.

- Align the drill with the outer insert face parallel to the X-axis of the tool turret. (Fig.4)
- Align the scale (for the lathe) on the flange face of the sleeve to the center of the reference mark.
- When no core remains, rotate the sleeve in the (+) direction to make the core larger, and when the core diameter is more than 1mm, rotate the sleeve in the (-) direction to make the core smaller.
- When rotating the sleeve, insert the wrench supplied with the drill into the hole of the flange and then rotate the sleeve.
- After Completing the adjustment, tighten the drill directly through the window on the sleeve.

Caution)

Depending on amount of the center height adjustment, the hole diameter may change. It is recommended that the hole diameter is checked after the center height adjustment.

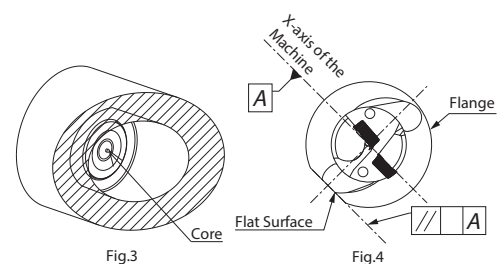

# Lathe Installation

1. The top face of the outer insert should be parallel to the X-axis to allow for offset cutting.  
(Cutting diameter can be changed by moving X-axis.)
2. It is recommended to set the outer insert as shown in Fig.1 with the outer insert facing the operator. (Fig.1)  
(It is also possible to use it by setting it in 180° reverse position)  
If the lathe has two turrets, when installing the drill into the lower turret, the outer insert should be set to face the operator.  
(It is also possible to use it by setting at 180° reverse position)

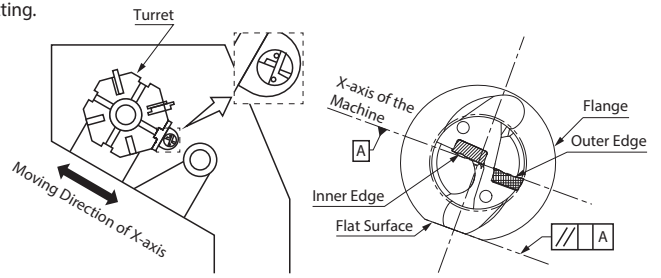


Fig.1 Installed into the Lathe

# Cutting Diameter Adjustment

## 1 Cutting Diameter Adjustment

1. Cutting diameter is adjusted by moving X-axis.  
The moving direction of the X-axis depends on the position of the toolholder.
2. For making the hole diameter larger, slide the tool along the X-axis toward the outer insert side. (Fig.2, Fig.3)  
For making the hole diameter smaller, slide the tool along the X-axis in the opposite direction.  
(This movement of the axis is called "Offset")  
Be sure not to make the hole diameter smaller than the drill diameter by 0.2mm or more. Otherwise, the toolholder will interfere with the drilled hole. (Fig.4)

Ex.) When using  $\phi 20$  drill, the hole diameter must not be smaller than 19.8mm

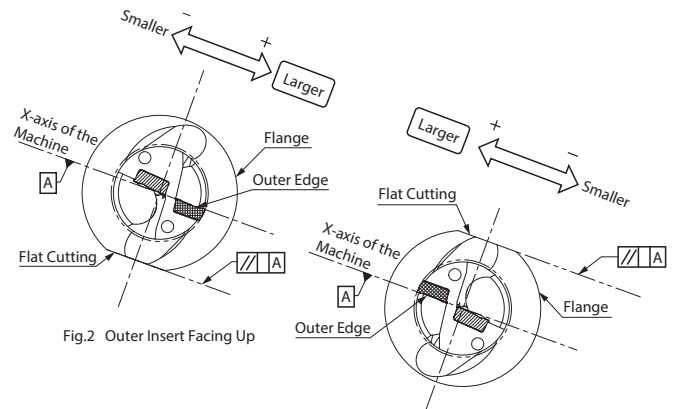


Fig.2 Outer Insert Facing Up

Fig.3 Outer Insert Facing Down

## 2 Offset Limit of the Cutting Diameter

- For the maximum limit of the cutting diameter, refer to "Max. Offset (Radial)" in the Toolholder Dimensions table.  
(The figure in the Toolholder Dimensions table shows how much it is possible to offset the drill in the radial direction.)  
Ex.) When using  $\phi 20$  drill, for example, it is possible to make a hole up to  $\phi 21.1$  since "Max. Offset (Radial)" is +0.55mm.

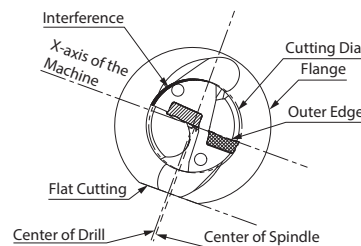


Fig.4 Excessive Offset (For Smaller Hole Diameter)

# Center Height Adjustment

## 1 Center Height of the Inner Insert

- When installing inner insert as shown in Fig.1, it will be set around 0.05mm below the Center of Spindle. (Fig.5)  
This is the normal position of the center height.  
However, in case that the turret of the lathe is out of the Center of Spindle, sometimes the inner insert may be set above or below the center.  
For stable machining, it is essential to check the Center Height carefully




Fig.5 Front View of the Drill

## 2 How to Check the Center Height

- For checking the center height of the inner insert, see the core which remains at the center of the bottom of the drilled hole.  
If the center height is in the normal position, a core about 0.5mm in diameter, will remain after machining. (Fig.6)  
Adjustment of center height is required if a large core diameter of 1 mm or more remains.  
\* The drilled hole for verification purposes needs to be machined at approximately 10 mm in depth and at a feed rate of 0.1 mm/rev or lower.




Fig.6 Center Core

### 3 Center Height Adjustment

#### 1. When there are no remaining cores and the vicinity of the drill center of the inner edge is damaged

This happens when the inner insert is set above the center height.(Fig.7)

| How to Adjust  |
|--|
| <p>A. Install the drill rotated by 180°<br/>Most problems will be solved by this method(Fig.8)</p>   |
| <p>B. If the core diameter becomes too large after the above adjustment, install the drill by rotating 90° counter-clockwise as shown in Fig.9 (outer edge is positioned lower) and adjust the center height by moving the tool in the X-axis direction.<br/>(However, this will make it impossible to adjust the cutting diameter)<br/>Caution: When installing the drill in the opposite direction (outer insert is positioned above), the cutting diameter will become smaller, which may cause the drill body to interfere with the drilled hole.<br/>The best solution is to readjust the center position of the turret itself.</p> |




Fig.7 Insert breakage near the center of the drill

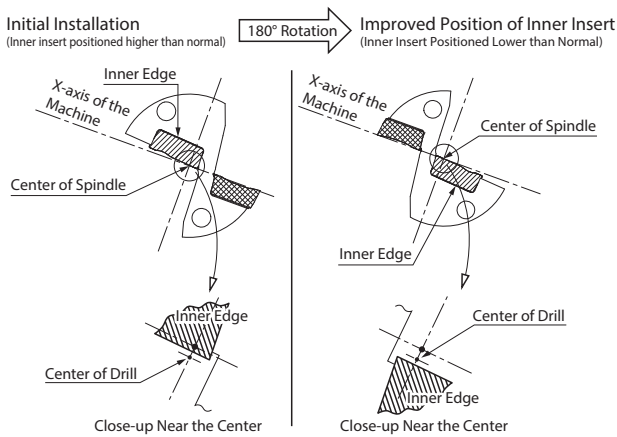


Fig.8

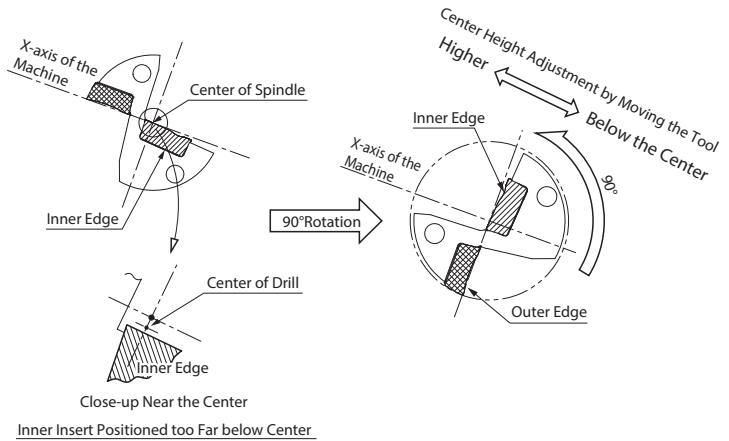


Fig.9

#### 2. Core with Excessively Large Diameter (More than 1mm)

This occurs when the inner insert is excessively below the center  
This condition causes poor chip evacuation and an adjustment is required.

| How to Adjust   |
|---|
| <p>Install the drill rotating 90° as shown in Fig.10. (outer insert is positioned on the upper side) and adjust the center height by moving tool in the X-axis direction.<br/>(However, this will make it impossible to adjust the cutting diameter)<br/>Caution: When installing the drill in the opposite direction (outer insert is positioned lower), the cutting diameter will become smaller, which may cause the drill body to interfere with the drilled hole.<br/>The best solution is to readjust the center position of the turret itself.</p> |

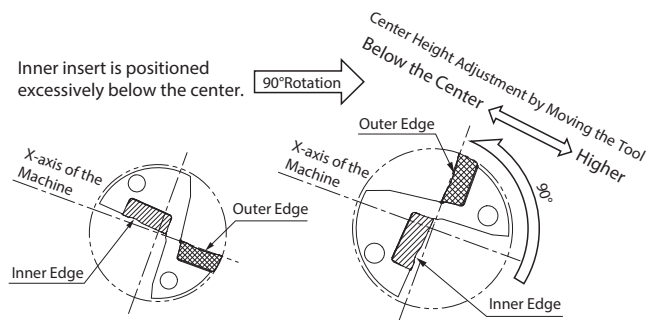


Fig.10