

New 45° General Purpose Milling Series

# MB45

**NEW**

**Extremely versatile, high performance, high quality, and long tool life milling**

Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts, and provides excellent surface finish

Next-generation PVD coating for milling PR18 Series

Economical milling with double-sided 8-edge inserts

Extended lineup of inserts and grades

Supports a wide variety of machining applications, including steel, stainless steel, cast iron, aluminum alloys, and heat-resistant alloys

Innovative new holder design



# MB45

Provides high quality and high performance machining solutions with long tool life  
Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts, and provides excellent surface finish

## Extreme versatility


General-purpose milling cutters require a balance between high-quality, high-performance, long tool life, economy, and versatility to be able to tackle a wide variety of machining applications

Pursue all of these qualities without compromising with the MB45

These next-generation cutters will last, whether you are running general machining applications, or finding valuable new machining solutions




01



ISO Standard  
SEKN Type  
(No breaker)

02




Positive (Single-sided)  
Type

**Advantage**

- Low cutting force
- Excellent finished surface and machining accuracy

03




Negative (Double-sided)  
Type

**Advantage**

- Excellent fracture resistance
- Economical with multiple cutting edges

## Evolving to standardize new technology

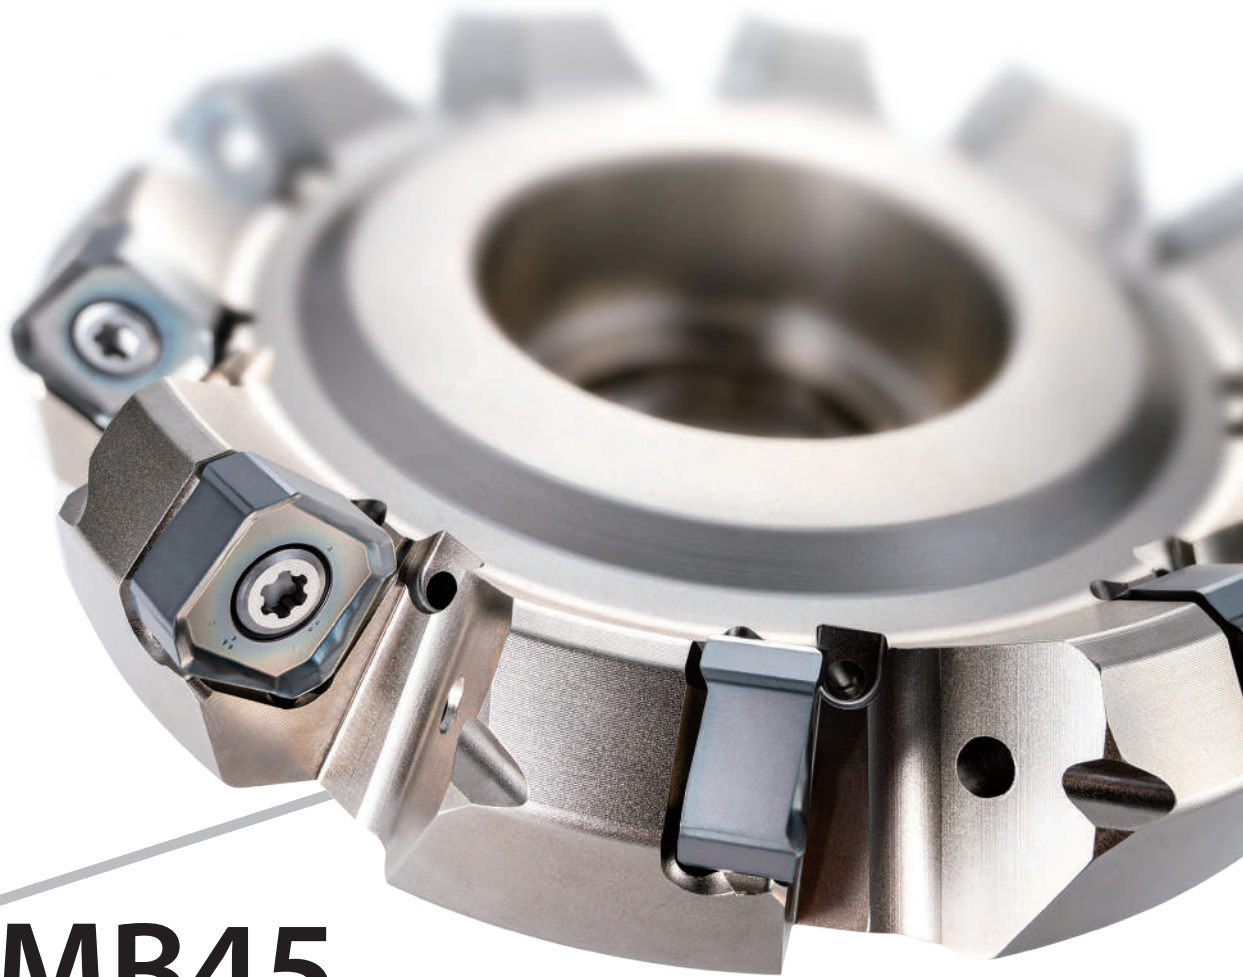

# 04 MB45

Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts

## High Quality

High quality results and excellent surface finish

- Lineup of E class inserts
- Long arc wiper edge
- Back coolant hole

## High Performance

Unique design with high performance, low cutting force and fracture resistance

- Double edge structure and helical cutting edge (A.R. max + 13°)

## Long Tool Life

Next-generation PVD coating for milling PR18 Series

**NEW**

- Double lamination technology maintains longer tool life
- Double-sided 8-edge design reduces tool costs

## Solution

Find new value with excellent versatility

- Integrated tooling: Roughing and finishing with E class inserts
- For a wide variety of machining applications: Small machines (BT30, etc.) with  $\varnothing 40\text{mm}$  cutter
- For a variety of workpieces: Cost-cutting with multiple cutting edges for aluminum machining
- Enhanced Quality: Gain excellent surface finish with Cermet inserts (TN620M)

# 1 "Versatility" + "Quality" Large insert lineup Supports a wide variety of machining applications

Five types of inserts for various machining applications


Economical inserts with 8 cutting edges

General purpose GM insert with E-Class and M-Class options based on required machining accuracy


Video




## Low cutting force **SM** (E-Class)




Sharpness oriented with a low cutting force design  
-10% cutting resistance compared to general purpose GM insert  
Recommended for small machines (BT30)

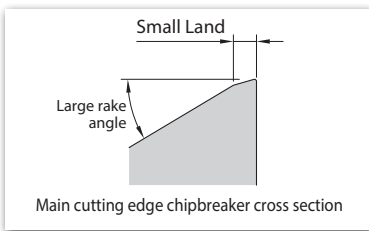


## General **GM** (E-Class / M-Class)




1st recommendation for steel machining  
Low cutting force and fracture resistance  
E-Class or M-Class selectable

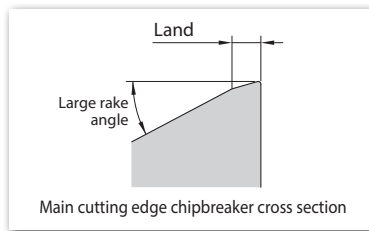

## Tough Edge **GH** (M-Class)




Tough cutting edge and excellent fracture resistance  
Obtuse edge design is resistant to chipping  
Recommended for intermittent machining

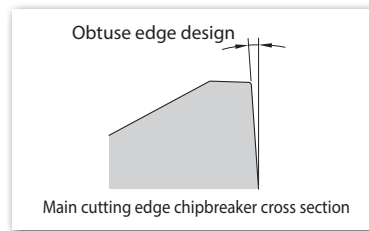

## Wiper Insert **W** (E-Class)



Ultra-long wiper edge (Wiper edge length approx. 8 mm)





\* Double-sided  
2-edge insert

## **AM** for Aluminum Alloys

No Land + Sharp Edge Specifications  
Excellent sharpness



### Applicable Insert Range

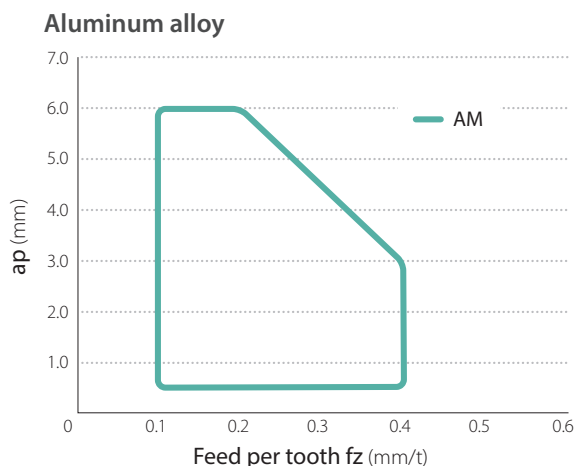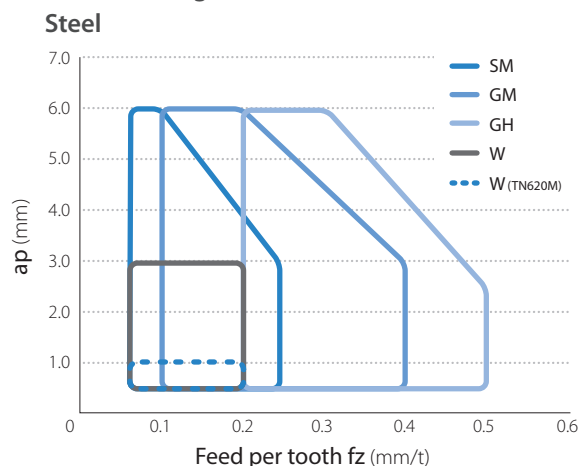

## When to use GM (Class E/M)


### Selection by machining application

Surface finish oriented:

GM (E-Class)

Cost-effective and surface finish oriented: GM (M-Class)

Efficiency and surface roughness oriented: W (E-Class)



Criteria	GM (E-Class)	GM (M-Class)	W (E-Class) *Wiper
Tolerance	Inscribed Circle Tolerance ±0.013mm	Inscribed Circle Tolerance ±0.05mm	Inscribed Circle Tolerance ±0.013mm
Surface finish	○ Approx. 1.6µmRa	△ Approx. 3.2µmRa	⊙ Approx. 0.8µmRa or less
(Gloss)	(○)	(⊙)	(⊙)
Machining efficiency	○	○	⊙
Economy	○	⊙	△

\*Surface finish is based on internal assessment and varies depending on the machining environment

## Solution

### Tool integration for roughing and finishing with E-Class insert


#### MB45

**Tool integration for roughing and finishing**  
Reduced tool management and inventory costs

Video



Roughing  $ap = 2.5 \text{ mm}$

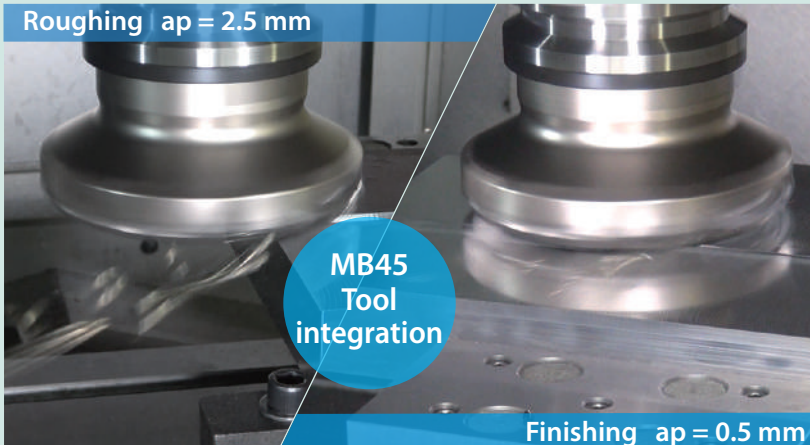

Finishing  $ap = 0.5 \text{ mm}$

#### Chip condition

Good chips in both roughing and finishing

Roughing




Finishing



Cutting Conditions:  $\phi 125$  (10 inserts) GM (E-Class) Dry Workpiece: S50C  
Roughing:  $V_c = 200 \text{ m/min}$ ,  $ap \times ae = 2.5 \times 85 \text{ mm}$ ,  $fz = 0.20 \text{ mm/t}$   
Finishing:  $V_c = 250 \text{ m/min}$ ,  $ap \times ae = 0.5 \times 85 \text{ mm}$ ,  $fz = 0.15 \text{ mm/t}$


#### Finished surface condition

Excellent surface finish

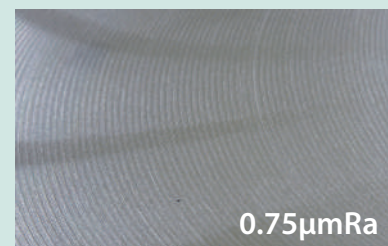

#### Conventional machining

Tool replacement is needed when roughing and finishing



+



(Internal evaluation)

2

“Versatility” + “Long tool life” Large lineup of insert grades  
Steel, stainless steel, cast iron, heat-resistant alloys to aluminum alloy machining

For steel, stainless steel and cast iron

## PR1825/PR1835/PR1810 New development MEGACOAT NANO EX

<b>PR1825</b>	<b>P</b>	<b>PR1835</b>	<b>M</b>	<b>PR1810</b>	<b>K</b>
For Steel (Wear resistance oriented)		For Steel (Stability oriented) 1st Recommendation for stainless steel		For Cast iron	

Workpiece	P Steel					M Stainless steel					K Cast iron				
	01	10	20	30	40	01	10	20	30	40	01	10	20	30	40
ISO															
Grade		Wear resistance oriented <b>PR1825</b>					1st Recommendation <b>PR1835</b>					1st Recommendation <b>PR1810</b>			
		Stability oriented <b>PR1835</b>													

For hardened material

**PR015S** MEGACOAT HARD  
PVD coating

For steel Surface finish oriented

**TN620M** Cermet

For stainless steel and heat-resistant alloys

**CA6535** CVD coating

For aluminum machining

**PDL025** DLC coating  
**GW25** Non-coated Carbide

Next-generation PVD coating for milling

# PR18 Series

Kyocera's Nano Layer Coating Technology  
Longer Tool Life with Next-generation Coating for Milling



**Double lamination technology with special nano layer**

**Double Lamination Technology Maintains Longer Tool Life**  
Multi-layer structure with two unique nano layers  
Superior abrasion resistance and fracture resistance

Nano-Layer  
Suppresses crack growth  
High toughness

Nano-Layer  
Suppresses crack growth  
High toughness

**AlCr-based coating**  
with excellent abrasion resistance


**AlTi-based coating**  
with excellent heat resistance

**Multi-layering of high-performance nano layers**  
Increases toughness with the suppression of crack growth and optimization of internal stress

CG Image


Coating characteristics (Internal evaluation)

# MEGACOAT NANO EX | Milling |

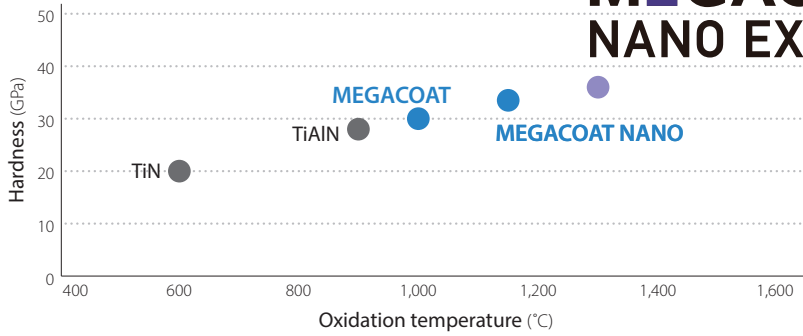


PR1825 with PVD coating MEGACOAT NANO EX provides long tool life

Wear resistance comparison (Internal evaluation)

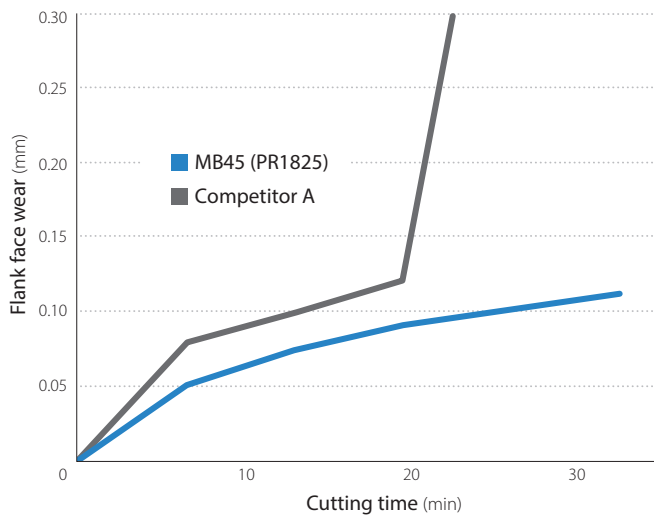

Cutting edge condition (after 20 min machining)

MB45(PR1825)

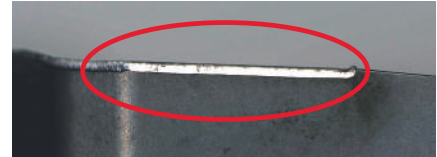


Competitor A



Cutting Conditions:  $V_c = 120$  m/min,  $a_p = 2.0$  mm,  $a_e/DC = 80\%$ ,  $f_z = 0.20$  mm/t, Dry  
Workpiece: SKD11,  $\phi 125$  BT50




## Solution Utilizing Cermet TN620M

Cermet (TN620M) for efficient finishing

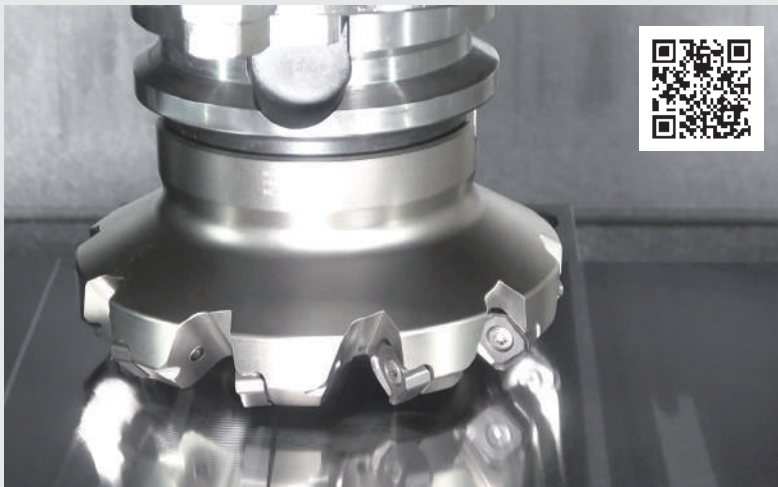

Surface finish condition (Internal evaluation)


Superior surface finish

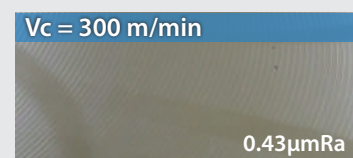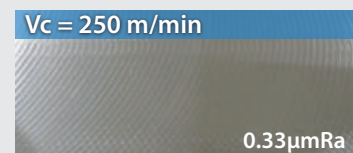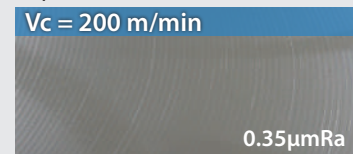

Cutting Conditions:  $a_p \times a_e = 0.5 \times 100$  mm  
 $f_z = 0.15$  mm/t, Dry  
Workpiece: S50C,  $\phi 125$  (10 inserts), GM (TN620M)

3


“Versatility” + “High Performance” New design utilizes unique technology  
 Low cutting force and excellent fracture resistance with excellent surface finish

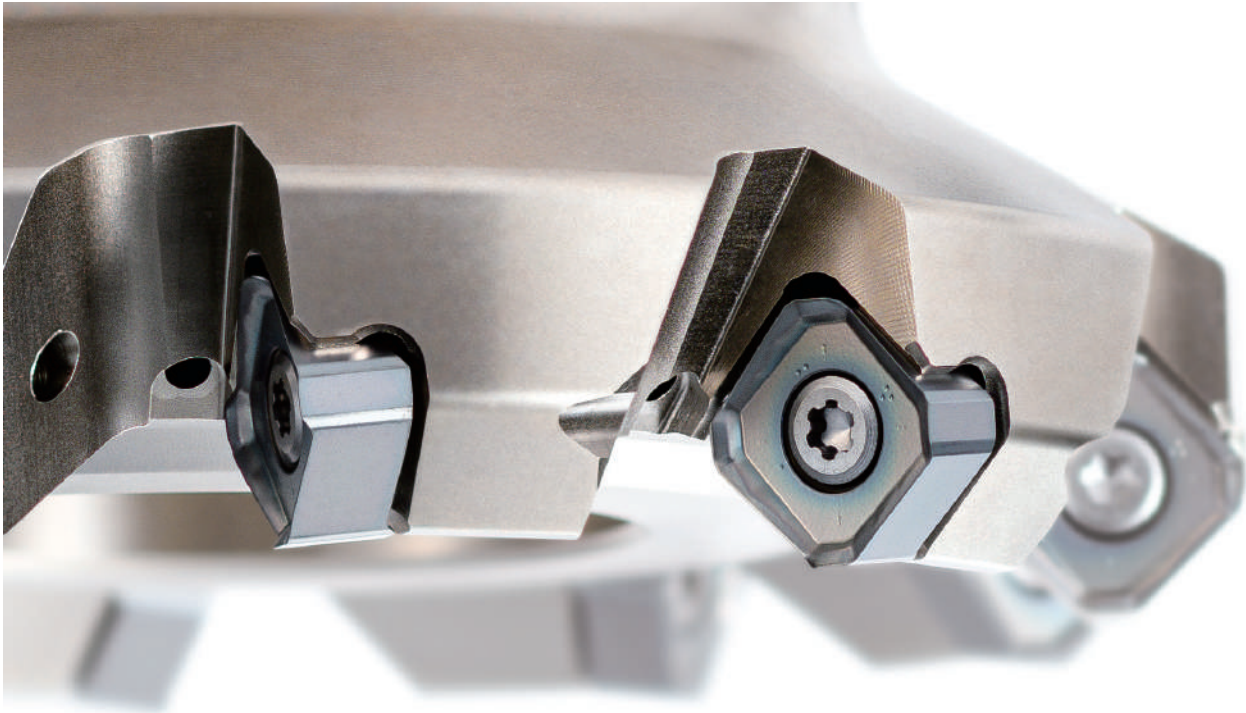

Low cutting force and excellent fracture resistance


Unique helical cutting edge and double-edge structure

**A unique helical cutting edge**

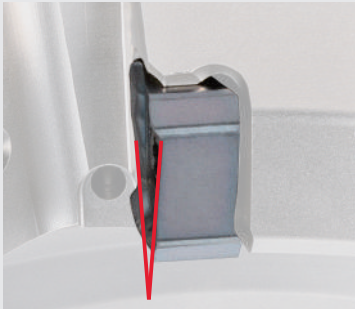


A.R. Ensures a maximum of 13° and suppresses chatter with low cutting force.

**Double edge structure**

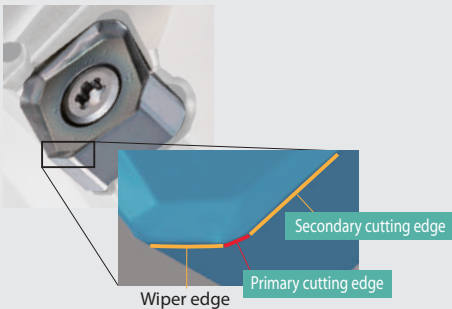


Primary cutting edge generates thin chips  
 Reduces impact load and greatly reduces vibration when exiting the part

**Cutting resistance comparison** (Internal evaluation)

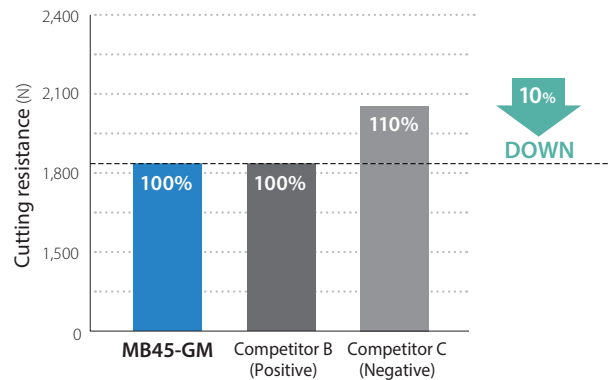

Cutting Conditions:  $V_c = 180$  m/min,  $a_p = 3.0$  mm,  $a_e/DC = 80\%$  Center Cut,  $f_z = 0.30$  mm/t, Workpiece: S50C

**Fracture resistance comparison** (Internal evaluation)  $f_z = 0.5\sim 0.8$  mm/t

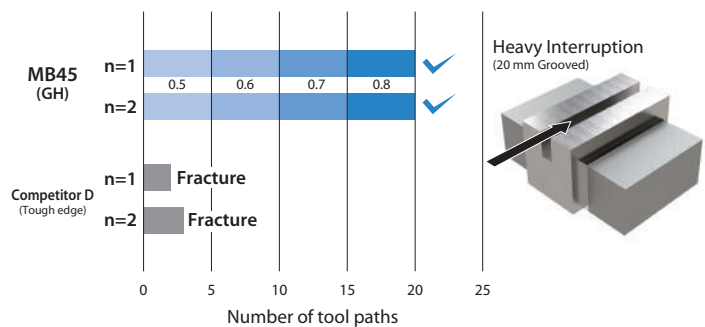

Cutting Conditions:  $V_c = 100$  m/min,  $a_p \times a_e = 2 \times 100$  mm Center Cut, BT50 Workpiece: SCM440HT  $\phi 125$  (10 inserts)




## High quality


## Long arc wiper edge utilizing unique technology

### Unique long arc wiper edge


Reduces variation in mounting accuracy and provides superior finished surface quality



Convex curved shape with wiper edge protruding upward  
\*GM/SM/AM (E-Class)




### Surface roughness comparison (Internal evaluation)

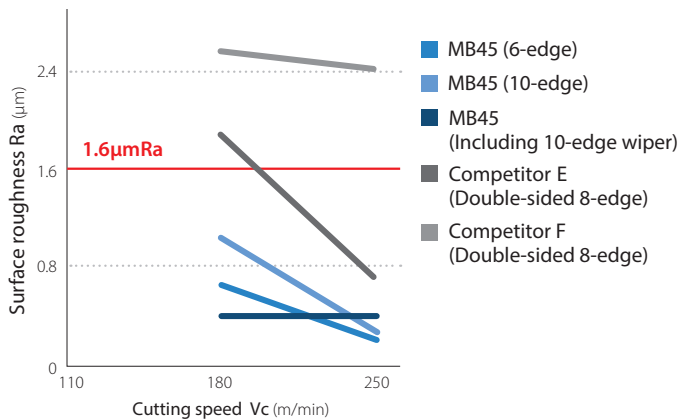

Cutting Conditions:  $a_p \times a_e = 1 \times 100$  mm (Center Cut),  $f_z = 0.20$  mm/t, Dry  
Workpiece: S50C  $\phi 125$  (6 inserts/10 inserts) GM (PR1825) BT50

### Finishing surface condition (Vc = 180 m/min)

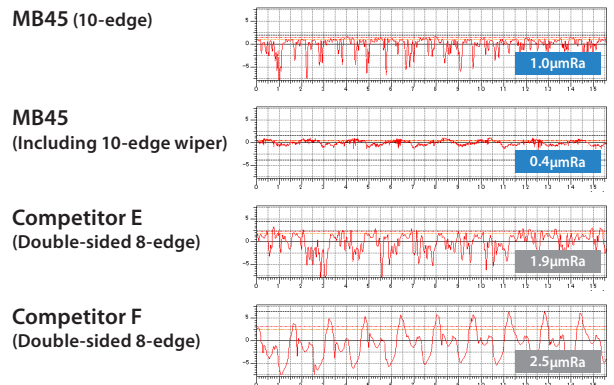

Proprietary long arc wiper edge provides excellent finishing surface quality

### Finishing surface quality comparison (Image)

#### MB45

##### Long arc wiper edge

Smooth finished surface with small feed joints

Workpiece

#### General insert

##### Straight wiper edge

The feed joint is large and the finished surface is stepped.

Workpiece

## Solution Unique back coolant structure delivers excellent finished surface.

Smooth chip evacuation reduces scratches and chip clogging on finished surfaces

Reliably supplies coolant to the cutting edge. Internal coolant allows for even higher quality surface finish

### Unique back coolant structure

#### Coolant hole



Mounted closer to the cutting edge than before  
Control chip outward for excellent chip evacuation to ensure to cool the cutting edge (up to  $\phi 125$ ).

#### Special grooves in the discharge port





The hole position is on the far side to prevent chip contact  
Improves deterioration of chip control and evacuation

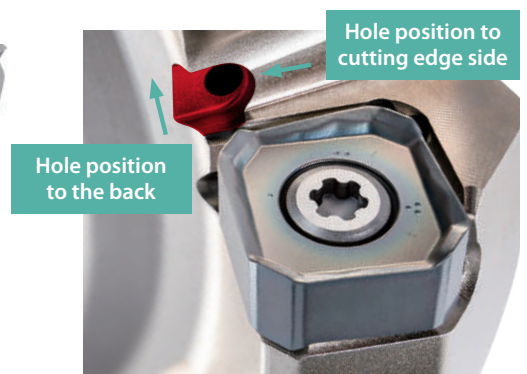
\* Due to shape restrictions, some toolholders do not have grooves in the discharge port.

Fluid analysis (image)



# Toolholder Lineup

Coarse pitch	Fine pitch	Extra fine pitch	Shank Type
			
Recommended for workpieces or machines with low rigidity (such as sheet machining or BT30) Economical	<u>1st recommendation</u> Good balance of stability, machining accuracy and efficiency Supports a wide range of machining areas	Recommended for high rigid workpiece and machine	Compatible with milling chucks (face mill recommended basically) *Shank size: ø32
Cutting diameter ø80 to ø315 (inch spec) Cutting diameter ø40 to ø315 (metrics) *ø315: Made to order	Cutting diameter ø80 to ø315 (inch spec) Cutting diameter ø40 to ø315 (metrics) *ø315: Made to order	Cutting diameter ø80 to ø250 (inch spec) Cutting diameter ø40 to ø250 (metrics)	Cutting diameter ø40 to ø80




## Compatible with smaller machines

Lineup of coarse pitch ø40  
Works well on small machines such as BT30

Recommendation for small machines:  
Low cutting force SM  
Cutting resistance is about 10% less than general-purpose GM

## Cutting resistance comparison (Internal evaluation)

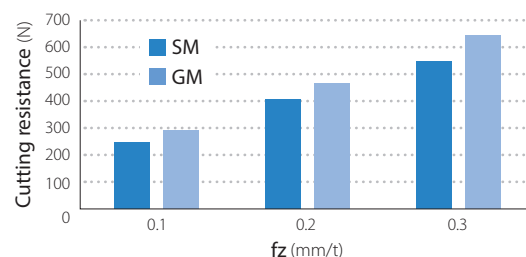


Cutting Conditions:  $V_c = 150$  m/min,  $a_p = 1.0$  mm,  $a_e/D_c = 80\%$ , Dry, BT50  
Workpiece: S50C



## Case studies

### Excellent performance even under unstable machining conditions

#### Cradle SS400



$V_c = 160$  m/min  
 $a_p \times a_e = 0.07 \times 1.30$  mm, Wet

#### Machining efficiency

**MB45** ø160 12 inserts  
GM(PR1825)

**$V_f = 760$  mm/min**

$f_z = 0.20$  mm/t

Competitor G ø160 8 inserts

**$V_f = 640$  mm/min**

$f_z = 0.25$  mm/t

Machining efficiency

1.2x


MB45 shows stable machining in an environment prone to deflection and chatter. Increasing the number of inserts improves efficiency. Highly rated for quiet machining  
Improved joints between machining passes

(User evaluation)

## Case studies

### Achieves 1.6x longer tool life under the same machining conditions

#### Housing SUS316



$V_c = 90$  m/min  
 $a_p = 2.0$  mm,  $f_z = 0.18$  mm/t, Dry

#### Number of parts

**MB45** ø63 5 inserts  
GM(PR1825)

**30 pcs per corner**

Competitor H ø63 5 inserts

**18 pcs per corner**

Tool life

1.6x

MB45 shows stable machining without chattering  
Wear on the cutting edge proceeds normally and shows 1.6x tool life than competitor.













(User evaluation)

# Recommended Cutting Conditions ★ 1st Recommendation ☆ 2nd Recommendation

Chipbreaker	Workpiece	Feed fz (mm/t) ( ):TN620M	Recommended Insert Grade (Vc: m/min)							
			MEGACOAT NANO EX (PVD coating)			MEGACOAT HARD (PVD coating)	CVD coating	Cermet	DLC coating	Carbide
			PR1835	PR1825	PR1810	PR015S	CA6535	TN620M	PDL025	GW25
General GM	Carbon Steel (SxxC)	0.1 - <b>0.2</b> - 0.4 (0.06 - <b>0.12</b> - 0.20)	☆ 120 - <b>180</b> - 250	★ 120 - <b>180</b> - 250	-	-	-	★ 200 - <b>250</b> - 300	-	-
	Alloy Steel (SCM, etc.)	0.1 - <b>0.2</b> - 0.4 (0.06 - <b>0.12</b> - 0.20)	☆ 100 - <b>160</b> - 220	★ 100 - <b>160</b> - 220	-	-	-	★ 180 - <b>220</b> - 250	-	-
	Mold steel (SKD, etc.)	0.1 - <b>0.2</b> - 0.35 (0.06 - <b>0.08</b> - 0.15)	☆ 80 - <b>140</b> - 180	★ 80 - <b>140</b> - 180	-	-	-	★ 150 - <b>180</b> - 220	-	-
	Austenitic stainless steel (SUS 304, etc.)	0.1 - <b>0.2</b> - 0.4	☆ 100 - <b>160</b> - 200	☆ 100 - <b>160</b> - 200	-	-	-	-	-	-
	Martensitic stainless steel (SUS 403, etc.)	0.1 - <b>0.2</b> - 0.4	☆ 150 - <b>200</b> - 250	-	-	-	☆ 180 - <b>240</b> - 300	-	-	-
	Precipitation hardening stainless steel (SUS 630, etc.)	0.1 - <b>0.2</b> - 0.3	★ 90 - <b>120</b> - 150	-	-	-	-	-	-	-
	Gray cast iron (FC)	0.1 - <b>0.2</b> - 0.4	-	-	★ 120 - <b>180</b> - 250	-	-	-	-	-
	Ductile cast iron (FCD)	0.1 - <b>0.2</b> - 0.35	-	-	★ 100 - <b>150</b> - 200	-	-	-	-	-
	Ni-based heat resistant alloys	0.1 - <b>0.12</b> - 0.2	☆ 20 - <b>30</b> - 50	-	-	-	★ 20 - <b>30</b> - 50	-	-	-
Low Cutting Force SM	Carbon Steel (SxxC)	0.06 - <b>0.12</b> - 0.25	☆ 120 - <b>180</b> - 250	☆ 120 - <b>180</b> - 250	-	-	-	-	-	-
	Alloy Steel (SCM, etc.)	0.06 - <b>0.12</b> - 0.25	☆ 100 - <b>160</b> - 220	☆ 100 - <b>160</b> - 220	-	-	-	-	-	-
	Mold steel (SKD, etc.)	0.06 - <b>0.1</b> - 0.2	☆ 80 - <b>140</b> - 180	☆ 80 - <b>140</b> - 180	-	-	-	-	-	-
	Austenitic stainless steel (SUS 304, etc.)	0.06 - <b>0.12</b> - 0.25	★ 100 - <b>160</b> - 200	☆ 100 - <b>160</b> - 200	-	-	-	-	-	-
	Martensitic stainless steel (SUS 403, etc.)	0.06 - <b>0.12</b> - 0.25	☆ 150 - <b>200</b> - 250	-	-	-	★ 180 - <b>240</b> - 300	-	-	-
	Precipitation hardening stainless steel (SUS 630, etc.)	0.06 - <b>0.12</b> - 0.25	☆ 90 - <b>120</b> - 150	-	-	-	-	-	-	-
	Gray cast iron (FC)	0.06 - <b>0.12</b> - 0.25	-	-	☆ 120 - <b>180</b> - 250	-	-	-	-	-
	Ductile cast iron (FCD)	0.06 - <b>0.1</b> - 0.2	-	-	☆ 100 - <b>150</b> - 200	-	-	-	-	-
	Ni-based heat resistant alloys	0.06 - <b>0.1</b> - 0.15	☆ 20 - <b>30</b> - 50	-	-	-	☆ 20 - <b>30</b> - 50	-	-	-
	Titanium alloy (Ti-6Al-4V)	0.06 - <b>0.08</b> - 0.15	★ 40 - <b>60</b> - 80	-	-	-	-	-	-	-
Tough Edge GH	Carbon Steel (SxxC)	0.2 - <b>0.3</b> - 0.5	☆ 120 - <b>180</b> - 250	☆ 120 - <b>180</b> - 250	-	-	-	-	-	-
	Alloy Steel (SCM, etc.)	0.2 - <b>0.3</b> - 0.5	☆ 100 - <b>160</b> - 220	☆ 120 - <b>160</b> - 220	-	-	-	-	-	-
	Mold steel (SKD, etc.)	0.2 - <b>0.3</b> - 0.45	☆ 80 - <b>140</b> - 180	☆ 80 - <b>140</b> - 180	-	-	-	-	-	-
	Austenitic stainless steel (SUS 304, etc.)	0.2 - <b>0.3</b> - 0.4	☆ 100 - <b>160</b> - 200	☆ 100 - <b>160</b> - 200	-	-	-	-	-	-
	Martensitic stainless steel (SUS 403, etc.)	0.2 - <b>0.3</b> - 0.4	☆ 150 - <b>200</b> - 250	-	-	-	☆ 180 - <b>240</b> - 300	-	-	-
	Precipitation hardening stainless steel (SUS 630, etc.)	0.2 - <b>0.3</b> - 0.4	☆ 90 - <b>120</b> - 150	-	-	-	-	-	-	-
	Gray cast iron (FC)	0.2 - <b>0.3</b> - 0.5	-	-	☆ 120 - <b>180</b> - 250	-	-	-	-	-
	Ductile cast iron (FCD)	0.2 - <b>0.3</b> - 0.45	-	-	☆ 100 - <b>150</b> - 200	-	-	-	-	-
	Ni-based heat resistant alloys	0.1 - <b>0.2</b> - 0.3	☆ 20 - <b>30</b> - 50	-	-	-	☆ 20 - <b>30</b> - 50	-	-	-
	Hardened material (40 HRC or less)	0.05 - <b>0.1</b> - 0.2	-	-	-	★ 50 - <b>80</b> - 100	-	-	-	-
AM	Aluminum alloy	0.1 - <b>0.2</b> - 0.4	-	-	-	-	-	★ 200 - <b>600</b> - 900	☆ 200 - <b>500</b> - 800	-



The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation. Machining with coolant is recommended for Ni-based heat resistant alloy and titanium alloy. When choosing wet machining for other workpieces, reduce the cutting speed to 70% or less. When machining aluminum, be sure to use within recommended conditions. Do not rotate more than the maximum speed listed on the main unit. Dry machining is recommended for cermet.

# Applicable Inserts


Usage Classification	P	Steel	★	☆														
		Mold steel	★	☆														
★: Roughing/ 1st recommendation	M	Austenitic stainless steel	☆	★														
		Martensitic stainless steel		☆														
☆: Roughing/ 2nd recommendation	K	Gray cast iron																
		Ductile cast iron																
■: Finishing/ 1st recommendation	N	Nonferrous metal															★	☆
		Heat resistant alloys (Ni-based heat resistant alloys)																
□: Finishing/ 2nd recommendation (Hardened material is 40 HRC or less)	S	Titanium alloy																
		Hardened material																
Shape	Description	Dimensions (mm)						MEGACOAT NANO EX <span style="color:red">NEW</span>			MEGACOAT HARD	CVD coating	Cermet	DLC coating	Carbide			
		IC	S	BCH	BS	D1	INSL	PR1825	PR1835	PR1810	PR0155	CA6535	TN620M	PDL025	GW25			
 General Purpose (M-Class)		SNMU1406ANER-GM	14.7	6.07	0.8	2.3	5.8	●	●	●		●	●					
 Tough Edge (M-Class)		SNMU1406ANER-GH	14.7	5.89	1.4	1.7	5.8	●	●	●	●	●						
 General Purpose (E-Class)		SNEU1406ANER-GM	14.7	6.07	0.8	2.3	5.8	●	●	●		●	●					
 Low cutting force (E-Class)		SNEU1406ANER-SM	14.7	6.07	0.8	2.3	5.8	●	●			●						
 Aluminum and non-ferrous metals (E-Class)		SNEU1406ANFR-AM	14.7	6.07	0.8	2.3	5.8									●	●	
 Wiper Insert (E-Class 2-edge)		SNEU1406ANEN-W	14.7	6.15	1.1	8.8	5.8	19.4	●	●	●		●	●				

●: Standard Stock

## Applicable Chipbreaker Range

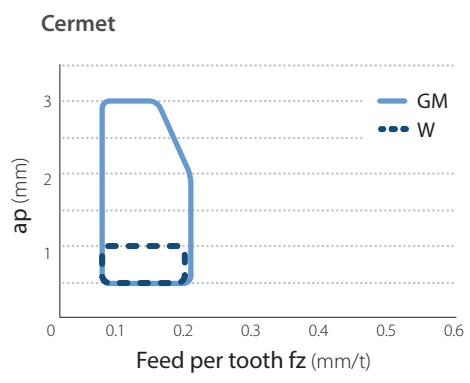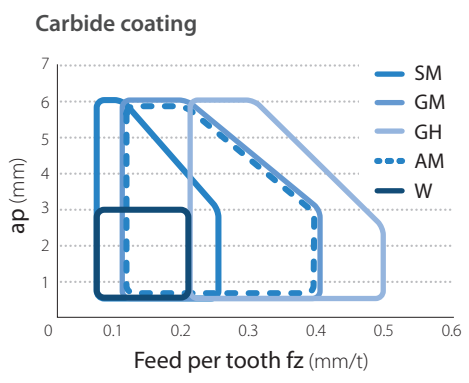

# MB45 Face mill

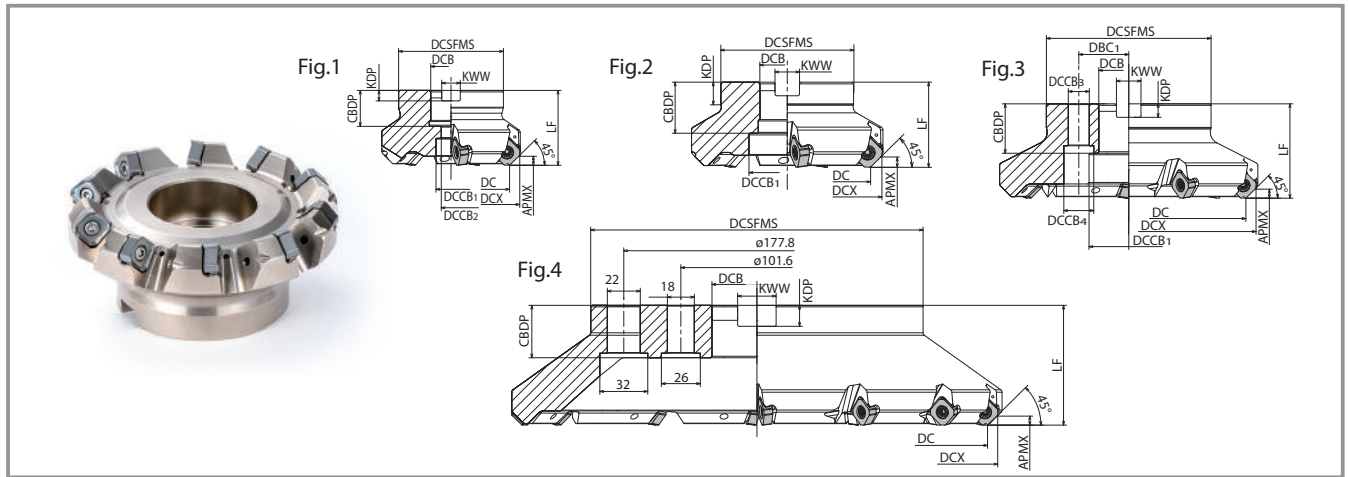

## Toolholder dimensions

Description		Stock	Number of inserts	Dimensions (mm)											A.R. max.(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min <sup>-1</sup> )	Shape		
				DC	DCX	DCSFMS	DCB	DCCB1	DCCB2	DCCB3	DCCB4	DBC1	LF	CBDP							KDP	KWW
Bore Dia. Inch spec.	Coarse Pitch	MB45 - 080R-14T5C	●	5	80	94	70	25.4	20	13	-	-	-	-	50	27	6	9.5	Yes	1.4	9,000	Fig.1
		100R-14T5C	●	5	100	114	78	31.75	45	-	-	-	-	34	8	12.7	2.0	8,000				
		125R-14T6C	●	6	125	139	89	38.1	55	-	-	-	-	-	-	10	15.9	3.3	7,200	Fig.2		
		160R-14T7	●	7	160	174	110	50.8	70	-	-	-	-	63	11	19.1	5.1	6,300				
		200R-14T8	●	8	200	214	140	47.625	110	18	26	101.6	-	38	14	25.4	7.6	5,700	Fig.3			
		250R-14T10	●	10	250	264	140	47.625	110	18	26	101.6	-	38	14	25.4	10.8	5,100				
	315R-14T14	MTO	14	315	329	222	-	-	-	-	-	-	80	-	-	20.4	4,500	Fig.4				
	Fine Pitch	MB45 - 080R-14T6C	●	6	80	94	70	25.4	20	13	-	-	-	-	50	27	6	9.5	Yes	1.4	9,000	Fig.1
		100R-14T8C	●	8	100	114	78	31.75	45	-	-	-	-	34	8	12.7	1.8	8,000				
		125R-14T10C	●	10	125	139	89	38.1	55	-	-	-	-	-	10	15.9	3.1	7,200	Fig.2			
		160R-14T12	●	12	160	174	110	50.8	70	-	-	-	-	63	11	19.1	4.9	6,300				
		200R-14T14	●	14	200	214	140	47.625	110	18	26	101.6	-	38	14	25.4	7.4	5,700	Fig.3			
		250R-14T16	●	16	250	264	140	47.625	110	18	26	101.6	-	38	14	25.4	10.5	5,100				
	315R-14T18	MTO	18	315	329	222	-	-	-	-	-	-	80	-	-	20.2	4,500	Fig.4				
	Extra Fine Pitch	MB45 - 080R-14T8C	●	8	80	94	70	25.4	20	13	-	-	-	-	50	27	6	9.5	Yes	1.3	9,000	Fig.1
		100R-14T10C	●	10	100	114	78	31.75	45	-	-	-	-	34	8	12.7	1.8	8,000				
		125R-14T13C	●	13	125	139	89	38.1	55	-	-	-	-	-	10	15.9	3.0	7,200	Fig.2			
		160R-14T16	●	16	160	174	110	50.8	70	-	-	-	-	63	11	19.1	4.8	6,300				
200R-14T18		●	18	200	214	140	47.625	110	18	26	101.6	-	38	14	25.4	7.2	5,700	Fig.3				
250R-14T20		●	20	250	264	140	47.625	110	18	26	101.6	-	38	14	25.4	10.4	5,100					

### Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10.


Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.

●: Standard Stock MTO: Made to order

## Parts

Description	Parts				
	Clamp screw	Wrench	Anti-seize compound	Arbor clamp bolt	
Face mill	SB-50110TRP	TTP-20	P-37	HH8X25	-
				-	W10X31
				HH10X30	-
				HH12X35	-
				-	-
Insert clamp tightening torque 4.5 N·m					
Shank Type	SB-50110TRP	TTP-20	P-37	-	-
				Insert clamp tightening torque 4.5 N·m	

Coat anti-seize compound thinly on portion of taper and thread prior to installation.

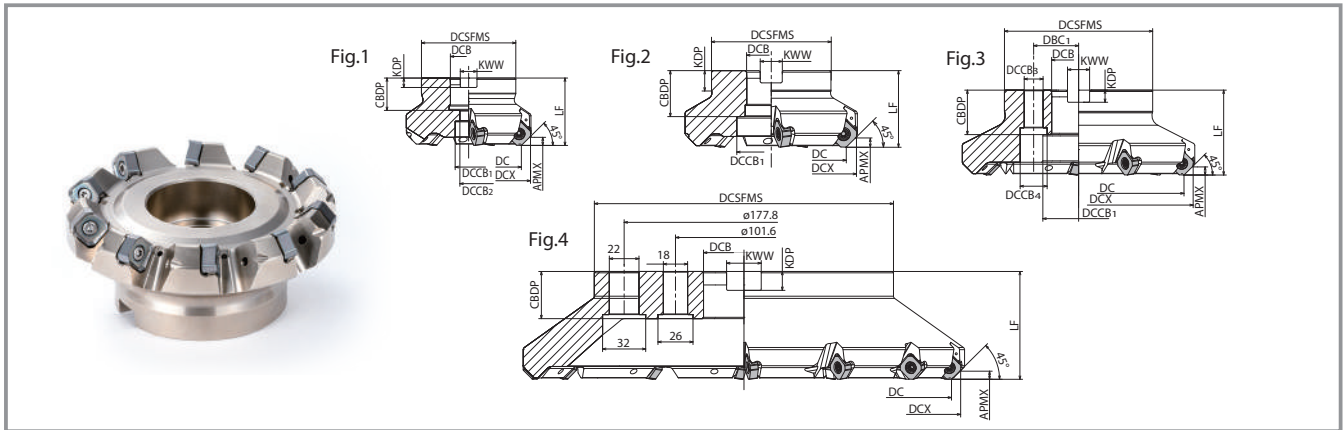

Toolholder dimensions

Description		Stock	Number of inserts	Dimensions (mm)											A.R. max(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min <sup>-1</sup> )	Shape							
				DC	DCX	DCSFMS	DCB	DCCB1	DCCB2	DCCB3	DCCB4	DBC1	LF	CBDP							KDP	KWW	APMX				
Coarse Pitch	MB45 - 040R-14T2C-M	●	2	40	54	38	16	13.5	9							19	5.6	8.4	6	13	-12	Yes	0.4	12,700	Fig.1		
	050R-14T3C-M	●	3	50	64	48		22	18	11					40	21	6.3	10.4					0.5	11,400			
	063R-14T4C-M	●	4	63	77	50									50	24	7	12.4					0.7	10,100			
	080R-14T5C-M	●	5	80	94	70	27	20	13						50	24	7	12.4	1.4	9,000	6	13	-12	Yes	1.9	8,000	Fig.2
	100R-14T5C-M	●	5	100	114	78	32	45							63	30	8	14.4	3.2	7,200							
	125R-14T6C-M	●	6	125	139	89	40	55			14	20	66.7		63	33	9	16.4	5.1	6,300							
	160R-14T7-M	●	7	160	174	110					18	26	101.6		63	35	14	25.7	7.3	5,700	6	13	-12	No	10.5	5,100	Fig.3
	200R-14T8-M	●	8	200	214	142	60	110							80				19.4	4,500							
	250R-14T10-M	●	10	250	264										80										19.4	4,500	
315R-14T14-M	MTO	14	315	329	222									80													Fig.4
Metric Fine Pitch	MB45 - 040R-14T3C-M	●	3	40	54	38	16	13.5	9						40	19	5.6	8.4	6	13	-12	Yes	0.3	12,700	Fig.1		
	040R-14T3C-22M	●																50									
	050R-14T4C-M	●	4	50	64	48	22	18	11						40	21	6.3	10.4					0.4	11,400			
	063R-14T5C-M	●	5	63	77	50									40	21	6.3	10.4	0.6	10,100	6	13	-12	Yes	1.4	9,000	Fig.2
	080R-14T6C-M	●	6	80	94	70	27	20	13						50	24	7	12.4	1.8	8,000							
	100R-14T8C-M	●	8	100	114	78	32	45							50	30	8	14.4	3.0	7,200							
	125R-14T10C-M	●	10	125	139	89	40	55			14	20	66.7		63	33	9	16.4	4.9	6,300	6	13	-12	No	7.0	5,700	Fig.3
	160R-14T12-M	●	12	160	174	110					18	26	101.6		63	35	14	25.7	10.2	5,100							
	200R-14T14-M	●	14	200	214	142	60	110							80				19.2	4,500					Fig.4		
250R-14T16-M	●	16	250	264										80													Fig.4
315R-14T18-M	MTO	18	315	329	222									80													Fig.4
Extra Fine Pitch	MB45 - 040R-14T4C-M	●	4	40	54	38	16	13.5	9						40	19	5.6	8.4	6	13	-12	Yes	0.3	12,700	Fig.1		
	040R-14T4C-22M	●																50									
	050R-14T5C-M	●	5	50	64	48	22	18	11						40	21	6.3	10.4					0.6	10,100			
	063R-14T6C-M	●	6	63	77	50									40	21	6.3	10.4	1.3	9,000	6	13	-12	Yes	1.7	8,000	Fig.2
	080R-14T8C-M	●	8	80	94	70	27	20	13						50	24	7	12.4	2.9	7,200							
	100R-14T10C-M	●	10	100	114	78	32	45							50	30	8	14.4	4.8	6,300							
	125R-14T13C-M	●	13	125	139	89	40	55			14	20	66.7		63	33	9	16.4	6.9	5,700	6	13	-13	No	10.1	5,100	Fig.3
	160R-14T16-M	●	16	160	174	110					18	26	101.6		63	35	14	25.7									
	200R-14T18-M	●	18	200	214	142	60	110							63	35	14	25.7									
250R-14T20-M	●	20	250	264										63	35	14	25.7										Fig.3

Maximum number of revolutions


Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10.

Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.


● Standard Stock MTO: Made to order

How to Install Double Screw

1. Insert the fine pitch side of the double screw into the toolholder and carefully rotate it until the screw stops.




2. To ensure that the holder and arbor are securely connected, provide a clearance of approx. 4 mm between the holder and arbor before tightening the screws.



3. Rotate the screw until there is no clearance, and check the holder is attached to the arbor.



# MB45 Shank Type

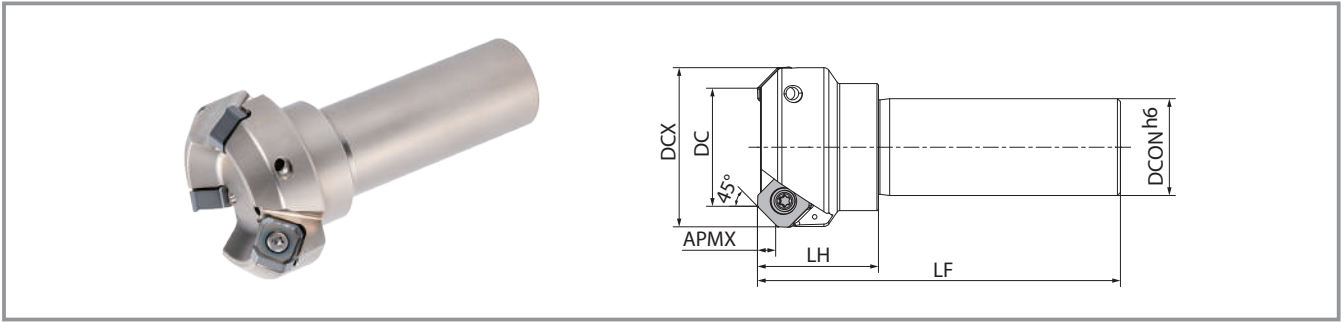

## Toolholder dimensions

	Stock	Number of inserts	Dimensions (mm)				A.R. max.(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min <sup>-1</sup> )			
			DC	DCX	DCON	LH						LF	APMX	
MB45-	40S32-14T2C	●	2	40	54	32	40	120	6	13	-12	Yes	0.9	12,700
	50S32-14T3C	●	3	50	64								1.0	11,400
	63S32-14T4C	●	4	63	77								1.1	10,100
	80S32-14T5C	●	5	80	94								1.5	9,000


### Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10. Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.

●: Standard Stock

## Precautions

### Applications



Facing

### How to mount inserts

1. Completely eliminate chips and dust from the insert mounting side.
2. Coat anti-seize compound thinly on portion of taper and thread of clamp screw prior to installation.
3. After mounting a clamp screw on the top edge of wrench, tighten the screw while keeping the insert pushed against the shim seat surface and holder surface (Fig.1).
4. Tighten the wrench in a direction parallel to the clamp screw.  
Recommended tightening torque ... 4.5 N·m
5. After tightening, check that there is no gap between the contact surface of the insert and the surface of the shim, or between the side surface of insert and the holder surface.

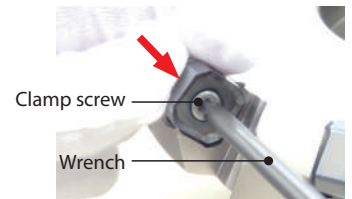


Fig.1

### Defining the Machining Diameter (DC)

With respect to the machining diameter (DC) specified in ISO\*, the numerical value of the machining diameter (Fig. 2) where the plane surface is finished depends on the insert. Please be careful.




Fig.2

Machining diameter at which the plane surface is finished (for ø125mm)


	GM	GH	SM	AM
Difference to machining diameter (DC)	-1.1	-2.0	-1.1	-1.1
Machining diameter (mm) at which the plane surface is finished	123.9	123.0	123.9	123.9
*Dimensional tolerance	0 -0.2			

\*GH has a larger double-edge size, so the machining diameter at which the plane surface is finished is smaller than other inserts.

### Precautions when machining


#### Precautions when machining aluminum

- Be sure to use within recommended conditions.
- Do not rotate more than the maximum speed listed on the main unit.  
\*The number of revolutions listed on the holder is the maximum number of revolutions without load.



#### Precautions for wet machining of steel

For wet machining, select PR1835 and use a cutting speed of 70% or less of the recommended condition as a guide.



MB45-125R-14T10C

SCREW:SB-50110TRP WRENCH:

**MAX 7,200 RPM**

Rotating at maximum speed is prohibited.



## Precautions

### How to use a wiper insert

1. Use when the feed amount per revolution [mm/rev] becomes large. The table below shows the standard feed amount per revolution and the number of wipers installed.

Feed per rotation	Number of wiper inserts	Pocket for wiper insert
$2.0 < f \text{ [mm/rev]} \leq 4.0$	1 pc	Pocket with "Single dot" (Fig. 3)
$4.0 < f \text{ [mm/rev]}$	2 pcs	"Single dot" and "Double dots" pockets (Figs. 3, 4) * Only holders with 12 or more inserts have "Double dots"

Fig. 3



Fig. 4



"Double dots" are placed in the diagonal pocket of "Single dot"  
\* For only holders with 12 or more inserts

2. Chipbreaker recommended for use with wiper insert

	GM chipbreaker	GH chipbreaker	SM chipbreaker	AM chipbreaker
Wiper Insert	✓	Not recommended	✓	Not recommended

3. Install the wiper insert correctly as shown in Fig. 5.

\* Fig. 6 shows the insert incorrectly attached to the holder.

Fig. 5



Fig. 6





# Milling Solution

Achieving Unprecedented Tool Life

